Project ADDENDUM Section 00 91 13.11 42/17

Page 1 of 1

ADDENDUM NUMBER: TWO

ISSUED BY: SEPW Architecture Inc.

109 – 3725 Pasqua St., Regina, SK. S4S 6W8

PH. (306) 569-2255

PROJECT: INTERIOR RENOVATION

PROJECT #42/17

REGINA, SASKATCHEWAN

This Addendum forms part of the Contract Documents and amends the original Drawings and Specifications dated 2018-07-13, previous Addenda if applicable and as noted below. This Addendum consists of 1 page plus attached Specifications and Attachments as listed below. Ensure that all parties are aware of all items included in this Addendum.

The following revised or additional Attachments accompany and form an integral part of this Addendum:

Attachment	
AR 1 Security Bars	
AR 2 Security Bars	
AR 3 Security Bars	

A-2-1 REFERENCE SECTION 05 50 00 METAL FABRICATIONS

ADD: the following clause to Section 05 50 00:

2.8 SECURITY BARS


- 1. Galvanized metal.
- 2. As noted in drawings.

A-2-2 REFERENCE DRAWING A2 & M3.1

CLARIFICATION: provide security bars as detailed in drawings AR1, AR2 and AR3 in locations as noted in drawings. Adjust dimensions to suit duct size.


A-2-3 GENERAL QUESTIONS

- 1. Q: Does Glycol have to be drained for whole building? A: No.
- 2. Q: Approximately how many gallons of glycol will have to be stored A: The hydronic heating system does not have glyclol in it.

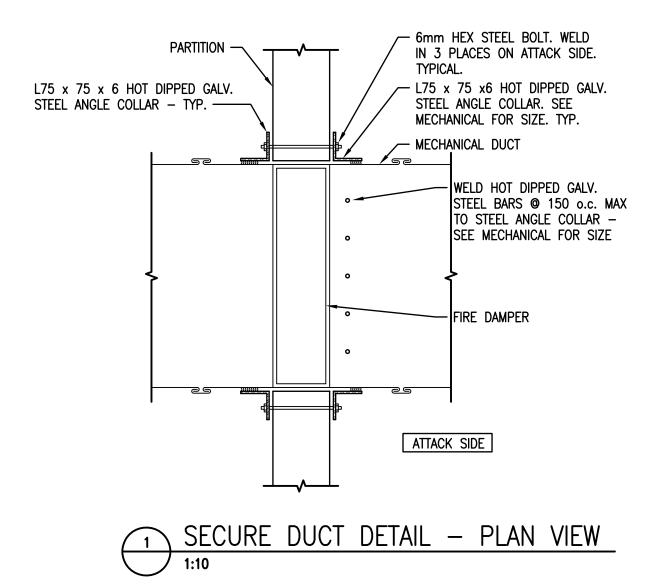


2018/10/10 X:\SEPW PROJECT FILES\2017\42-2017 HSU F DIV HQ BLDG\ACAD\WORKING DRAWINGS\AR SHEETS\AR 1



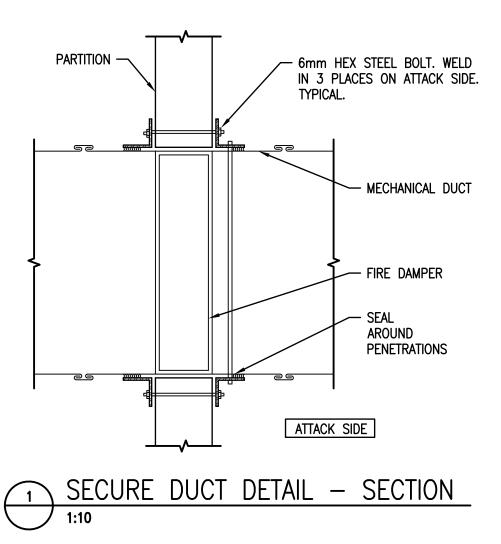

 $2018/10/10 \quad X:\\ SEPW PROJECT FILES\\ 2017\\ 42-2017 \ HSU F DIV HQ BLDG\\ ACAD\\ WORKING DRAWINGS\\ AR SHEETS\\ AR 1$



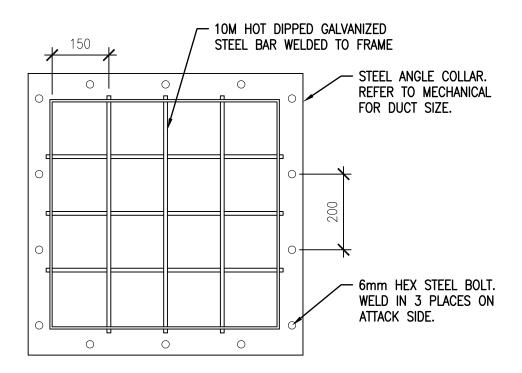

SECURE DUCT DETAIL — ELEVATION 1:10

REFER TO MECHANICAL FOR DUCT LOCATIONS. PROVIDE AT ALL SECURE WALL LOCATIONS, REFER TO PARTITION SCHEDULE.

2018/10/10 X:\SEPW PROJECT FILES\2017\42-2017 HSU F DIV HQ BLDG\ACAD\WORKING DRAWINGS\AR SHEETS\PLOT FILES\AR 1 2 3

