

SEAL:

1	A	ISSUED FOR ADDENDUM 1	2018/12/04
0		ISSUED FOR TENDER	2018/06/27
Revisions/		Description/Description	Date/Date
Client/client			


TRANSPORT CANADA

Project title/Titre du projet
SANDSPIT, B.C.
TRANSPORT CANADA
SANDSPIT AIRPORT
LIGHTING UPGRADE

Consultant signature only
Designed by/Conçopi par JD
Drawn by/Dessiné par JD
Project Manager/Administrateur de Projets NED/NEDEN
Approved Manager/Approbateur des Travaux Généraliste régionale, Services Distribution et de génie, TRSC MARC BÉLLEFÈRE

Drawing title/Titre du dessin
COMBINED SERVICES BUILDING
UPPER FLOOR PLAN
LIGHTING RENOVATION

Project No./No. du projet R.089425.001	Sheet/Feuille E303 11 of 18	Revision no. 1
---	--	-----------------------------

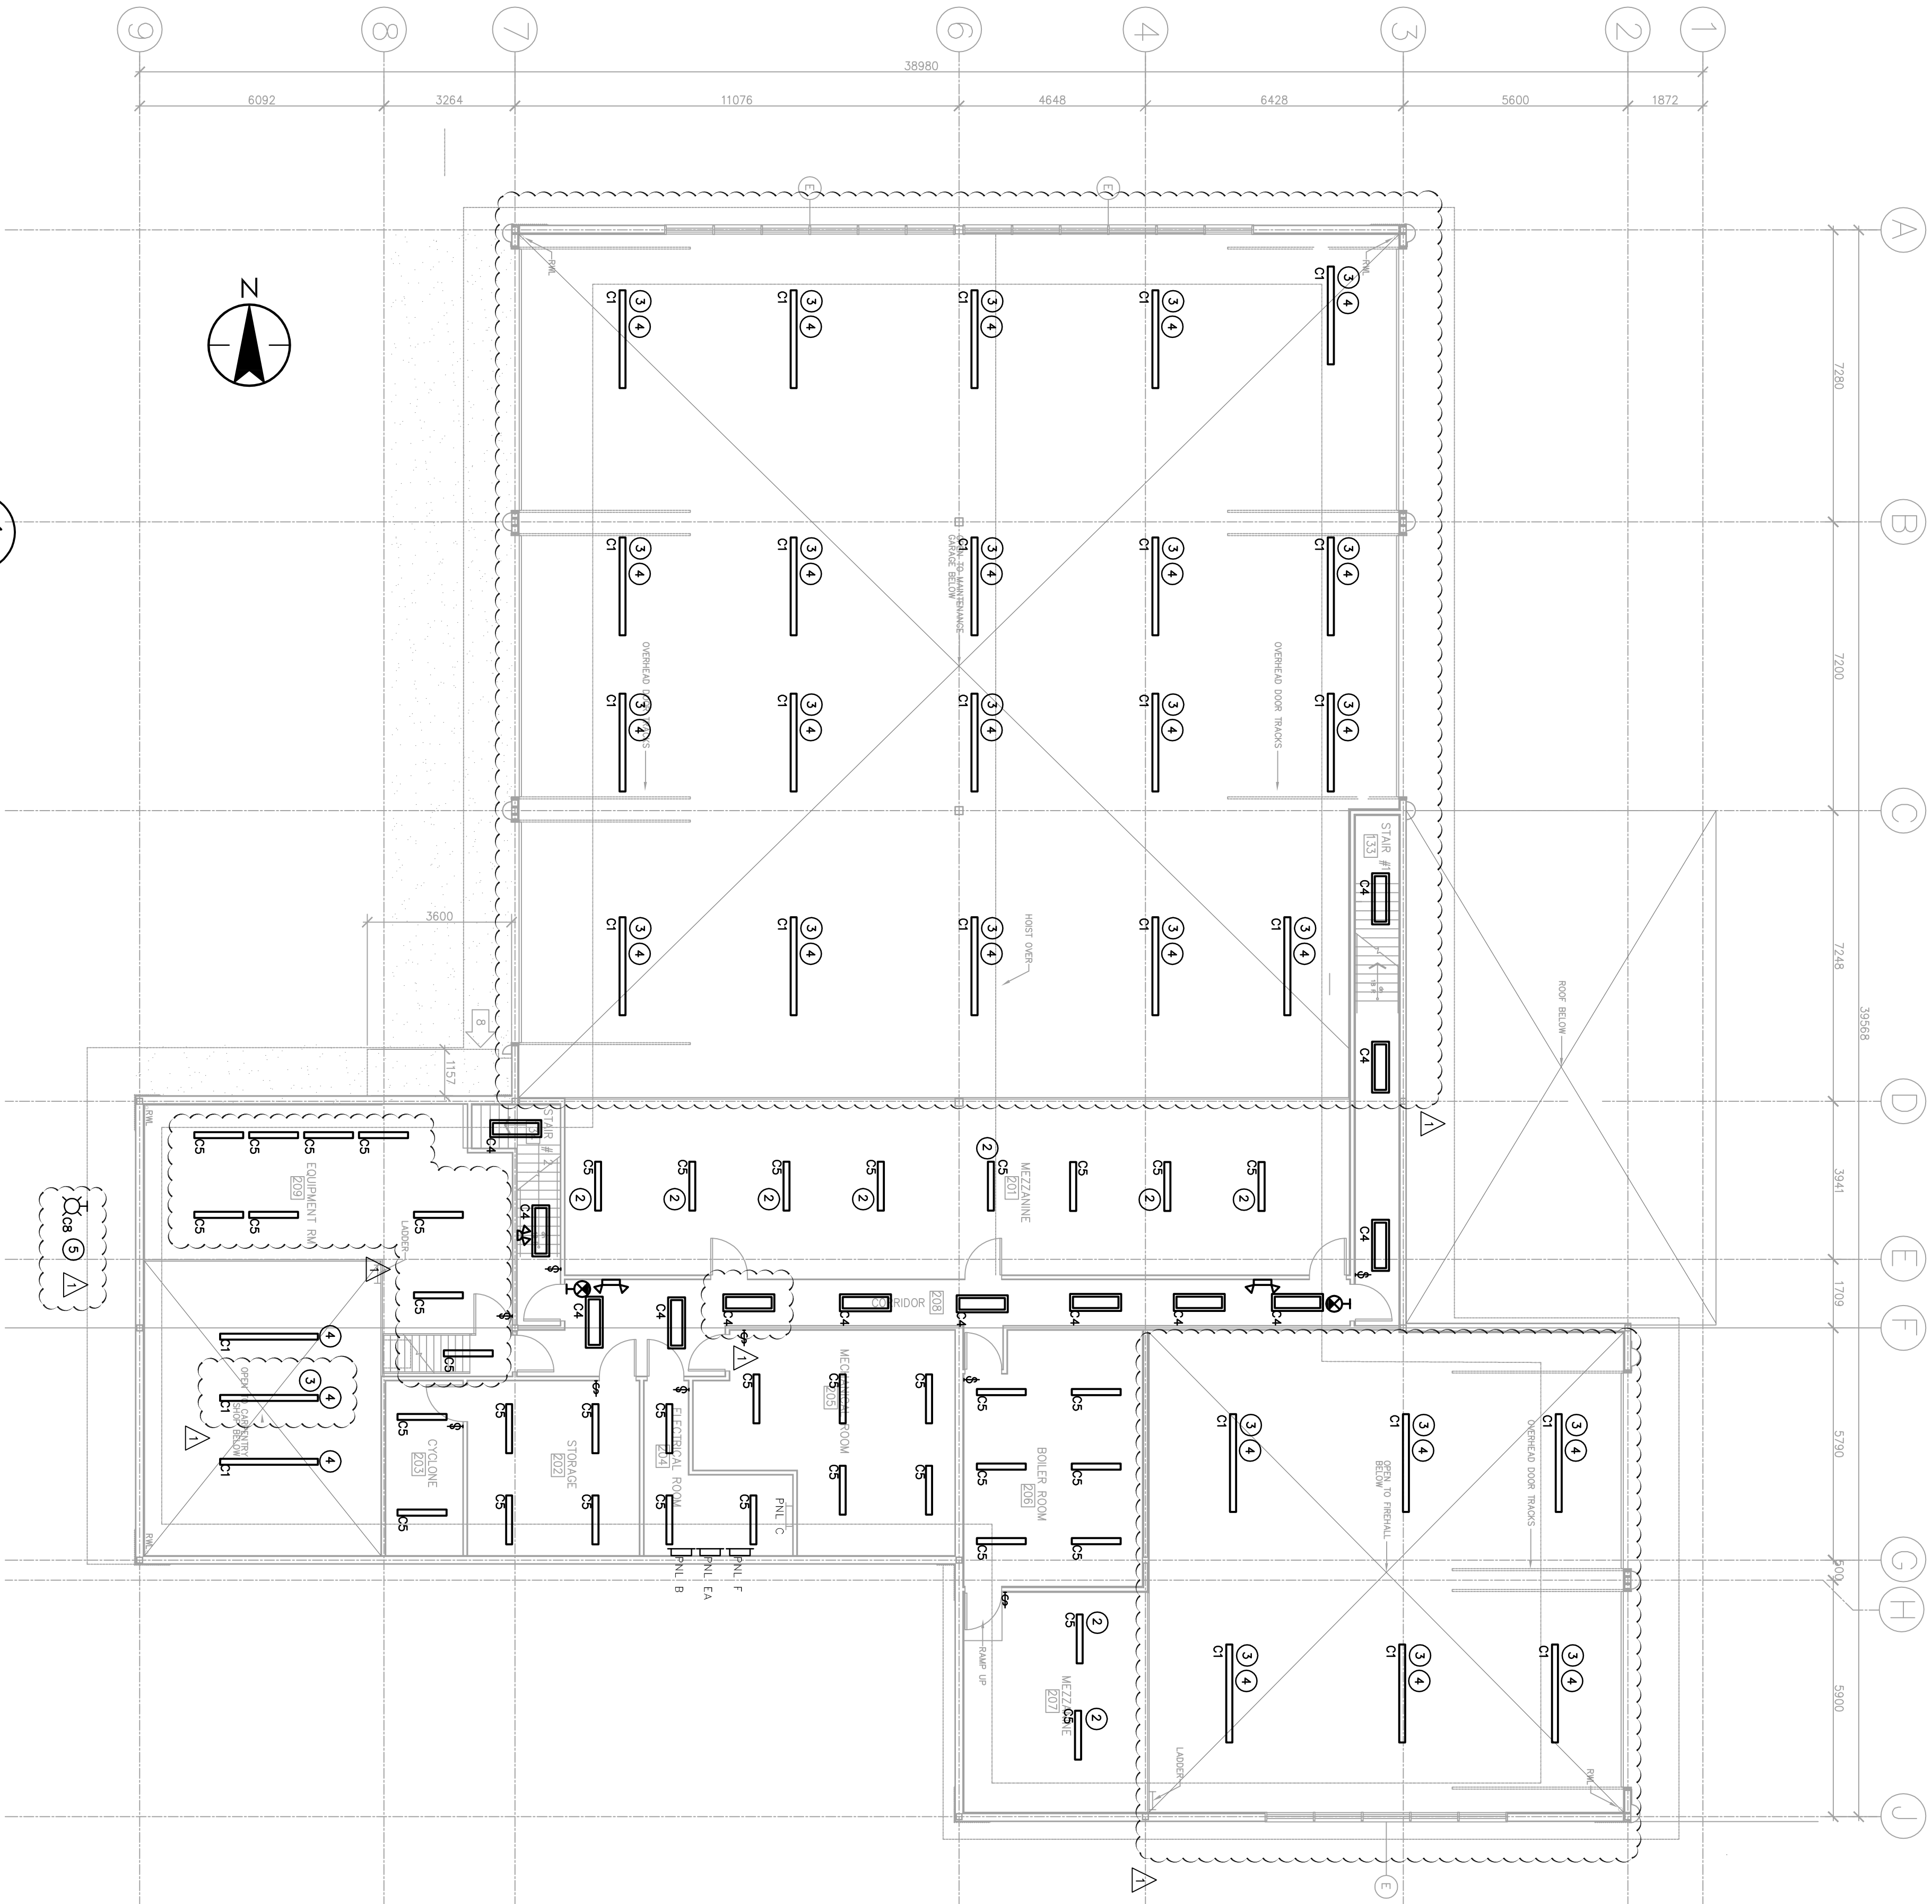

- KEY NOTES - LIGHTING RENOVATION - CSB
- 1

NO LONGER USED.
- 2

NEW LUMINAIRE IN NEW LOCATION - EXTEND EXISTING WIRING FROM ADJACENT LUMINAIRE BEING REMOVED.
- 3

EXTEND EXISTING AREA LIGHTING CONDUIT AND WIRING SYSTEM TO NEW LUMINAIRE LOCATION FOR 120V CONNECTION.
- 4

NEW LINEAR LED FIXTURE TO BE PENDANT MOUNTED, SUSPEND AT THE BOTTOM OF TRUSS LEVEL, CLEAR OF ANY OBSTRUCTION, EXTEND WIRING FROM EXISTING
- 5

NEW TYPE C6 LUMINAIRE TO REPLACE EXISTING LUMINAIRE, SUSPEND AT THE BOTTOM OF TRUSS LEVEL, CLEAR OF WALL, PROVIDE COVER FOR EXISTING BOX AND EXTEND WIRING IN NEW SURFACE MOUNT ROSSGROM FROM TOP OF UPPER WALL PORTION REFER TO PHOTO H ON E304.

