


GENERAL NOTES:

- ALL WORK THAT AFFECTS SITE OPERATIONS TO TAKE PLACE BETWEEN THE HOURS OF 1:00AM SATURDAY AND 11:00PM SUNDAY.
- ENSURE ALL NEW AND EXISTING ELECTRICAL DISTRIBUTION EQUIPMENT MODIFIED IN THIS CONTRACT IS IDENTIFIED IN ACCORDANCE WITH THE FACILITIES MAINTENANCE PROGRAM.


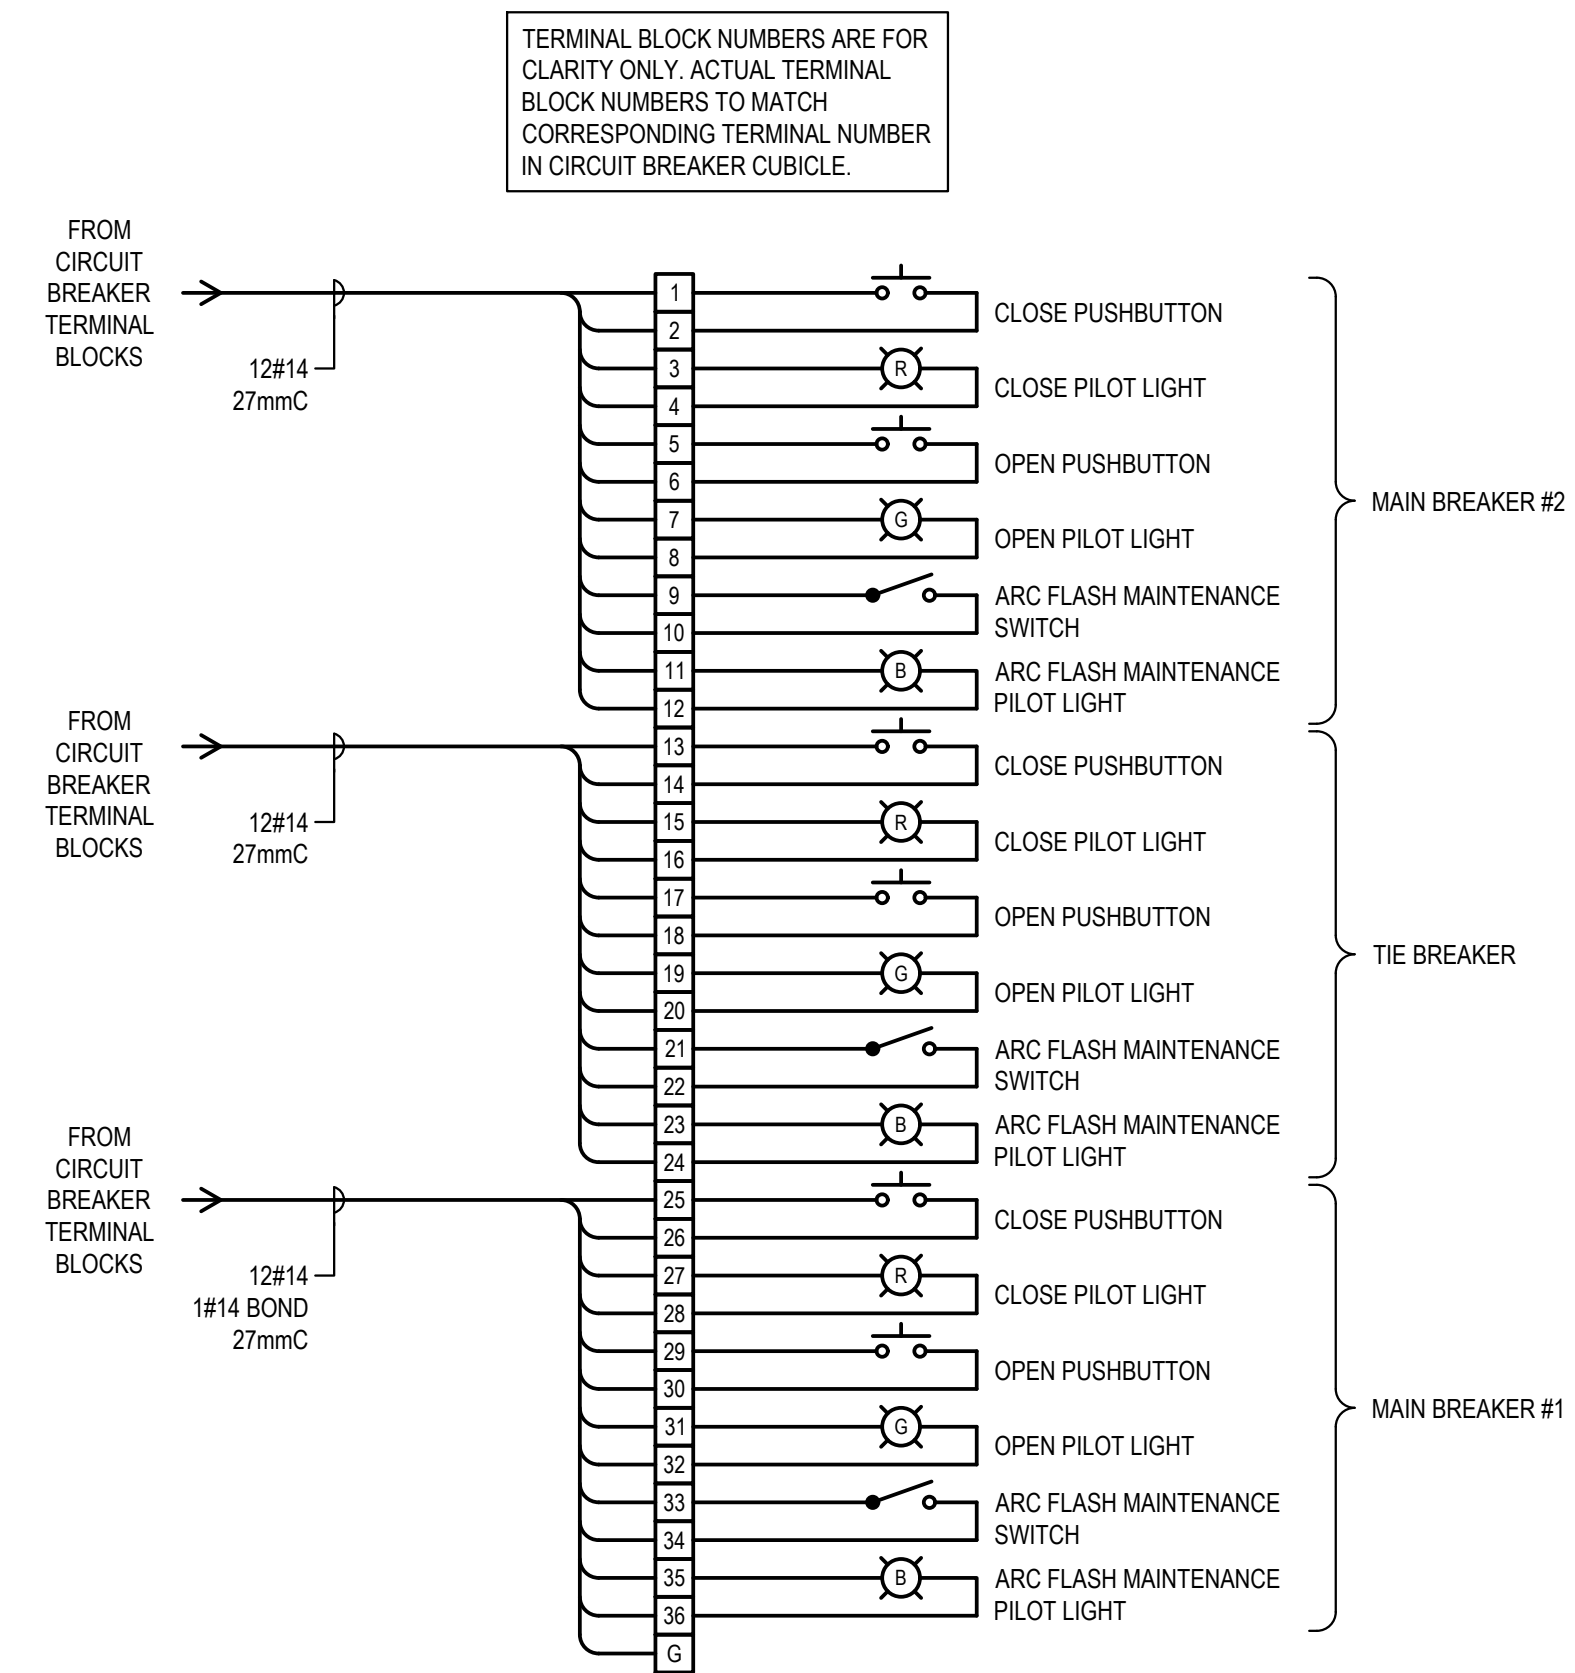


1A
E2

PROPOSED REMOTE CONTROL STATION SCHEMATIC

SCALE: N.T.S.

EQUIPMENT SCHEDULE	
NO.	DESCRIPTION
1	30mm RED ILLUMINATED MOMENTARY PUSHBUTTON
2	30mm GREEN ILLUMINATED MOMENTARY PUSHBUTTON
3	30mm BLUE ILLUMINATED MAINTAINED 2-POSITION SWITCH
4	508mm x 508mm x 203mm CABINET WITH VIEWING WINDOW AND INTERNAL MOUNTING PLATE
5	KEY LOCK
6	LAMICOID IDENTIFICATION PLATE
7	LABEL CARRIER, LABEL AND PROTECTIVE STRIP
8	TERMINAL MARKER
9	TERMINAL BLOCK
10	GROUND TERMINAL BLOCK
11	END BRACKET
12	MOUNTING RAIL
13	PVC WIREWAY

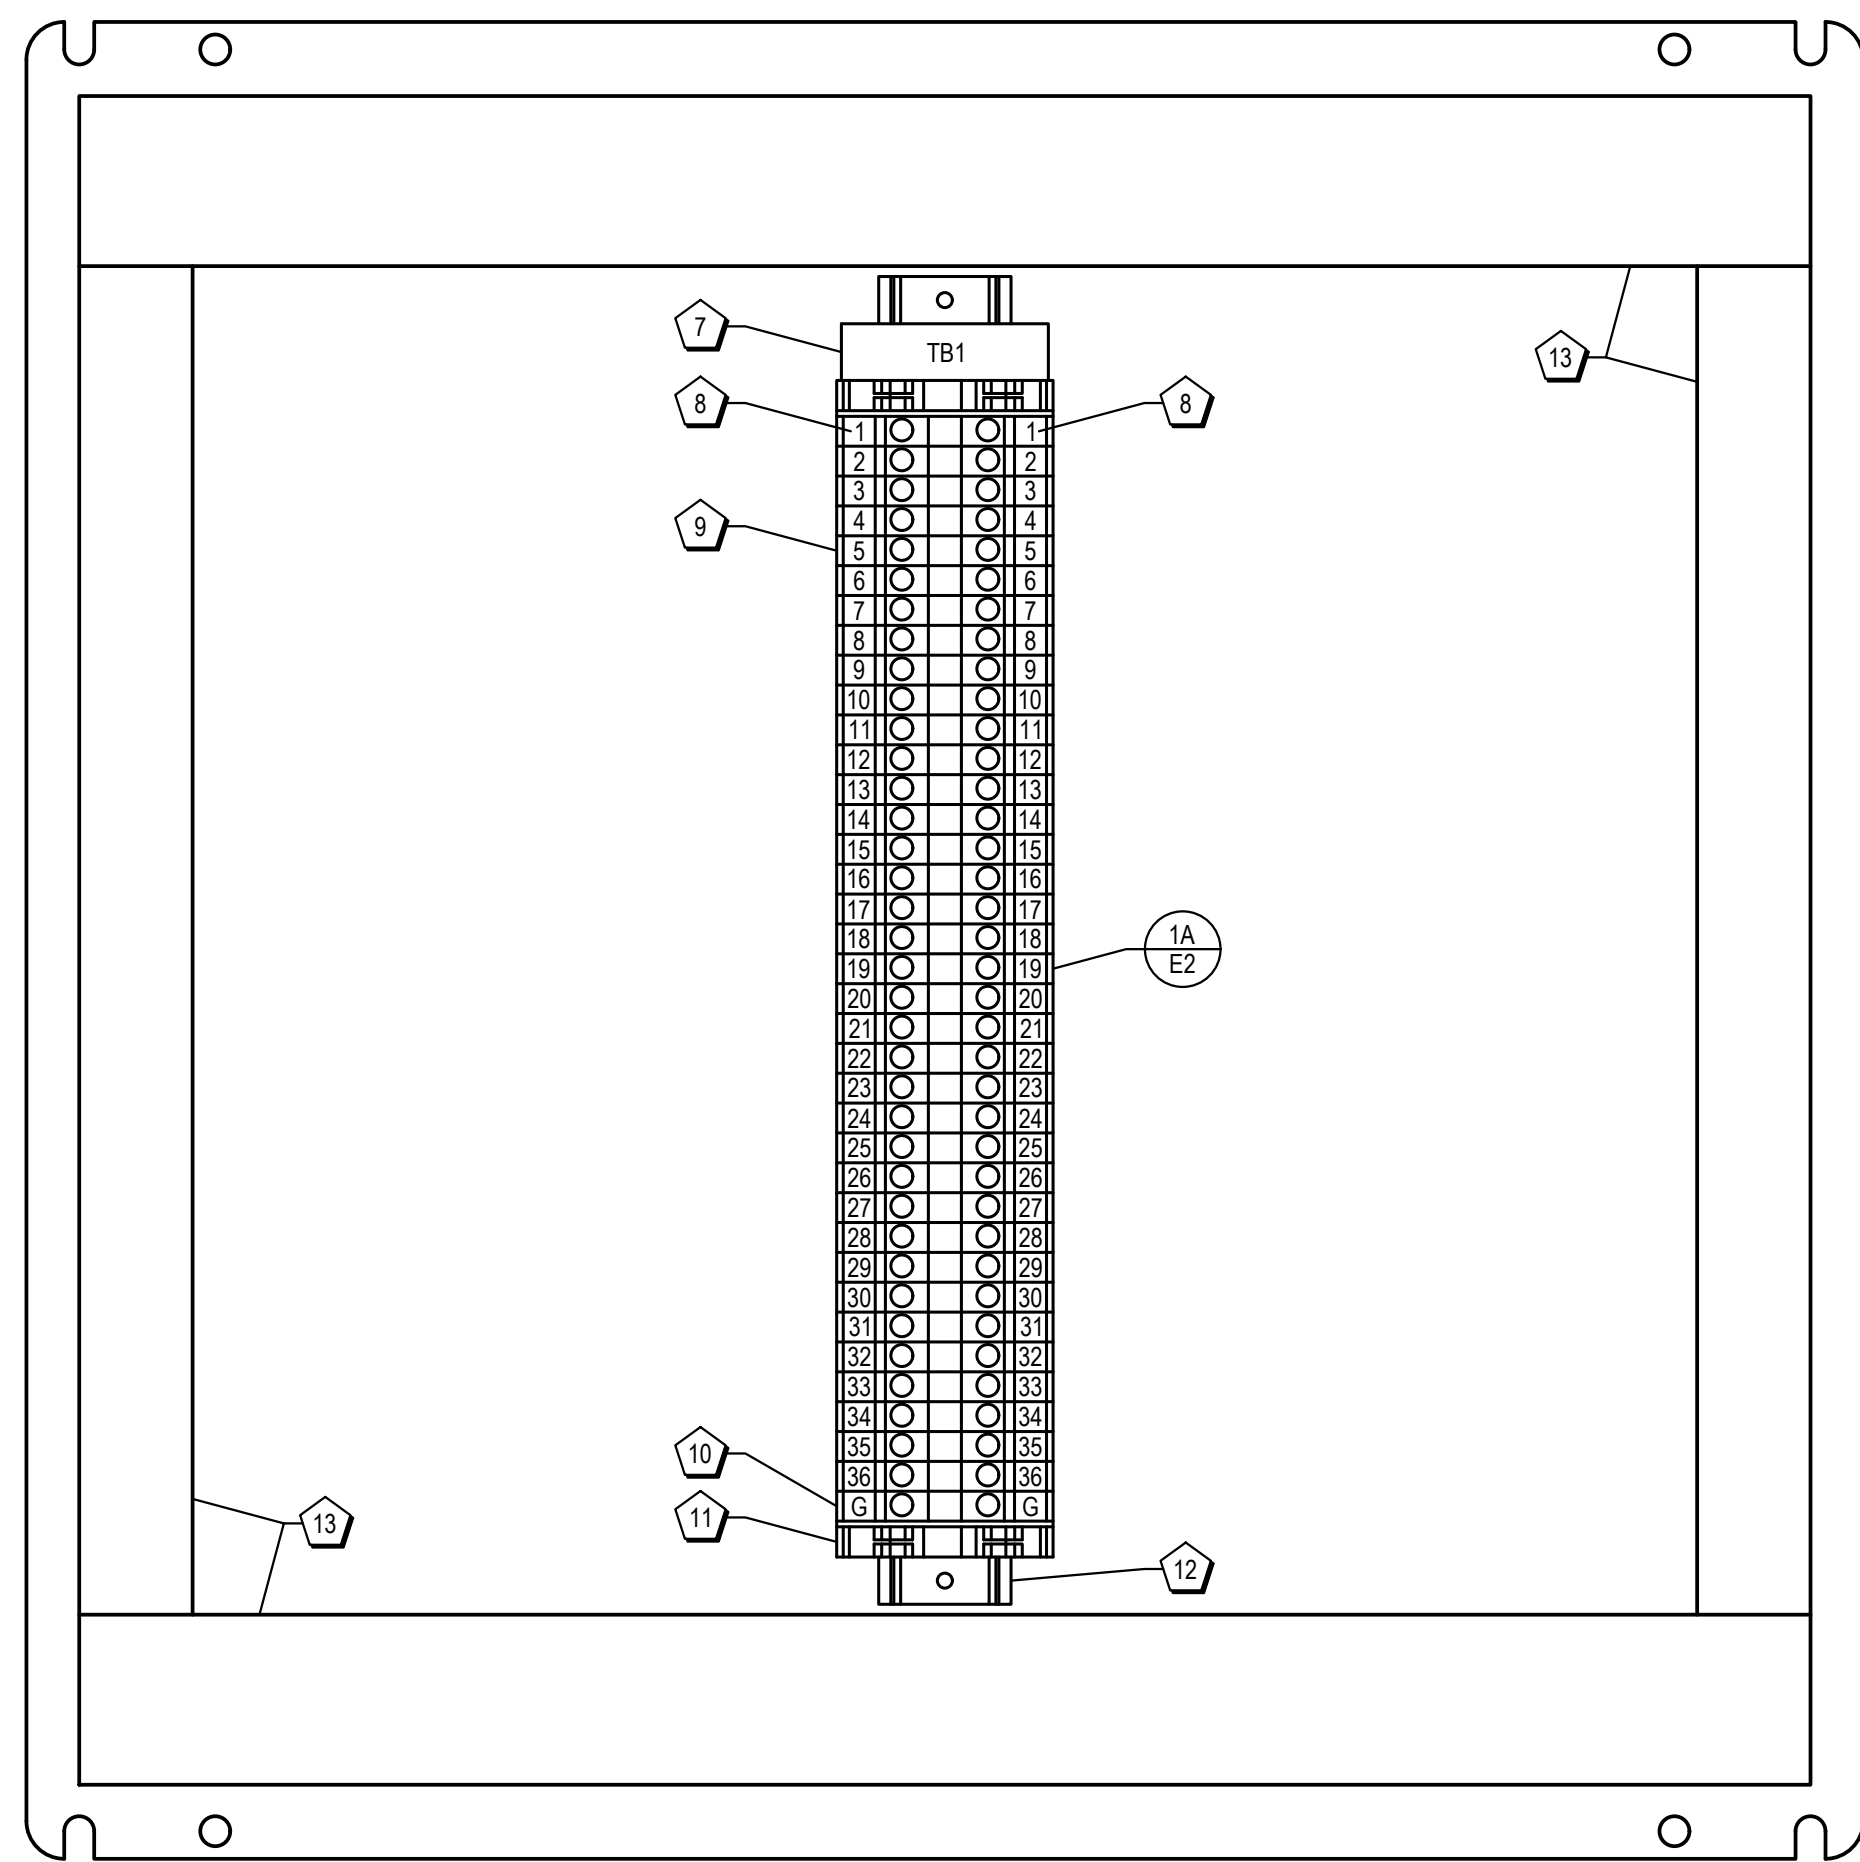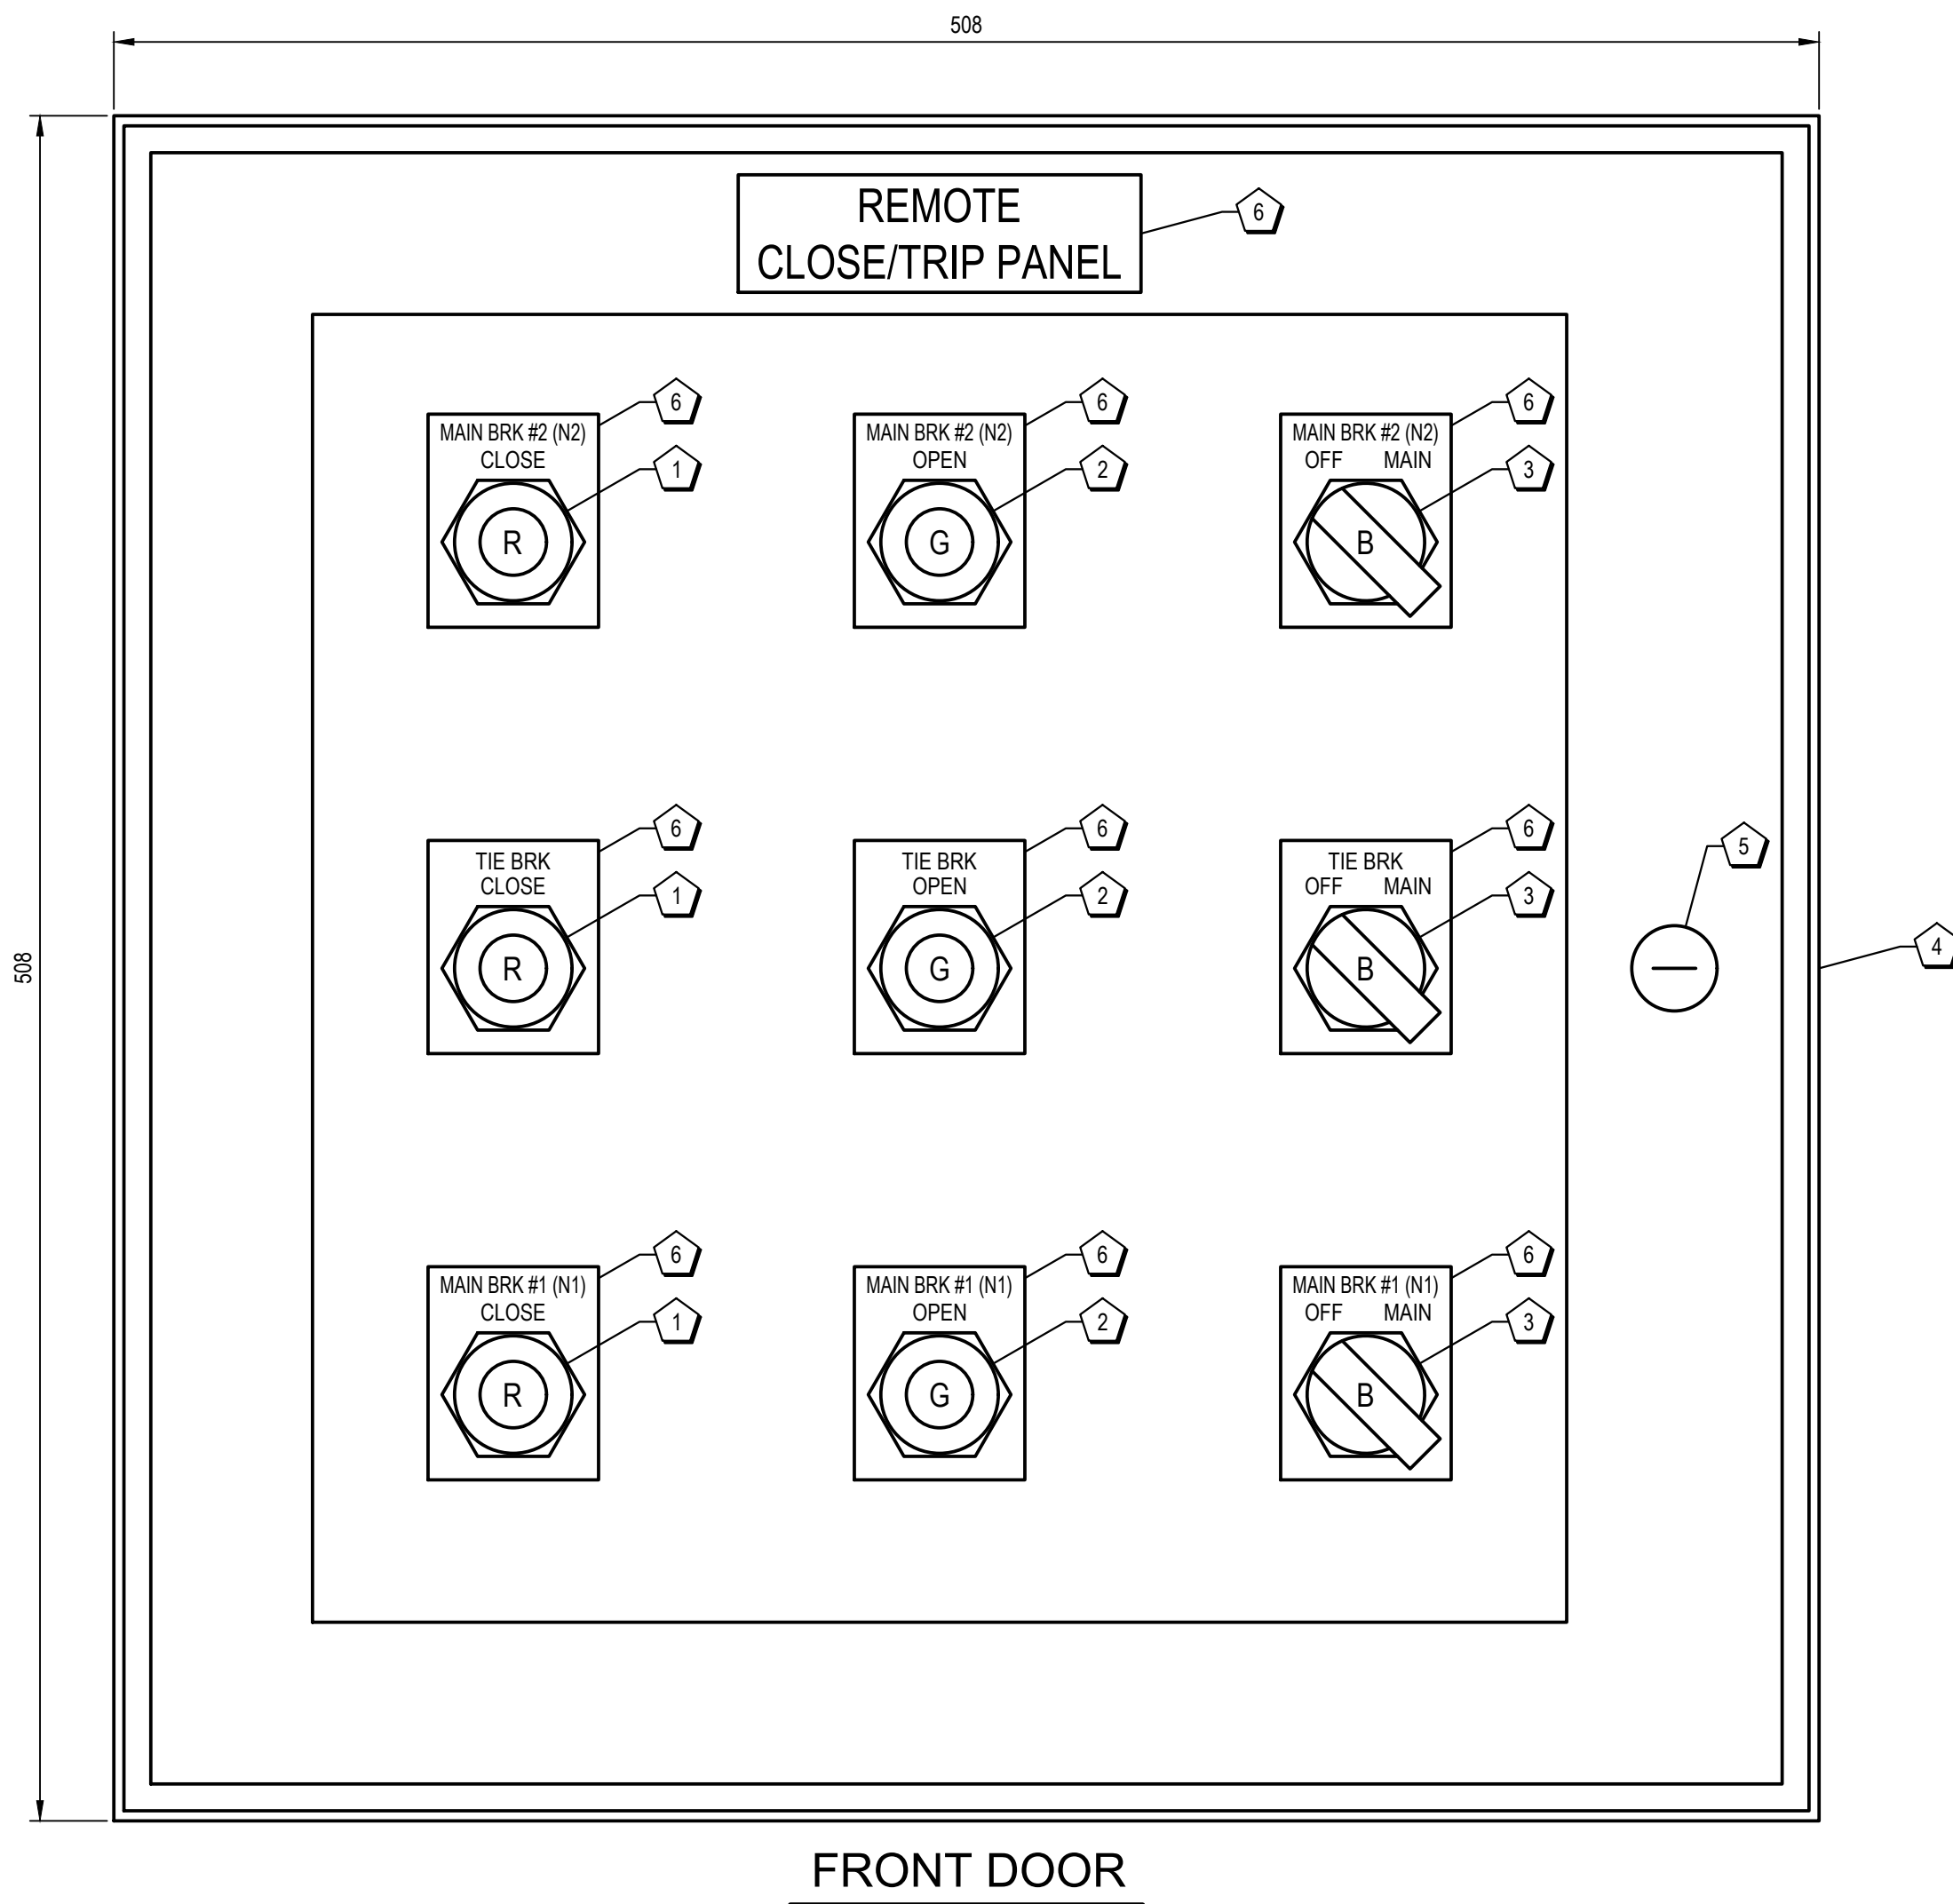

1
E1

PROPOSED REMOTE CONTROL STATION PANEL LAYOUT

SCALE: 1:2

0mm 50mm 100mm 150mm 200mm 250mm

0	ISSUED FOR TENDER	OCT 22 2018
revisions		date
project	ELECTRICAL SWITCH GEAR REPLACEMENT SUMMERSIDE TAXATION CENTRE SUMMERSIDE, PEI	project

PROPOSED REMOTE CONTROL STATION DETAIL AND SCHEMATIC

designed	R.A.P.	conçu
date	OCTOBER 2018	
drawn	D.D.	dessiné
date	OCTOBER 2018	
approved	B.E.T.	approuvé
date	OCTOBER 2018	
Tender		Soumission

PWGSOC Project Manager	Administrateur de projets TPSSC
project	projet

R.097303.001

drawing no.	no. du dessin
E2 OF 6	