


Caption



- ① Overall dimensions with cabled auxiliary contacts mounted (only 3Q 1SY)

Motor operator


T4




T5

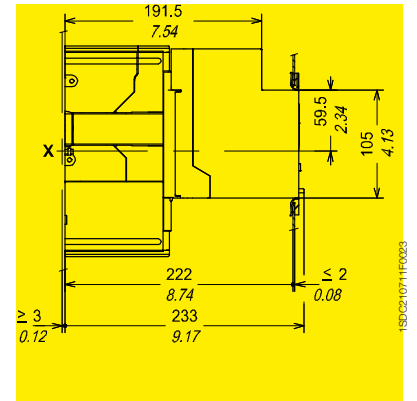


Flange for the compartment door (supplied as standard)



Drilling template of the compartment door




With flange




Without flange

Drilling template for support sheet

T4




3 POLES




4 POLES

T5



3 POLES



4 POLES