SPECIFICATION SLIPWAY RECONSTRUCTION HERMITAGE, NL PROJECT NUMBER 721935


PREPARED FOR

Fisheries and Oceans Canada

DATE

May 1, 2019 Revision 2





To practice Fromenional Engineering In Newfoundised and Labrador. Formit No. as lesued by APEGN Form which is valid for the year 2017

LIST OF DRAWINGS

Slipway Reconstruction Hermitage, NL Project Number 721935 Page 1

2019-03-03

DRAWING NO	TITLE
C1 of 7	Demolition Plan
C2 of 7	New Site Plan
C3 of 7	Demolition - Work Area A
C4 of 7	New Work - Work Area A
C5 of 7	New Work - Work Area A
C6 of 7	Demolition - Work Area B
C7 of 7	New Work - Work Area B

·		~ . ' 00 01 11
	LIST OF CONTENTS	Section 00 01 11
Olimina. Dagangtungtian		Desce 1
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

<u>Section</u>	<u>Title</u>	Pages
01 10 10		13
01 29 83	PAYMENT PROCEDURES FOR TESTING LABORATORY SERVICES	2
01 33 00	SERVICES SUBMITTAL PROCEDURES	6
01 35 00		_
01 35 24		7
01 35 29		14
01 35 43	ENVIRONMENTAL PROCEDURES	5
01 45 00	TESTING AND QUALITY CONTROL	4
01 50 00	TEMPORARY FACILITIES	3
01 56 00	TEMPORARY BARRIERS AND ENCLOSURES	2
01 59 20	SITE INSPECTOR'S CAMP AND BOARD	2
01 61 00	COMMON PRODUCT REQUIREMENTS	5
01 74 11	CLEANING	2
01 74 21	CONSTRUCTION/DEMOLITION WASTE MANAGEMENT AND	
	DISPOSAL	6
01 78 00	CLOSEOUT SUBMITTALS	2
02 41 16	<i>,</i>	3
03 10 00	CONCRETE FORMING AND ACCESSORIES	5
03 20 00	CONCRETE REINFORCING	5
03 30 00	CAST-IN-PLACE CONCRETE	12
03 37 26	UNDERWATER PLACED CONCRETE	5
05 50 00	METAL FABRICATIONS	5
06 05 73	WOOD TREATMENT	4
07 92 10	JOINT SEALING	7
31 23 25	ROCK FILL	2
31 32 21	GEOTEXTILES	5
31 53 13	TIMBER CRIBWORK	8
31 53 16		7
	PILE FOUNDATIONS GENERAL REQUIREMENTS	8
31 62 19		3 5
32 11 23	GRANULAR BASE COURSES	5

Appendix A - Project Effects Determination Report

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

. 1

1.1 SCOPE

The work covered under this contract consists of the furnishing of all plant, labour, equipment and material for slipway reconstruction at Hermitage, Newfoundland and Labrador, in strict accordance with specifications and accompanying drawings and subject to all terms and condition of contract.

1.2 DESCRIPTION OF WORK

.1 In general, work under this contract consist of but will not necessarily be limited to the following:

- .1 Demolition and removal of: (i) the existing slipway and launchway in the area noted as Work Area A; and (ii) the existing boardwalk in the area noted as Work area B including complete extraction of the existing piles/posts. All debris removed is to be disposed of at an approved waste disposal site. The Contractor will be required to obtain the necessary approvals from the operators of the waste site for the disposal of the demolition debris. Note that creosote timber is present, which will require special handling and disposal (all weigh bill/tipping slips to be provided to Departmental Representative).
- .2 Construction of a new slipway (post/beam construction), with toe cribbing, as indicated on the drawings.
- .3 Construction of a new concrete launchway, complete with toe cribbing, as indicated on the drawings.
- .4 Construction of a new boardwalk complete with a pile foundation, as indicated on the drawings.
- .5 Supply and installation of

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03

structural timber for cribwork, wheelguard, wheelguard blocking, posts, beams, caps, runners, decking railing, bracing, and associated hardware.

- .6 Supply and installation of rock fill to the underside of the beams for the new slipway, as noted on the drawings.
- .7 Supply and installation of rock and gravel fill and Class "A" granular base, as noted on the drawings.

1.3 SITE OF WORK

.1 Work will be carried out at Hermitage, NL, in the location as shown on the accompanying drawings.

1.4 DATUM

- .1 Datum used for this project is Lowest Normal Tides (LNT) and is assumed to be 3.013 metres below CHS BM 96F9092. Confirm with Departmental Representative prior to construction.
- .2 Bidders are advised to consult the Tide Tables issued by Fisheries and Oceans in order to make sure of the tidal conditions affecting work.

1.5 FAMILIARIZATION WITH SITE

. 1

Before submitting a bid, Bidders can visit the site and its surroundings at their own expense and schedule, to review and verify the form, nature, and extent of the work, materials needed for the completion of the work, the means of access to the site, severity, exposure and uncertainty of weather, soil conditions, any accommodations they may require, and in general shall obtain all necessary information as to risks, contingencies and other circumstances which may influence or

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 3
Project Number 721935		2019-03-03

affect their bid or costs to do the work. No allowance shall be made subsequently in this connection on account of error or negligence to properly observe and determine the conditions that will apply.

.2 Contractors, bidders or those they invite to site are to review specification Section 01 35 29 - Health and Safety Requirements before visiting site. Take all appropriate safety measures for any visit to site, either before or after acceptance of bid.

1.6 CODES AND STANDARDS

- .1 Perform work in accordance with the latest edition of the National Building Code of Canada, NFPA 307: Construction and Fire Protection of Marine Terminals, Piers, and Wharves, and any other code of provincial or local application including all amendments up to project bid closing date provided that in any case of conflict or discrepancy, the more stringent requirements shall apply.
- .2 Materials and workmanship must meet or exceed requirements of specified standards, codes and referenced documents.

1.7 TERM DEPARTMENTAL .1 REPRESENTATIVE

Unless specifically stated otherwise, the term Departmental Representative where used in the Specifications and on the Drawings shall mean the Engineer as defined in the General Conditions of the Contract.

1.8 SETTING OUT WORK

- .1 Set grades and layout work in detail from control points and grades established by Departmental Representative.
- .2 Assume full responsibility for and execute complete layout of work to locations, lines and elevations indicated or as

GENERAL INSTRUCTIONS	Section 01 10 10
	Page 4
	2019-03-03
	GENERAL INSTRUCTIONS

directed by Departmental Representative.

- .3 Provide devices needed to layout and construct work.
- .4 Supply such devices as straight edges and templates required to facilitate Departmental Representative's inspection of work.
- .5 Supply stakes and other survey markers required for laying out work.

1.9 COST BREAKDOWN

- .1 Before submitting first progress claim submit breakdown of Contract price in detail as directed by Departmental Representative and aggregating contract price.
- .2 Provide cost breakdown in same format as the numerical and subject title system used in this specification project manual and thereafter sub-divided into major work components as directed by Departmental Representative.
- .3 Upon approval by Departmental Representative, cost breakdown will be used as basis for progress payment.
- .4 All work items not designated in the unit price table as a measurement for payment, are to be included in the Lump Sum Arrangement.

1.10 WORK SCHEDULE

.1 Submit within 7 work days of notification of acceptance of bid, a construction schedule showing commencement and completion of all work within the time stated on the Bid and Acceptance Form and the date stated in the bid acceptance letter.

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction		Page 5
Hermitage, NL Project Number 721935		2019-03-03

- .2 Provide sufficient details in schedule to clearly illustrate entire implementation plan, depicting efficient coordination of tasks and resources, to achieve completion of work on time and permit effective monitoring of work progress in relation to established milestones.
- As a minimum, work schedule to be prepared and submitted in the form of Bar (GANTT) Charts, indicating work activities, tasks and other project elements, their anticipated durations and planned dates for achieving key activities and major project milestones provided in sufficient details and supported by narratives to demonstrate a reasonable plan for completion of project within designated time. Generally Bar Charts derived from commercially available computerized project management system are preferred but not mandatory.
- .4 Submit schedule updates on a minimum monthly basis and more often, when requested by Departmental Representative, due to frequent changing project conditions. Provide a narrative explanation of necessary changes and schedule revisions at each update.
- .5 The schedule, including all updates, shall be to Departmental Representative's approval. Take necessary measures to complete work within approved time. Do not change schedule without Departmental Representative's approval.
- .6 All work on the project will be completed within the time indicated on the Bid and Acceptance Form.

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 6
Project Number 721935		2019-03-03
1.11 ABBREVIATIONS .	1 Following abbreviations of specifications have been uspecification and on the contraction and specification and specif	sed in this

CGSB - Canadian Government Specifications Board

CSA - Canadian Standards Association NLGA - National Lumber Grades Authority ASTM - American Society for Testing and Materials

.2 Where these abbreviations and standards are used in this project, latest edition in effect on date of bid call will be considered applicable.

1.12 QUARRY AND EXPLOSIVES

.1 Make own arrangements with Provincial authorities and owners of private properties, for the quarrying and transportation of rock and all materials and machinery necessary for work over their property, roads or streets as case may be.

1.13 SITE OPERATIONS

- .1 Arrange for sufficient space adjacent to project site for conduct of operations, storage of materials and so on. Exercise care so as not to obstruct or damage public or private property in area. Do not interfere with normal day-to-day operations in progress at site. All arrangements for space and access will be made by Contractor.
- .2 Remove snow and ice as required to maintain safe access in a manner that does not damage existing structures or interfere with the operations of others.

1.14 PROJECT MEETINGS

.1 Departmental Representative will arrange project meetings and assume responsibility for setting times and recording minutes.

	GENERAL	INSTRUCTIONS	Section (10 10
Slipway Reconstruction Hermitage, NL			Page 7	
Project Number 721935			2019-03-0)3

- .2 Project meetings will take place on site of work unless so directed by the Departmental Representative.
- .3 Departmental Representative will assume responsibility for recording minutes of meetings and forwarding copies to all parties present at the meetings.
- .4 Have a responsible member of firm present at all project meetings.

1.15 PROTECTION

- .1 Store all materials and equipment to be incorporated into work to prevent damage by any means.
- .2 Repair or replace all materials or equipment damaged in transit or storage to the satisfaction of Departmental Representative and at no cost to Canada.

1.16 EXISTING SERVICES

- .1 Where work involves breaking into or connecting to existing services, carry out work at times directed by governing authorities, with minimum of disturbance to site operations, pedestrian, vehicular traffic and tenant operations.
- .2 Before commencing work, establish location and extent of service lines in area of work and notify Departmental Representative of findings.
- from Departmental Representative for any shut-down or closure of active service or facility. This includes disconnection of electrical power and communication services to tenant's operational areas. Adhere to approved schedule and provide notice to affected parties.
- .4 Provide temporary services when directed

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 8
Project Number 721935		2019-03-03

by Departmental Representative to maintain critical facility systems.

- .5 Provide adequate bridging over trenches which cross walkways or roads to permit normal traffic.
- .6 Where unknown services are encountered, immediately advise Departmental Representative and confirm findings in writing.
- .7 Protect, relocate or maintain existing active services as required. When inactive services are encountered, cap off in manner approved by authorities having jurisdiction over service. Record locations of maintained, re-routed and abandoned service lines.

1.17 DOCUMENTS REQUIRED

- .1 Maintain at job site, one copy each of the
 following:
 - .1 Contract Drawings
 - .2 Specifications
 - .3 Addenda
 - .4 Reviewed Shop Drawings
 - .5 List of outstanding shop drawings
 - .6 Change Orders
 - .7 Other modifications to Contract
 - .8 Field Test Reports
 - .9 Copy of Approved Work Schedule
 - .10 Site specific Health and Safety Plan and other safety related documents
 - .11 Other documents as stipulated elsewhere in the Contract Documents.

1.18 PERMITS

- .1 Obtain and pay for all permits, certificates and licenses as required by Municipal, Provincial, Federal and other Authorities.
- .2 Provide appropriate notifications of project to municipal and provincial inspection authorities.

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 9
Project Number 721935		2019-03-03

- .3 Obtain compliance certificates as prescribed by legislative and regulatory provisions of municipal, provincial and federal authorities as applicable to the performance of work.
- .4 Submit to Departmental Representative, copy of application submissions and approval documents received for above referenced authorities.
- .5 Submit to Departmental Representative, copy of quarry permit, if applicable, prior to start of quarry operations.
- .6 Comply with all requirements, recommendations and advice by all regulatory authorities unless otherwise agreed in writing by Departmental Representative. Make requests for such deviations to these requirements sufficiently in advance of related work.

1.19 CUTTING, FITTING AND PATCHING

- .1 Execute cutting, including excavation, fitting and patching required to make work fit properly.
- .2 Where new work connects with existing and where existing work is altered, cut, patch and make good to match existing work. This includes patching of openings in existing work resulting from removal of existing services.
- .3 Do not cut, bore, or sleeve load-bearing members.
- .4 Make cuts with clean, true, smooth edges.
 Make patches inconspicuous in final
 assembly.

1.20 EXISTING SUB-

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction		Page 10
Hermitage, NL Project Number 721935		2019-03-03

SURFACE CONDITIONS

sub-surface conditions may be available by contacting the Departmental Representative.

.2 Contractors are cautioned that any previous investigations that may be available for review, were intended to provide general site information only. Any interpolation and/or assumptions made relative to any previous investigations is the Contractor's responsibility.

1.21 LOCATION OF EQUIPMENT

- .1 Location of work shown or specified shall be considered as approximate. Actual location shall be as required to suit conditions at time of installation and as is reasonable. Obtain approval of Departmental Representative.
- .2 Locate equipment, fixtures and distribution systems to provide minimum interference and maximum usable space and in accordance with manufacturer's recommendations for safety, access and maintenance.
- .3 Inform Departmental Representative when impending installation conflicts with other new or existing components. Follow directives for actual location.
- .4 Submit field drawings to indicate relative position of various services and equipment when required by Departmental Representative.

1.22 FISH HABITAT

.1 This work is being conducted in an area where fish habitat may be affected.

Perform work to conform with rules and regulations governing fish habitat and in accordance with authorization for work or undertakings affecting fish habitat.

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction Hermitage, NL		Page 11
Project Number 721935		2019-03-03

.2 Contact the local Department of Fisheries and Oceans detachment at least 48 hours in advance of starting any work on site.

1.23 NOTICE TO SHIPPING/MARINERS

- .1 Notify the Marine Communications and Traffic Services' Centre, of Fisheries and Oceans Canada, ten (10) days prior to commencement and upon completion of the work, in order to allow for the issuance of Notices to Shipping/Mariners.
- .2 During construction any vessels or barges utilized must be marked in accordance with the provisions of the Canada Shipping Act Collision Regulations.

1.24 ACCEPTANCE

.1 Prior to the issuance of the Certificate of Substantial Performance, in company with Departmental Representative, make a check of all work. Correct all discrepancies before final inspection and acceptance.

1.25 WORKS COORDINATION

- .1 Responsible for coordinating the work of the various trades, where the work of such trades interfaces with each other.
- .2 Convene meetings between trades whose work interfaces and ensure that they are fully aware of the areas and the extent of where interfacing is required. Provide each trade with the plans and specifications of the interfacing trade, as required, to assist them in planning and carrying out their respective work.
- .3 Canada will not be responsible for or held accountable for any extra costs incurred as a result of the failure to carry out coordination work. Disputes between the

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction		Page 12
Hermitage, NL Project Number 721935		2019-03-03

various trades as a result of their not being informed of the areas and extent of interface work shall be the sole responsibility of the General Contractor and shall be resolved at no extra cost to Canada.

1.26 CONTRACTOR'S USE OF SITE

- .1 Construction operations, including storage of materials for this contract, not to interfere with the existing operations at this harbour facility.
- .2 Responsible for arranging the storage of materials on or off site, and any materials stored at the site which interfere with any of the day to day activities at or near the site will be moved promptly at the Contractor's expense, upon request by Departmental Representative.
- .3 Contractor will take adequate precautions to protect existing concrete decks and asphalt when operating tracked equipment.
- .4 Exercise care so as not to obstruct or damage public or private property in the area.
- .5 At completion of work, restore area to its original condition. Damage to ground and property will be repaired by Contractor. Remove all construction materials, residue, excess, etc., and leave site in a condition acceptable to Departmental Representative.

1.27 WORK COMMENCEMENT

.1 Mobilization to project site is to commence immediately after acceptance of bid and submission of Site Specific Safety Plan and insurance documentation, unless otherwise agreed by Departmental Representative.

	GENERAL INSTRUCTIONS	Section 01 10 10
Slipway Reconstruction		Page 13
Hermitage, NL Project Number 721935		2019-03-03

- .2 Project work on site is to commence as soon as possible, with a continuous reasonable work force, unless otherwise agreed by Departmental Representative.
- .3 Weather conditions, short construction season, delivery challenges and the location of the work site may require the use of longer working days and additional work force to complete the project within the specified completion time.
- .4 Make every effort to ensure that sufficient material and equipment is delivered to site at the earliest possible date after acceptance of bid and replenished as required.

1.28 FACILITY SMOKING ENVIRONMENT

.1 Comply with smoking restrictions.

	PAYMENT PROCEDURES FOR	Section 01 29 83
	TESTING LABORATORY SERVICES	
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 SECTION INCLUDES

.1 Inspecting and testing by inspecting firms or testing laboratories designated by Departmental Representative.

1.2 RELATED REQUIREMENTS SPECIFIED ELSEWHERE

.1 Particular requirements for inspection and testing to be carried out by testing laboratory designated by Departmental Representative are specified under various sections.

1.3 APPOINTMENT AND PAYMENT

- .1 Departmental Representative will appoint and pay for services of testing laboratory except for the following:
 - .1 Inspection and testing required by laws, ordinances, rules, regulations or orders of public authorities.
 - .2 Inspection and testing performed exclusively for Contractor's convenience.
 - .3 Mill tests and certificates of compliance.
 - .4 Tests specified to be carried out by Contractor under the supervision of Departmental Representative.
 - .5 Tests requested by Departmental Representative to confirm material specifications when the applicable manufacturer's documentation or test results are unavailable.
 - .6 Additional tests specified in the following paragraph.
- .2 Where tests or inspections by designated testing laboratory reveal Work not in accordance with contract requirements, pay costs for additional tests or inspections as required by Departmental Representative to verify acceptability of corrected work.

1.4 CONTRACTOR'S

.1 Provide labour, equipment and facilities

	PAYMENT PROCEDURES FOR	Section 01 29 83
	TESTING LABORATORY SERVICES	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

RESPONSIBILITIES

to:

- .1 Provide access to Work to be inspected and tested.
- .2 Facilitate inspections and tests.
- .3 Make good Work disturbed by inspection and test.
- .4 Provide storage on site for laboratory's exclusive use to store equipment and cure test samples.
- .2 Notify Departmental Representative sufficiently in advance of operations to allow for assignment of laboratory personnel and scheduling of test.
- .3 Where materials are specified to be tested, deliver representative samples in required quantity to testing laboratory.
- .4 Pay costs for uncovering and making good Work that is covered before required inspection or testing is completed and approved by Departmental Representative.

PART 2 - PRODUCTS

2.1 NOT USED .1 Not Used.

PART 3 - EXECUTION

3.1 NOT USED .1 Not Used.

	SUBMITTAL	PROCEDURES	Section 0	1 33	00
Slipway Reconstruction			Page 1		
Hermitage, NL Project Number 721935			2019-03-0	13	

PART 1 - GENERAL

1.1 SECTION INCLUDES

- .1 Shop drawings and product data.
- .2 Samples.
- .3 Certificates.

1.2 SUBMITTAL GENERAL REQUIREMENTS

- .1 Submit to Departmental Representative for review submittals listed, including shop drawings, samples, certificates and other data, as specified in other sections of the Specifications.
- .2 Submit with reasonable promptness and in orderly sequence so as to allow for Departmental Representative's review and not cause delay in Work. Failure to submit in ample time will not be considered sufficient reason for an extension of Contract time and no claim for extension by reason of such default will be allowed.
- .3 Do not proceed with work until relevant submissions are reviewed by Departmental Representative.
- .4 Present shop drawings, product data, samples and mock-ups in SI Metric units.
- .5 Where items or information is not produced in SI Metric units, provide soft converted values.
- .6 Review submittals prior to submission to Departmental Representative. Ensure during review that necessary requirements have been determined and verified, required field measurements or data have been taken, and that each submittal has been checked and co-ordinated with requirements of Work and Contract Documents.

	SUBMITTAL	PROCEDURES	Section	01	33	00
Slipway Reconstruction			Page 2			
Hermitage, NL						
Project Number 721935			2019-03	-03		

- .1 Submittals not stamped, signed, dated and identified as to specific project will be returned unexamined by Departmental Representative and considered rejected.
- .7 Notify Departmental Representative, in writing at time of submission, identifying deviations from requirements of Contract Documents stating reasons for deviations.
- .8 Verify field measurements and affected adjacent work and coordinate.
- .9 Contractor's responsibility for errors and omissions in submission is not relieved by Departmental Representative's review of submittals.
- .10 Contractor's responsibility for deviations in submission from requirements of Contract Documents is not relieved by Departmental Representative's review.
- .11 Submittal format: paper originals, or alternatively clear and fully legible photocopies of originals. Facsimiles are not acceptable, except in special circumstances pre-approved by Departmental Representative. Poorly printed non-legible photocopies or facsimiles will not be accepted and be returned for resubmission.
- .12 Make changes or revision to submissions which Departmental Representative may require, consistent with Contract Documents and resubmit as directed by Departmental Representative. When resubmitting, notify Departmental Representative in writing of any revisions other than those requested.
- .13 Keep one reviewed copy of each submittal document on site for duration of Work.
- .1 The term "shop drawings" means drawings, diagrams, illustrations, schedules,

1.3 SHOP DRAWINGS AND PRODUCT DATA

	SUBMITTAL PROCEDU	JRES	Section (01 3	3 00
Slipway Reconstruction			Page 3		
Hermitage, NL Project Number 721935			2019-03-0	03	

performance charts, product data, brochures and other data which are to be provided by Contractor to illustrate details of a portion of Work.

- .2 Number of Shop Drawings: submit sufficient copies of shop drawings which are required by the General Contractor and sub-contractors plus 2 copies which will be retained by Departmental Representative. Ensure sufficient numbers are submitted to enable one complete set to be included in each of the maintenance manuals specified, if applicable.
- .3 Shop Drawings Content and Format:
 - .1 Indicate materials, methods of construction and attachment or anchorage, erection diagrams, connections, explanatory notes and other information necessary for completion of Work. Where items or equipment attach or connect to other items or equipment, confirm that all interrelated work have been coordinated, regardless of section or trade from which the adjacent work is being supplied and installed.
 - .2 Shop Drawings Format:
 - .1 Opaque white prints or photocopies of original drawings or standard drawings modified to clearly illustrate work specific to project requirements. Maximum sheet size to be 1000 x 707 mm.
 - .2 Product Data from manufacturer's standard catalogue sheets, brochures, literature, performance charts and diagrams, used to illustrate standard manufactured products, to be original full colour brochures, clearly marked indicating applicable data and deleting information not applicable to project.
 - .3 Non or poorly legible drawings, photocopies or facsimiles will not be accepted and returned not reviewed.
 - .3 Supplement manufacturer's standard

	SUBMITTAL PRO	OCEDURES	Section	01 3	33	00
Slipway Reconstruction			Page 4			
Hermitage, NL Project Number 721935			2019-03-	03		

drawings and literature with additional information to provide details applicable to project.

- .4 Delete information not applicable to project on all submittals.
- .4 Allow 10 calendar days for Departmental Representative's review of each submission.
- .5 Adjustments or corrections made on shop drawings by Departmental Representative are not intended to change Contract Price. If adjustments affect value of Work, advise Departmental Representative in writing prior to proceeding with Work.
- Representative, no errors or omissions are discovered or if only minor corrections and comments are made, fabrication and installation may proceed upon receipt of shop drawings. If shop drawings are rejected and noted to be Resubmitted, do not proceed with that portion of work until resubmission and review of corrected shop drawings, through same submission procedures indicated above.
- .7 Accompany each submission with transmittal letter, containing:
 - .1 Date.
 - .2 Project title and project number.
 - .3 Contractor's name and address.
 - .4 Identification and quantity of each shop drawing, product data and sample.
 - .5 Other pertinent data.
- .8 Submissions shall include:
 - .1 Date and revision dates.
 - .2 Project title and project number.
 - .3 Name and address of:
 - .1 Subcontractor.
 - .2 Supplier.
 - .3 Manufacturer.
 - .4 Contractor's stamp, signed by

	SUBMITTAL PROCEDURES	Section 01 33 00
Slipway Reconstruction		Page 5
Hermitage, NL Project Number 721935		2019-03-03

Contractor's authorized representative certifying approval of submissions, verification of field measurements and compliance with Contract Documents.

- .5 Cross references to particular details of contract drawings and specifications section number for which shop drawing submission addresses.
- .6 Details of appropriate portions of Work
 as applicable:
 - .1 Fabrication.
 - .2 Layout, showing dimensions, including identified field dimensions, and clearances.
 - .3 Setting or erection details.
 - .4 Capacities.
 - .5 Performance characteristics.
 - .6 Standards.
 - .7 Operating weight.
 - .8 Wiring diagrams.
 - .9 Single line and schematic diagrams.
 - .10 Relationship to adjacent work.
- .9 After Departmental Representative's review, distribute copies.
- .10 The review of shop drawings by the Departmental Representative or their delegated representative is for sole purpose of ascertaining conformance with general concept. This review shall not mean that the Departmental Representative approves the detail design inherent in the shop drawings, responsibility for which shall remain with Contractor submitting same, and such review shall not relieve Contractor of responsibility for errors or omissions in shop drawings or of responsibility for meeting all requirements of the construction and Contract Documents. Without restricting generality of foregoing, Contractor is responsible for dimensions to be confirmed and correlated at job site, for information

	SUBMITTAL	PROCEDURES	Section	01	33	00
Slipway Reconstruction Hermitage, NL			Page 6			
Project Number 721935			2019-03	-03		

that pertains solely to fabrication processes or to techniques of construction and installation and for co-ordination of Work of all sub-trades.

1.4 SCHEDULES, PERMITS AND CERTIFICATES

- .1 Upon acceptance of bid, submit to
 Departmental Representative copy of Work
 Schedule and various other schedules,
 permits, certification documents and project
 management plans as specified in other
 sections of the Specifications.
- .2 Submit copy of permits, notices, compliance Certificates received by Regulatory Agencies having jurisdiction and as applicable to the Work.
- .3 Submission of above documents to be in accordance with Submittal General Requirements procedures specified in this section.

	_	SPECIAL PROCEDURES ON	Section 01 35 24
Slipway Reconstruction Hermitage, NL	FI	RE SAFETY REQUIREMENTS	Page 1
Project Number 721935			2019-03-03
1.1 SECTION INCLUDES	.1	Fire Safety Requirements.	
	. 2	Hot Work Permit.	
1.2 RELATED WORK	.1	Section 01 35 25 - Special Lockout Requirements.	Procedures on
	. 2	Section 01 35 29 - Health Requirements.	and Safety
1.3 REFERENCES	.1	Fire Protection Standards Protection Services of Hum Development Canada as foll .1 NFPA 307: Construction Protection of Marine Terming Wharves .2 NFPA 51B: Standard for During Welding, Cutting, a .3 Fire safety requirement Labour Code, previously per Resources and Skills Development	man Resources Lows: on and Fire Lnals, Piers, and or. Fire Prevention and Other Hot Work. ents of the Canada erformed by Human
1.4 DEFINITIONS	.1	Hot Work defined as: .1 Welding work2 Cutting of materials other open flame devices3 Grinding with equipments	
1.5 SUBMITTALS	.1	Submit copy of Hot Work Pro of Hot Work permit to Depa Representative for review, days after notification of	artmental within 14 calendar
	. 2	Submit in accordance with General Requirements speci 01 33 00.	
1.6 FIRE SAFETY	.1	Implement and follow fire	safety measures

	SPECIAL PROCEDURES ON	Section 01 35 24
	FIRE SAFETY REQUIREMENTS	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

REQUIREMENTS

during Work. Comply with following:

- .1 National Fire Code, latest edition.
- .2 Fire Protection Standards FCC 301 and FCC 302.
- .3 Federal and Provincial Occupational Health and Safety Acts and Regulations as specified in Section 01 35 29.
- .2 In event of conflict between any provisions of above authorities the most stringent provision will apply. Should a dispute arise in determining the most stringent requirement, Departmental Representative will advise on the course of action to be followed.

1.7 HOT WORK AUTHORIZATION

- .1 Obtain Departmental Representative's written "Authorization to Proceed" before conducting any form of Hot work on site.
- .2 To obtain authorization submit to Departmental Representative:
 - .1 Contractor's typewritten Hot Work Procedures to be followed on site as specified below.
 - .2 Description of the type and frequency of Hot Work required.
 - .3 Sample Hot Work Permit to be used.
- .3 Upon review and confirmation that effective fire safety measures will be implemented during performance of hot work, Departmental Representative will provide authorization to proceed as follows:
 - .1 Issue one written "Authorization to Proceed" covering the entire project for duration of work or;
 - .2 Separate work, or segregate certain parts of work, into individual entities. Each entity requiring a separately written "Authorization to Proceed" from Departmental Representative. Follow Departmental

	SPECIAL PROCEDURES ON	Section 01 35 24
	FIRE SAFETY REQUIREMENTS	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

Representative's directives in this regard.

- .4 Requirement for individual authorization based on:
 - .1 Nature or phasing of work;
 - .2 Risk to Facility operations;
 - .3 Quantity of various trades needing to perform hot work on project or;
 - .4 Other situation deemed necessary by Departmental Representative to ensure fire safety on premises.
- .5 Do not perform any Hot Work until receipt of Departmental Representative's written "Authorization to Proceed" for that portion of work.
- .6 In tenant occupied Facility, coordinate performance of Hot Work with Facility Manager through the Departmental Representative.

 When directed, perform Hot Work only during non-operative hours of Facility. Follow Departmental Representative's directives in this regard.

1.8 HOT WORK PROCEDURES

- .1 Develop and implement safety procedures and work practices to be followed during the performance of Hot Work.
- .2 Procedures to include:
 - .1 Requirement to perform hazard assessment of site and immediate hot work area for each hot work event in accordance with Hazard Assessment and Safety Plan requirements of Section 01 35 29.
 - .2 Use of a Hot Work Permit system for each hot work event.
 - .3 The step by step process of how to prepare and issue permit.
 - .4 Permit shall be issued by Contractor's site Superintendent, or other authorized person designated by Contractor, granting

	SPECIAL PROCEDURES ON	Section 01 35 24
	FIRE SAFETY REQUIREMENTS	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

permission to worker or subcontractor to proceed with hot work.

- .5 Provision of a designated person to carryout a Fire Safety Watch for a minimum of 60 minutes immediately upon completion of the hot work.
- .6 Compliance with fire safety codes and standards specified herein and occupational health and safety regulations specified in Section 01 35 29.
- .3 Generic procedures, if used, must be edited and supplemented with pertinent information tailored to reflect specific project conditions. Clearly label as being the Hot Work Procedures applicable to this contract.
- .4 Hot Work Procedures shall clearly establish worker instructions and allocate responsibilities of:
 - .1 Worker(s),
 - .2 Authorized person issuing the Hot Work Permit,
 - .3 Fire Safety Watcher,
 - .4 Subcontractors and Contractor.
- .5 Brief all workers and subcontractors on Hot Work Procedures and Permit system established for project. Stringently enforce compliance.

 .1 Failure to comply with the established procedures may result in the issuance of a Non-Compliance Notification at Departmental Representative's discretion with possible disciplinary measures imposed as specified in Section 01 35 29.

1.9 HOT WORK PERMIT

- .1 Hot Work Permit to include, as a minimum, the following data:
 - .1 Project name and project number.
 - .2 Building name, address and specific room or area where hot work will be performed.
 - .3 Date when permit issued.
 - .4 Description of hot work type to be

	SPECIAL PROCEDURES ON	Section 01 35 24
	FIRE SAFETY REQUIREMENTS	
Slipway Reconstruction		Page 5
Hermitage, NL		
Project Number 721935		2019-03-03

performed.

- .5 Special precautions required, including type of fire extinguisher needed.
- .6 Name and signature of person authorized to issue the permit.
- .7 Name of worker (clearly printed) to which the permit is being issued.
- .8 Time Duration that permit is valid (not to exceed 8 hours). Indicate start time and date, and completion time and date.
- .9 Worker signature with date and time upon hot work termination.
- .10 Specified time period requiring safety watch.
- .11 Name and signature of designated Fire Safety Watcher, complete with time and date when safety watch terminated, certifying that surrounding area was under continual surveillance and inspection during the full watch time period specified in Permit and commenced immediately upon completion of Hot Work.
- .2 Permit to be typewritten form. Industry Standard forms shall only be used if all data specified above is included on form.
- .3 Each Hot Work Permit to be completed in full and signed as follows:
 - .1 Authorized person issuing Permit before hot work commences.
 - .2 Worker upon completion of Hot Work.
 - .3 Fire Safety Watcher upon termination of safety watch.
 - .4 Returned to Contractor's Site Superintendent for safe keeping.

1.10 DOCUMENTS ON SITE

- .1 Keep Hot Work Permits and Hazard assessment documentation on site for duration of Work.
- .2 Upon request, make available to Departmental Representative or to authorized safety

	SPECIAL PROCEDURES ON	Section 01 35 24
	FIRE SAFETY REQUIREMENTS	
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

representative for inspection.

		SPECIAL PROCEDURES ON	Section 01 35 25
Slipway Reconstruction	L(OCKOUT REQUIREMENTS	Dago 1
Hermitage, NL			Page 1
Project Number 721935			2019-03-03
1.1 SECTION INCLUDES	.1	Procedures to isolate and facility or other equipm source.	
1.2 RELATED WORK	.1	Section 01 35 24 - Fire S	afety Requirements.
	.2	Section 01 35 29 - Healt Requirements.	h and Safety
1.3 REFERENCES		C22.1-06 - Canadian Elect Safety Standard for Elec Installations.	
	.2	CAN/CSA C22.3 No. 1-10 -	Overhead Systems.
	.3	CAN/CSA C22.3 No. 7-10 - U	Inderground Systems.
	. 4	COSH, Canada Occupationa Regulations made under Pa Labour Code.	_
1.4 DEFINITIONS	.1	Electrical Facility: mea equipment, device, appar conductor, assembly or pused for the generation, transmission, distributicontrol, measurement or electrical energy, and tand voltage that is dang	atus, wiring, art thereof that is transformation, on, storage, utilization of hat has an amperage
	.2	Guarantee of Isolation: na competent person in cothat a particular faciliisolated.	ntrol or in charge
	.3	De-energize: in the elec a piece of equipment is is e.g. if the equipment is cannot be considered de-	olated and grounded, not grounded, it

. 4

Guarded: means that an equipment or facility

	SPECIAL PROCEDURES ON	Section 01 35 25
	LOCKOUT REQUIREMENTS	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

is covered, shielded, fenced, enclosed, inaccessible by location, or otherwise protected in a manner that, to the extent that is reasonably practicable, will prevent or reduce danger to any person who might touch or go near such item.

- .5 Isolate: means that an electrical facility, mechanical equipment or machinery is separated or disconnected from every source of electrical, mechanical, hydraulic, pneumatic or other kind of energy that is capable of making it dangerous.
- .6 Live/alive: means that an electrical facility produces, contains, stores or is electrically connected to a source of alternating or direct current of an amperage and voltage that is dangerous or contains any hydraulic, pneumatic or other kind of energy that is capable of making the facility dangerous to persons.

1.5 COMPLIANCE REQUIREMENTS

- .1 Perform lockouts in compliance with:
 - .1 Canadian Electrical Code.
 - .2 Federal and Provincial Occupational Health and Safety Acts and Regulations as specified in Section 01 35 29.
 - .3 Regulations and code of practice as applicable to mechanical equipment or other machinery being de-energized.
 - .4 Procedures specified herein.
- .2 In event of conflict between any provisions of above authorities the most stringent provision will apply. Should a dispute arise in determining the most stringent requirement, Departmental Representative will advise on the course of action to be followed.

1.6 SUBMITTALS

.1 Submit copy of proposed Lockout Procedures and sample form of lockout permit or lockout tags for review.

	SPECIAL PROCEDURES ON	Section	01	35	25
	LOCKOUT REQUIREMENTS				
Slipway Reconstruction		Page 3			
Hermitage, NL					
Project Number 721935		2019-03-	-03		

- .2 Submit documentation within 7 calendar days of acceptance of bid. Do not proceed with work until submittal has been reviewed by Departmental Representative.
- .3 Submit above documents in accordance with the submittal requirements specified in Section 01 33 00.
- .4 Resubmit Lockout Procedures with noted revisions as may result from Departmental Representative's review.

1.7 ISOLATION OF EXISTING SERVICES

- .1 Obtain Departmental Representative's written authorization prior to conducting work on an existing active, energized service or facility required as part of the work and before proceeding with lockout of such services or facility.
- .2 To obtain authorization, submit to Departmental Representative the following documentation:
 - .1 Written Request for Isolation of the service or facility and;
 - .2 Copy of Contractor's Lockout Procedures.
- .3 Make a Request for Isolation for each event, unless directed otherwise by Departmental Representative, and as follows:
 - .1 Fill-out standard forms in current use at the Facility when so directed by Departmental Representative or;
 - .2 Where no form exist at Facility, make request in writing identifying:
 - .1 Identification of system or
 equipment to be isolated, including it's
 location;
 - .2 Time duration, indicating Start time and date, and Completion time and date when isolation will be in effect;
 - .3 Voltage of service feed to system

	SPECIAL PROCEDURES ON	Section 01 35 25
	LOCKOUT REQUIREMENTS	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

or equipment being isolated;

- .4 Name of person making the request.
- .3 Document to be in typewritten format.
- .4 Do not proceed until receipt of written notification from Departmental Representative granting the Isolation Request and authorization to proceed with the isolation of designated equipment or facility. Departmental Representative may designate other individual at the Facility as the person authorized to grant the Isolation Request.
- .5 Conduct safe, orderly shut down of equipment or facilities, de-energize and isolate power and other sources of energy and lockout items in accordance with requirement of clause 1.8 below.
- .6 Plan and schedule shut down of existing services in consultation with the Departmental Representative and the Facility Manager. Minimize impact and downtime of facility operations.
- .7 Determine in advance, as much as possible, in cooperation with the Departmental Representative, the type and frequency of situations which will require a Request for Isolation. Follow Departmental Representative's directives in this regard.
- .8 Conduct hazard assessment as part of the planning process of isolating existing equipment and facilities. Hazard Assessments to conform with requirements of Health and Safety Section 01 35 29.

1.8 LOCKOUTS

.1 Isolate and lockout electrical facilities, mechanical equipment and machinery from all potential energy sources prior to starting work on such items.

	SPECIAL PROCEDURES ON	Section 01 35 25
	LOCKOUT REQUIREMENTS	
Slipway Reconstruction		Page 5
Hermitage, NL		
Project Number 721935		2019-03-03

- .2 Develop and implement lockout procedures to be followed on site as an integral part of the Work.
- .3 Use energy isolation lockout devices specifically designed and appropriate for type of facility or equipment being locked out.
- .4 Use industry standard lockout tags.
- .5 Provide appropriate safety grounding and guards as required.
- .6 Prepare Lockout Procedures in writing.

 Describe safe work practices, work functions and sequence of activities to be followed on site to safely isolate all potential energy sources and lockout/tagout facilities and equipment.
- .7 Include within procedures a system of worker request and issuance of individual lockout permit by a person, employed by Contractor, designated to be "in-charge" and being responsible for:
 - .1 Controlling issuance of permits or tags to workers.
 - .2 Determining permit duration.
 - .3 Maintaining record of permits and tags issued.
 - .4 Submitting a Request for Isolation to Departmental Representative when required in accordance with Clause 1.7 above.
 - .5 Designating a Safety Watcher, when one is required based on type of work.
 - .6 Ensuring equipment or facility has been properly isolated, providing a Guarantee of Isolation to worker(s) prior to proceeding with work.
 - .7 Collecting and safekeeping lockout tags, returned by workers, as a record of the event.

	SPECIAL PROCEDURES ON	Section 01 35 25
	LOCKOUT REQUIREMENTS	
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

- .8 Clearly establish, describe and allocate, within procedures, the responsibilities of:
 - .1 Workers.
 - .2 Designated person controlling issuance of lockout tags/permits.
 - .3 Safety Watcher.
 - .4 Subcontractors and General Contractor.
- .9 Procedures shall meet the requirements of Codes and Regulations specified in clause 1.5 above.
- .10 Generic procedures, if used, must be edited, supplemented with pertinent information and tailored to reflect specific project conditions. Clearly label as being the procedures applicable to this contract.

 .1 Incorporate site specific rules and procedures established by Facility Manager and in force at site. Obtain such procedures through Departmental Representative.
- .11 Procedures to be in typewritten format.
- .12 Submit copy of Lockout Procedures to
 Departmental Representative, in accordance
 with submittal requirements of clause 1.6
 herein, prior to commencement of work.

1.9 CONFORMANCE

- .1 Ensure that lockout procedures, as established for project on site, are stringently followed. Enforce use and compliance by all workers.
- .2 Brief all persons working on electrical facilities, mechanical and other equipment fed by an energy source on requirements of this section.
- .3 Failure to perform lockouts in accordance with regulatory requirements or follow procedures specified herein may result in the issuance of a Non-Compliance Notification at Departmental Representative's discretion

	SPECIAL PROCEDURES ON LOCKOUT REQUIREMENTS	Section 01 35 25
Slipway Reconstruction		Page 7
Hermitage, NL		
Project Number 721935		2019-03-03

with possible disciplinary measures imposed as specified in Section 01 35 29.

1.10 DOCUMENTS ON SITE

- .1 Post Lockout Procedures on site in common location for viewing by workers.
- .2 Keep copies of Request for Isolation submitted to Departmental Representative and lockout permits or tags issued to workers during the course of work for full project duration.
- .3 Upon request, make such data available to Departmental Representative or to authorized safety representative for inspection.

		HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction Hermitage, NL			Page 1
Project Number 721935			2019-03-03
1.1 RELATED WORK	.1	Section 01 35 24 - Special Fire Safety Requirements.	Procedures on
	.2	Section 01 35 25 - Special Lockout Requirements.	Procedures on
1.2 DEFINITIONS	.1	COSH: Canada Occupational Safety Regulations made unthe Canada Labour Code.	
		Competent Person: means a 1 Qualified by virtue of persons and experiors assigned work in will ensure the health and persons in the workplace, 2 Knowledgeable about the proccupational health and some and regulations that applicand; 3 Knowledgeable about potential danger to health or safet with the Work.	ersonal experience to a manner that ad safety of and; erovisions of safety statutes ey to the Work
	.3	Medical Aid Injury: any medical medical treatment we the cost of which is covered Compensation Board of the which the injury was incurred.	as provided and ered by Workers' e province in
	. 4	PPE: personal protective	equipment.
	.5	Work Site: where used in shall mean areas, located where Work is undertaken, Contractor to perform all activities associated with performance of the Work.	l at the premises used by of the
1.3 SUBMITTALS	.1	Make submittals in accorda	nce with Section

01 33 00.

.2 Submit site-specific Health and Safety Plan prior to commencement of Work.

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

- .1 Submit within 10 work days of notification of Bid Acceptance. Provide 3 copies.
- .2 Departmental Representative will review Health and Safety Plan and provide comments.
- .3 Revise the Plan as appropriate and resubmit within 5 work days after receipt of comments.
- .4 Departmental Representative's review and comments made of the Plan shall not be construed as an endorsement, approval or implied warranty of any kind by Canada and does not reduce Contractor's overall responsibility for Occupational Health and Safety of the Work.
- .5 Submit revisions and updates made to the Plan during the course of Work.
- .3 Submit name of designated Health & Safety Site Representative and support documentation specified in the Safety Plan.
- .4 Submit building permit, compliance certificates and other permits obtained.
- .5 Submit copy of Letter in Good Standing from Provincial Workers Compensation or other department of labour organization.
 - .1 Submit update of Letter of Good Standing whenever expiration date occurs during the period of Work.
- .6 Submit copies of reports or directions issued by Federal, Provincial and Territorial health and safety inspectors.
- .7 Submit copies of incident reports.
- .8 Submit WHMIS MSDS Material Safety Data Sheets.

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

1.4 COMPLIANCE REQUIREMENTS

- .1 Comply with the Occupational Health and Safety Act for the Province of Newfoundland and Labrador, and the Occupational Health and Safety Regulations made pursuant to the Act.
- .2 Comply with Canada Labour Code Part II, (entitled Occupational Health and Safety) and the Canada Occupational Health and Safety Regulations (COSH) as well as any other regulations made pursuant to the Act.
 - .1 The Canada Labour Code can be viewed at: www.http://laws.justice.gc.ca
 - .2 COSH can be viewed at:
 www.http://laws.justice.gc.ca
 - .3 A copy may be obtained at: Canadian Government Publishing Public Service and Procurement Canada Ottawa, Ontario, K1A 0S9
- .3 Observe construction safety measures of:
 - .1 Part 8 of National Building Code.
 - .2 Municipal by-laws and ordinances.
- .4 In case of conflict or discrepancy between any specified requirements, the more stringent shall apply.
- .6 Maintain Workers Compensation Coverage in good standing for duration of Contract.

 Provide proof of clearance through submission of Letter of Good Standing.
 - .7 Medical Surveillance: Where prescribed by legislation or regulation, obtain and maintain worker medical surveillance documentation.

1.5 RESPONSIBILITY

.1 Be responsible for health and safety of persons on site, safety of property and for protection of persons and environment adjacent to the site to extent that they may be affected by conduct of Work.

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

.2 Comply with and enforce compliance by all workers, sub-contractors and other persons granted access to work site with safety requirements of Contract Documents, applicable Federal, Provincial, and local by-laws, regulations, and ordinances, and with site specific Health and Safety Plan.

1.6 SITE CONTROL AND ACCESS

- .1 Control the Work and entry points to Work Site. Approve and grant access only to workers and authorized persons.

 Immediately stop and remove non-authorized persons.
 - .1 Departmental Representative will provide names of those persons authorized by Departmental Representative to enter onto Work Site and will ensure that such authorized persons have the required knowledge and training on Health and Safety pertinent to their reason for being at the site, however, Contractor remains responsible for the health and safety of authorized persons while at the Work Site.
- .2 Isolate Work Site from other areas of the premises by use of appropriate means.
 - .1 Erect fences, hoarding, barricades and temporary lighting as required to effectively delineate the Work Site, stop non-authorized entry, and to protect pedestrians and vehicular traffic around and adjacent to the Work and create a safe environment.
 - .2 Post signage at entry points and other strategic locations indicating restricted access and conditions for access.
 - .3 Use professionally made signs with bilingual message in the 2 official languages or international known graphic symbols.
- .3 Provide safety orientation session to

	HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03

persons granted access to Work Site. Advise of hazards and safety rules to be observed while on site.

- .4 Ensure persons granted site access wear appropriate PPE. Supply PPE to inspection authorities who require access to conduct tests or perform inspections.
- .5 Secure Work Site against entry when inactive or unoccupied and to protect persons against harm. Provide security guard where adequate protection cannot be achieved by other means.

1.7 PROTECTION

- .1 Give precedence to safety and health of persons and protection of environment over cost and schedule considerations for Work.
- .2 Should unforeseen or peculiar safety related hazard or condition become evident during performance of Work, immediately take measures to rectify situation and prevent damage or harm. Advise Departmental Representative verbally and in writing.

1.8 FILING OF NOTICE

- .1 File Notice of Project with pertinent provincial health and safety authorities prior to beginning of Work.
 - .1 Departmental Representative will assist in locating address if needed.

1.9 PERMITS

- .1 Post permits, licenses and compliance certificates, specified in section 01 10 10, at Work Site.
- .2 Where a particular permit or compliance certificate cannot be obtained, notify Departmental Representative in writing and obtain approval to proceed before carrying out applicable portion of work.

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

1.10 HAZARD ASSESSMENTS

- .1 Perform site specific health and safety hazard assessment of the Work and its site.
- .2 Carryout initial assessment prior to commencement of Work with further assessments as needed during progress of work, including when new trades and subcontractors arrive on site.
- .3 Record results and address in Health and Safety Plan.
- .4 Keep documentation on site for entire duration of the Work.

1.11 PROJECT/SITE CONDITIONS

- .1 The following are known or potential project related safety hazards at site:
 - .1 Working in close proximity of water.
 - .2 Use of water crafts and floating platforms.
 - .3 Wet and slippery conditions.
 - .4 Inclement weather.
 - .5 Potential structural weakness of existing structures.
 - .6 Heavy equipment activity in the area.
 - .7 Heavy lifting.
 - .8 Working at heights.
 - .9 Cutting tools and other construction power tools.
 - .10 Overhead power/utility lines.
 - .11 Risk of electric shock.
 - .12 Vehicular and pedestrian traffic.
 - .13 Confined spaces.
- .2 Above items shall not be construed as being complete and inclusive of potential health, and safety hazards encountered during work.

		HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction Hermitage, NL			Page 7
Project Number 721935			2019-03-03
	.3	Include above items into process.	hazard assessment
	.4	MSDS Data sheets of pertiand controlled products so be obtained from Department Representative.	stored on site can
1.12 MEETINGS	.1 Attend pre-construction health and smeeting, convened and chaired by Departmental Representative, prior to commencement of Work, at time, date location determined by Departmental Representative. Ensure attendance of .1 Superintendent of Work2 Designated Health & Safety Site Representative3 Subcontractors.		aired by ve, prior to time, date and epartmental tendance of:
	.2	Conduct regularly schedul safety meetings during the conformance with Occupations.	ne Work in
	.3	Keep documents on site.	
1.13 HEALTH AND SAFETY PLAN	.1	Prior to commencement of written Health and Safety the work. Implement, mair Plan for entire duration final demobilization from	Plan specific to stain, and enforce of Work and until

- .2 Health and Safety Plan shall include the following components:
 - .1 List of health risks and safety hazards identified by hazard assessment.
 - .2 Control measures used to mitigate risks and hazards identified.
 - .3 On-site Contingency and Emergency Response Plan as specified below.
 - .4 On-site Communication Plan as specified below.
 - .5 Name of Contractor's designated Health

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 8
Hermitage, NL		
Project Number 721935		2019-03-03

- & Safety Site Representative and information showing proof of his/her competence and reporting relationship in Contractor's company.
- .6 Names, competence and reporting relationship of other supervisory personnel used in the Work for occupational health and safety purposes.
- .3 On-site Contingency and Emergency Response Plan shall include:
 - .1 Operational procedures, evacuation measures and communication process to be implemented in the event of an emergency.
 - .2 Evacuation Plan: site and floor plan layouts showing escape routes, marshaling areas. Details on alarm notification methods, fire drills, location of fire fighting equipment and other related data.
 - .3 Name, duties and responsibilities of persons designated as Emergency Warden(s) and deputies.
 - .4 Emergency Contacts: name and telephone number of officials from:
 - .1 General Contractor and subcontractors.
 - .2 Pertinent Federal and Provincial Departments and Authorities having jurisdiction.
 - .3 Local emergency resource organizations.
 - .5 Harmonize Plan with Facility's
 Emergency Response and Evacuation Plan.
 Departmental Representative will
 provide pertinent data including name
 of Facility Management contacts.
- .4 On-site Communication Plan:
 - .1 Procedures for sharing of work related safety information to workers and subcontractors, including emergency

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 9
Hermitage, NL		
Project Number 721935		2019-03-03

and evacuation measures.

- .2 List of critical work activities to be communicated with Facility Manager which have a risk of endangering health and safety of Facility users.
- .5 Address all activities of the Work including those of subcontractors.
- .6 Review Health and Safety Plan regularly during the Work. Update as conditions warrant to address emerging risks and hazards, such as whenever new trade or subcontractor arrive at Work Site.
- .7 Departmental Representative will respond in writing, where deficiencies or concerns are noted and may request resubmission of the Plan with correction of deficiencies or concerns.
- .8 Post copy of the Plan, and updates, prominently on Work Site.

1.14 SAFETY SUPERVISION

- .1 Employ Health & Safety Site Representative responsible for daily supervision of health and safety of the Work.
- .2 Health & Safety Site Representative may be the Superintendent of the Work or other person designated by Contractor and shall be assigned the responsibility and authority to:
 - .1 Implement, monitor and enforce daily compliance with health and safety requirements of the Work
 - .2 Monitor and enforce Contractor's site-specific Health and Safety Plan.
 - .3 Conduct site safety orientation session to persons granted access to Work Site.
 - .4 Ensure that persons allowed site access are knowledgeable and trained in health and safety pertinent to their activities at the

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 10
Hermitage, NL		
Project Number 721935		2019-03-03

- site or are escorted by a competent person while on the Work Site.
- .5 Stop the Work as deemed necessary for reasons of health and safety.
- .3 Health & Safety Site Representative must:
 - .1 Be qualified and competent person in occupational health and safety.
 - .2 Have site-related working experience specific to activities of the Work.
 - .3 Be on Work Site at all times during execution of the Work.
 - .4 All supervisory personnel assigned to the Work shall also be competent persons.
 - .5 Inspections:
 - .1 Conduct regularly scheduled safety inspections of the Work on a minimum bi-weekly basis. Record deficiencies and remedial action taken.
 - .2 Conduct Formal Inspections on a minimum monthly basis. Use standardized safety inspection forms. Distribute to subcontractors.
 - .3 Follow-up and ensure corrective measures are taken.
 - .6 Cooperate with Facility's Occupational Health and Safety representative should one be designated by Departmental Representative.
 - .7 Keep inspection reports and supervision related documentation on site.

1.15 TRAINING

- .1 Use only skilled workers on Work Site who are effectively trained in occupational health and safety procedures and practices pertinent to their assigned task.
- .2 Maintain employee records and evidence of training received. Make data available to Departmental Representative upon request.

	HEALTH AND SAFETY	Section 01 35 29
	REQUIREMENTS	
Slipway Reconstruction		Page 11
Hermitage, NL		
Project Number 721935		2019-03-03

.3 When unforeseen or peculiar safety-related hazard, or condition occur during performance of Work, follow procedures in place for Employee's Right to Refuse Work in accordance with Acts and Regulations of Province having jurisdiction and advise Departmental Representative verbally and in writing.

1.16 MINIMUM SITE SAFETY RULES

- .1 Notwithstanding requirement to abide by federal and provincial health and safety regulations; ensure the following minimum safety rules are obeyed by persons granted access to Work Site:
 - .1 Wear appropriate PPE pertinent to the Work or assigned task; minimum being hard hat, safety footwear, safety glasses and hearing protection.
 - .2 Immediately report unsafe condition at site, near-miss accident, injury and damage.
 - .3 Maintain site and storage areas in a tidy condition free of hazards causing injury.
 - .4 Obey warning signs and safety tags.
- .2 Brief persons of disciplinary protocols to be taken for non compliance. Post rules on site.

1.17 COORECTION OF NON-COMPLIANCE

- .1 Immediately address health and safety non-compliance issues identified by authority having jurisdiction or by Departmental Representative.
- .2 Provide Departmental Representative with written report of action taken to correct non-compliance of health and safety issues identified.
- .3 Departmental Representative will stop Work if non-compliance of health and safety

		HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction Hermitage, NL			Page 12
Project Number 721935			2019-03-03
		regulations is not corre	ected in a timely
1.18 INCIDENT . REPORTING .	. 1	Investigate and report to incidents to Departmental .1 Incidents requiring no Provincial Department Safety and Health, Wo Board or to other reg. 2 Medical aid injuries3 Property damage in expectage statement of the sulting in an operate of the second	Representative: cotification to cof Occupational orkers Compensation culatory Agency. cess of dity operations ctional lost to a
	. 2	Submit report in writing	·
1.19 HAZARDOUS . PRODUCTS	.1	Comply with requirements Hazardous Materials Info	-
	. 2	Keep MSDS data sheets for delivered to site1 Post on site2 Submit copy to Depart	_
1.20 BLASTING	.1	Representative. Blasting or other use of permitted on site withou written permission and i Departmental Representat	t prior receipt of nstructions from
	. 2	Do blasting operations i local and provincial cod	
1.21 POWDER . ACTUATED DEVICES	.1	Use powder actuated fast after receipt of written Departmental Representat	permission from

		HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction Hermitage, NL		11.12011.11.11.11	Page 13
Project Number 721935			2019-03-03
1.22 CONFINED . SPACES	. 1	Abide by occupational he regulations regarding wo spaces.	
	. 2	Obtain an Entry Permit i Part XI of the Canada Oc and Safety Regulations f existing identified conf at the Facility or premi .1 Obtain permit from Fac .2 Keep copy of permit is .3 Safety for Inspectors: .1 Provide PPE and tr Departmental Repre other persons who confined space to inspections2 Be responsible for equipment and safe during their entry the confined space	cupational Health or entry into an ined space located ses of Work. ility Manager sued. aining to sentative and require entry into perform efficacy of ty of persons and occupancy in
1.23 SITE RECORDS .	. 1	Maintain on Work Site corelated documentation an stipulated to be produce with Acts and Regulation having jurisdiction and specified herein.	d reports d in compliance s of authorities
-	. 2	Upon request, make avail Departmental Representat Safety Officer for inspe	ive or authorized
1.24 POSTING OF . DOCUMENTS .	.1	Ensure applicable items, and orders are posted in location on Work Site in Acts and Regulations of jurisdiction.	conspicuous accordance with
	. 2	Post other documents as including: .1 Site specific Health .2 WHMIS data sheets.	

	HEALTH AND SAFETY REQUIREMENTS	Section 01 35 29
Slipway Reconstruction	~	Page 14
Hermitage, NL Project Number 721935		2019-03-03

1.25 DIVING OPERATIONS

- .1 All diving work to comply fully with the requirements of CSA Z275.2-04 (R2010), "Occupational Safety Code for Diving Operations", CSA Z275.4-02 (C2010), "Competency Standards for Diving Operations "and CSA Z180.1-00 (R2010), "Compressed Breathing Air and Systems."
- .2 Dive personnel must meet the minimum competency requirements of the CSA Z275.4-02 (C2010) and all divers must possess a valid Category 1 Diving Certificate or an Unrestricted Surface-supplied Certificate.
- .3 Diving in free-swim mode is not permitted at the work site.
- .4 Divers must have a current(less than one year) validated medical examination certificate(s) from a licensed Diving Physician in Newfoundland and Labrador who is knowledgeable and competent in diving and hyperbaric medicine, for all dives.

		ENVIRONMENTAL PROCEDURES	Section 01 35 43
Slipway Reconstruction Hermitage, NL			Page 1
Project Number 721935			2019-03-03
1.1 RELATED WORK	.1	Section 01 74 21 - Constr Waste Management and Disp	·
1.2 DEFINITIONS	.1	Hazardous Material: Produce organism that is used for purpose; and that is either or a material that may can to the environment or adverse of persons, animals, or preleased into the environment.	r its original ner dangerous goods nuse adverse impact rsely affect health plant life when
1.3 FIRES	.1	Fires and burning of rubbe permitted.	oish on site not
1.4 DISPOSAL OF WASTES AND HAZARDOUS MATERIALS	.1	Do not bury rubbish and wasite. Dispose at approved specified in Section 01 7	l landfill sites as
	.2	Do not dispose of hazardou materials, such as minera thinners, oil or fuel int or sanitary sewers or was	al spirits, paints, to waterways, storm
	.3	Store, handle and dispose materials and hazardous with applicable federal arregulations, codes and gu	aste in accordance nd provincial laws,
	. 4	Dispose of construction we demolition debris, result approved landfill sites of disposal in strict accordate and municipal rules and regout and prevent improper banned from landfills. An encountered is to be disputed by the Provincially approved such as Norris Arm or Robi all weigh bill/tipping slandfills. Representative).	cing from work, at only. Carryout such nce with provincial gulations. Separate disposal of items by creosote timber cosed of at one of lined waste sites, n Hood Bay (provide)

Establish methods and undertake construction

.5

	ENVIRONMENTAL PROCEDURES	Section 01 35 43
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03

practices which will minimize waste and optimize use of construction materials. Separate at source all construction waste materials, demolition debris and product packaging and delivery containers into various waste categories in order to maximize recycling abilities of various materials and avoid disposal of debris at landfill site(s) in a "mixed state". Where recycling firms, specializing in recycling of specific materials exist, transport such materials to the recycling facility and avoid disposal at landfill sites.

.6 Communicate with landfill operator prior to commencement of work, to determine what specific construction, demolition and renovation waste materials have been banned from disposal at the landfill and at transfer stations.

1.5 DRAINAGE

- .1 Provide temporary drainage and pumping as necessary to keep excavations and site free from water.
- .2 Do not pump water containing suspended materials into waterways, sewer or drainage systems.
- .3 Control disposal or runoff of water containing suspended materials or other harmful substances in accordance with governing regulations and requirements.
- .4 Pumped water must meet applicable federal, provincial, and municipal standards before it can be discharged to a surface water body. If regulatory guidelines exceedences are noted, the Departmental Representative has the right to issue stop pumping instructions to the Contractor. Contractor will not be compensated for any delays associated with retrofitting equipment to meet guidelines.

		ENVIRONMENTAL PROCEDURES Section 01 35 43
Slipway Reconstruction Hermitage, NL		Page 3
Project Number 721935		2019-03-03
	_	
	.5	Provide control devices such as filter fabrics, sediment traps and settling ponds to control drainage and prevent erosion of adjacent lands. Maintain in good order for duration of work.
1.6 PERMITS	.1	All guidelines and instructions stated on permits must be strictly adhered to.
1.7 WORK ADJACENT TO WATERWAYS	.1	Do not operate construction equipment in waterways.
	. 2	Do not use waterway beds for borrow material.
	.3	Do not dump excavated fill, waste material or debris in waterways.
	. 4	At borrow sites, design and construct temporary crossings to minimize erosion to waterways in strict conformance with provincial and federal environmental regulations.
	. 5	Do not skid logs or construction materials across waterways.
	.6	Avoid indicated spawning beds when constructing temporary crossings of waterways.
	. 7	Do not blast within 100 m of spawning beds.
	.8	Do not refuel any type of equipment within 100 m of a water body. Maintain equipment in good working condition with no fluid leaks, loose hoses or fittings.
1.8 POLLUTION CONTROL	.1	Maintain temporary erosion and pollution control features installed under this contract.
	_	

. 2

Control emissions from equipment and plant to local authorities emission requirements.

	ENVIRONMENTAL PROCEDURES	Section 01 35 43
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

- .3 Prevent sandblasting and other extraneous materials from contaminating air beyond application area, by providing temporary enclosures.
- .4 Cover or wet down dry materials and rubbish to prevent blowing dust and debris. Provide dust control for temporary roads and around entire construction site.
- .5 Maintain inventory of hazardous materials and hazardous waste stored on site. List items by product name, quantity and date when storage began.
- .6 Have emergency spill response equipment and rapid clean-up kit, appropriate to work, at site. Locate adjacent to work and where hazardous materials are stored. Provide personal protective equipment as required for clean-up.
- .7 Report, to Federal and Provincial Department of the Environment, spills of petroleum and other hazardous materials as well as accidents having potential of polluting the environment. Also notify Departmental Representative and submit a written spill report to Departmental Representative within 24 hours of occurrence.
- .8 Provide a floating debris containment boom whenever any of the Contractors methods of work allow for the potential of floating debris.

1.9 WILDLIFE PROTECTION

- .1 Should nests of migratory birds in wetlands be encountered during work, immediately notify Departmental Representative for directives to be followed.
 - .1 Do not disturb nest site and neighbouring vegetation until nesting is completed.

	ENVIRONMENTAL PROCEDURES	Section 01 35 43
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03

- .2 Minimize work immediately adjacent to such areas until nesting is completed.
- .3 Protect these areas by following recommendations of Canadian Wildlife Service.

		TESTING AND QUALITY CONTROL	Section 01 45 00
Slipway Reconstruction Hermitage, NL			Page 1
Project Number 721935			2019-03-03
1.1 SECTION INCLUDES	.1	Inspection and testing, enforcements	
	. 2	Tests and mix designs.	
	.3	Mill tests.	
1.2 RELATED SECTIONS	.1	Section 01 33 00 - Submi	ttal Procedures.
-	. 2	Section 01 78 00 - Close	eout Submittals.
1.3 INSPECTION	.1	Facilitate Departmental access to Work. If part fabricated at locations construction site, make paccess to such Work when progress.	of Work is being other than reparations to allow
		Give timely notice reque Work designated for spec inspections or approvals Representative or by ins having jurisdiction.	cial tests, s by Departmental
	.3	If Contractor covers or p Work designated for spec inspections or approvals uncover Work until partic tests have been fully an completed and until such Representative gives per Pay costs to uncover and	cial tests, before such is made, cular inspections or ad satisfactorily time as Departmental rmission to proceed.
	. 4	In accordance with the G Departmental Representat part of Work to be exami suspected to be not in a Contract Documents.	ive may order any ned if Work is
1.4 INDEPENDENT	.1	<u> </u>	tive may engage and

pay for service of Independent Inspection and Testing Agencies for purpose of inspecting

INSPECTION AGENCIES

	TESTING AND QUALITY CONTROL	Section 01 45 00
Slipway Reconstruction		Page 2
Hermitage, NL Project Number 721935		2019-03-03

and testing portions of Work except for the following which remain part of Contractor's responsibilities:

- .1 Inspection and testing required by laws, ordinances, rules, regulations or orders of public authorities.
- .2 Inspection and testing performed exclusively for Contractor's convenience.
- .3 Testing, adjustment and balancing of conveying systems, mechanical and electrical equipment and systems.
- .4 Mill tests and certificates of compliance.
- .5 Tests as specified within various sections designated to be carried out by Contractor under the supervision of Departmental Representative.
- .6 Additional tests specified in Clause 1.4.2.
- .2 Where tests or inspections by designated
 Testing Agency reveal work not in accordance
 with contract requirements, Contractor shall
 pay costs for additional tests or inspections
 as Departmental Representative may require
 to verify acceptability of corrected work.
- .3 Employment of inspection and testing agencies by Departmental Representative does not relax responsibility to perform Work in accordance with Contract Documents.

1.5 ACCESS TO WORK

- .1 Furnish labour and facility to provide access to the work being inspected and tested.
- .2 Co-operate to facilitate such inspections and tests.
- .3 Make good work disturbed by inspections and tests.

1.6 PROCEDURES

.1 Notify Departmental Representative sufficiently in advance of when work is ready

	TESTING AND QUALITY	Section 01 45 00
	CONTROL	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

for tests, in order for Departmental Representative to make attendance arrangements with Testing Agency. When directed by Departmental Representative, notify such Agency directly.

- .2 Submit representative samples of materials specified to be tested. Deliver in required quantities to Testing Agency. Submit with reasonable promptness and in an orderly sequence so as not to cause delay in Work.
- .3 Provide labour and facilities to obtain and handle samples on site. Provide sufficient space on site for Testing Agency's exclusive use to store equipment and cure test samples.

1.7 REJECTED WORK

- .1 Remove and replace defective Work, whether result of poor workmanship, use of defective or damaged products and whether incorporated in Work or not, which has been identified by Departmental Representative as failing to conform to Contract Documents.
- .2 Make good damages to existing or new work, including work of other Contracts, resulting from removal or replacement of defective work.

1.8 TESTING BY CONTRACTOR

- .1 Provide all necessary instruments, equipment and qualified personnel to perform tests designated as Contractor's responsibilities herein or elsewhere in the Contract Documents.
- .2 At completion of tests, turn over 2 copies of fully documented test reports to Departmental Representative.
- .3 Submit mill test certificates and other certificates as specified in various sections.

	TESTING AND QUALITY	Section 01 45 00
	CONTROL	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

.4 Furnish test results and mix designs as specified in various sections.

		TEMPORARY FACILITIES	Section 01 50 00
Slipway Reconstruction Hermitage, NL			Page 1
Project Number 721935			2019-03-03
1.1 ACCESS		Provide and maintain adeque project site.	ate access to
	.2	Maintain access roads for contract and make good dama Contractors' use of roads.	age resulting from
1.2 CONTRACTOR'S SITE OFFICE	.1	Be responsible for and prooffice, if required, included heat, lights and telephone office as directed by Departments.	nding electricity, e. Locate site
1.3 DEPARTMENTAL REPRESENTATIVE'S SITE OFFICE	.1 Provide or construct a separate site for the use of the Departmental Representative and the Site Representative building must be in place prior commencement of work.		mental Le Representative.
		Provide heating system to inside temperature at -20° temperature.	
		The building will be approx 3600 mm. It will have a covered with a weatherproowith plywood or other approx	suitable frame f siding and lined

.4 The office will be equipped with a drafting chair and a 900 mm x 1500 mm table having a hinged, smooth wooden top suitable for drafting.

fitted with a lockset and 2 keys.

floor will be of 19 mm thick material. It will be provided with suitable window with at least 1 m^2 of glass and arranged to provide at least 0.5 m^2 of screened opening. The door will be

- .5 Install electrical lighting system to provide minimum 750 lux using surface mounted, shielded commercial fixtures with 10% upward light component.
- .6 Maintain office in clean condition.

	TEMPORARY	FACILITIES	Section 0	1 50 00
Slipway Reconstruction Hermitage, NL			Page 2	
Project Number 721935			2019-03-0	3

- .7 Arrange and pay for telephone and facsimile machine in the Departmental Representative's Office for Site Representative's exclusive use. Long distance calls or faxes placed on this phone by the Departmental Representative or the Site Representative will be paid by the Departmental Representative.
- .8 Contractor may, on approval of Departmental Representative, provide cellular or mobile phone. If approval to use cellular or mobile phone is granted, be responsible for all services, airtime, license and network access fees, and all other fees or charges required to utilize the phone as intended by the manufacturer.

1.4 SANITARY FACILITIES

- .1 Provide sanitary facilities for work force in accordance with governing regulations and ordinances.
- .2 Post notices and take such precautions as required by local health authorities. Keep area and premises in sanitary condition.

1.5 POWER

- .1 Arrange, pay for and maintain temporary electrical power supply in accordance with governing regulations and ordinances.
- .2 Supply and install all temporary facilities for power such as pole lines and underground cables to approval of local power supply authority.

1.6 WATER SUPPLY

.1 Arrange, pay for and maintain temporary water supply in accordance with governing regulations and ordinances.

1.7 CONSTRUCTION

.1 Contractor or subcontractor advertisement

	TEMPORARY	FACILITIES	Section	01 5	0 00
Slipway Reconstruction Hermitage, NL			Page 3		
Project Number 721935			2019-03-	03	

SIGN AND NOTICES

signboards are not permitted on site.

- .2 Only notices of safety or instructions are permitted on site.
- .3 Safety and Instruction Signs and Notices:
 .1 Signs and notices for safety and
 instruction shall be in both official
 languages.
- .4 Maintenance and Disposal of Site Signs:
 .1 Maintain approved signs and notices in good condition for duration of project and dispose of off site on completion of project or earlier if directed by Departmental Representative.

1.8 REMOVAL OF TEMPORARY FACILITIES

.1 Remove temporary facilities from site when directed by Departmental Representative.

	TEMPORARY BARRIE	RS AND	Section 01 56 00
	ENCLOSURES		
Slipway Reconstruction Hermitage, NL			Page 1
Project Number 721935			2019-03-03

PART 1 - GENERAL

PARI I - GENERAL		
1.1 SECTION INCLUDES	.1	Barriers.
	.2	Traffic Controls.
1.2 INSTALLATION AND REMOVAL	.1	Provide temporary controls in order to execute work expeditiously.
	.2	Remove from site all such work after use.
1.3 HOARDING	.1	Erect temporary site enclosure using new 1.2 m high snow fence wired to rolled steel "T" bar fence posts spaced at 2.4 m centres. Provide one lockable truck gate. Maintain fence in good repair.
1.4 GUARD RAILS AND BARRICADES	.1	Provide secure, rigid guard rails and barricades around open excavations.
	. 2	Provide barricades along wharf structure when wheelguard is removed.
	.3	Provide as required by governing authorities.
1.5 ACCESS TO SITE	.1	Provide and maintain access to adjacent harbour facilities.
1.6 PUBLIC TRAFFIC FLOW	.1	Provide and maintain competent signal flag operators, traffic signals, barricades and flares, lights, or lanterns as required to perform work and protect the public.
1.7 FIRE ROUTES	.1	Maintain access to property including overhead clearances for use by emergency response vehicles.

-	TEMPORARY	BARRIERS	AND	Section	01 5	56 00
	ENCLOS			20012011	-	
Slipway Reconstruction		301120		Page 2		
Hermitage, NL				rage z		
				2010 02	0.2	
Project Number 721935				2019-03-	-03	

- 1.8 PROTECTION FOR OFF-SITE AND PUBLIC PROPERTY
- .1 Protect surrounding private and public property from damage during performance of work.
- .2 Be responsible for damage incurred.

	SITE INSPECTOR'S CAMP AND BOARD	Section 01 59 20
	AND BOAND	
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

1.1 DESCRIPTION

- .1 This section specifies requirements for board, lodgings and related services to be provided by the Contractor for the Site Inspector.
- . 2 It is a requirement of this contract that the Contractor provide and pay for all board and lodgings for the Site Inspector's sole use for the duration of the project. Provide for and maintain acceptable living accommodations on site for the Site Inspector's sole use. The minimum requirement would be a hotel within 5km of the project site, or other arrangement approved by the Departmental Representative. The minimum daily allowance for the site inspector's meals (to be paid for by the contractor), is in accordance with the latest published Treasury Board guidelines for breakfast/lunch/dinner allowances (these can be found on-line at http://www.njccnm.qc.ca/directive/travel-voyage/s-td-dva3-enq.php).

1.2 BOARD AND LODGINGS

- .1 For the purpose of this contract board and lodgings shall include but not necessarily be limited to: sleeping accommodation, meals and dining facilities, washroom facilities, laundry facilities, electrical and heating service, linens and bedding, etc. and any reasonable service as directed by the Departmental Representative.
- .2 Board and lodgings must be approved by the Departmental Representative and Contractor will cooperate in providing all services required to maintain an acceptable standard of living during construction period.
- .3 The Contractor shall include all calendar

	SITE INSPECTOR'S CAMP AND BOARD	Section 01 59 20
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03
	days, including weekends	s and statutory

days, including weekends and statutory holidays in determining the cost.

1.3 REQUIREMENTS OF REGULATORY AGENCIES

- .1 Comply with any or all applicable Agencies regulation of the Province of Newfoundland and Labrador, relating to the set up, servicing and maintenance of accommodations for the Site Monitor.
- .2 Obtain and pay for any permits which may be required and comply to regulations of same.

	COMMON PRODUCT	Section 01 61 00
	REQUIREMENTS	
	REQUIREMENTS	
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

1.1 GENERAL

- .1 Use new material and equipment unless otherwise specified.
- .2 Within 7 days of written request by Departmental Representative, submit following information for any materials and products proposed for supply:
 - .1 name and address of manufacturer;
 - .2 trade name, model and catalogue number;
 - .3 performance, descriptive and test data;
 - .4 manufacturer's installation or application instructions;
 - .5 evidence of arrangements to procure.
 - .6 evidence of manufacturer delivery problems or unforseen delays.
- .3 Provide material and equipment of specified design and quality, performing to published ratings and for which replacement parts are readily available.
- .4 Use products of one manufacturer for equipment or material of same type or classification unless otherwise specified.
- .5 Permanent labels, trademarks and nameplates on products are not acceptable in prominent locations, except where required for operating instructions, or when located in mechanical or electrical rooms.

1.2 PRODUCT QUALITY AND REFERENCED STANDARDS

- .1 Contractor shall be solely responsible for submitting relevant technical data and independent test reports to confirm whether a product or system proposed for use meets contract requirements and specified standards.
- .2 Final decision as to whether a product or system meets contract requirements rest solely with the Departmental Representative in accordance with the General Conditions.

		COMMON PRODUCT	Section 01 61 00	
GI.		REQUIREMENTS	D 0	
Slipway Reconstruction Hermitage, NL			Page 2	
Project Number 721935			2019-03-03	
respect named , his			2019 03 03	
1.3 ACCEPTABLE MATERIALS AND ALTERNATIVES	.1	Acceptable Materials: We specified include trade or manufacturer's or support the material descript use one of the names list into the Work.	names or trade marks oplier's name as part tion, select and only	
		Alternative Materials: Submission of alternative materials to trade names or manufacturer's names specified must be done during the bidding period following procedures indicated in the Instructions to Bidders.		
	.3	Substitutions: After ac substitution of a specif dealt with as a change accordance with the Gene Contract.	ied material will be to the Work in	
1.4 MANUFACTURERS INSTRUCTIONS	.1	Unless otherwise specif manufacturer's latest p for materials and instal used. Do not rely on laprovided with products. instructions directly for	rinted instructions lation methods to be bels or enclosure Obtain written	
		Notify Departmental report writing of any conflict specifications and manuinstructions, so that Depresentative will desing to be followed.	between these facturers epartmental	
1.5 AVAILABILITY	.1	Immediately notify Depa Representative in writing unanticipated material manufacturer. Provide so as per Clause 1.1.2 abor	ng of unforseen or delivery problems by upport documentation	
1.6 WORKMANSHIP	.1	Ensure quality of work is executed by workers exp in respective duties fo	erienced and skilled	

employed.

COMMON PRODUCT REQUIREMENTS	Section 01 61 00
Slipway Reconstruction Hermitage, NL	Page 3
Project Number 721935	2019-03-03

- .2 Remove unsuitable or incompetent workers from site as stipulated in General Conditions.
- .3 Ensure cooperation of workers in laying out work. Maintain efficient and continuous supervision on site at all times.
- .4 Coordinate work between trades and subcontractors.
- .5 Coordinate placement of openings, sleeves and accessories.

1.7 FASTENINGS - GENERAL

- .1 Provide metal fastenings and accessories in same texture, colour and finish as base metal in which they occur. Prevent electrolytic action between dissimilar metals. Use non-corrosive fasteners, anchors and spacers for securing exterior work and in humid areas.
- .2 Space anchors within limits of load bearing or shear capacity and ensure that they provide positive permanent anchorage. Wood or organic material plugs not acceptable.
- .3 Keep exposed fastenings to minimum, space evenly and lay out neatly.
- .4 Fastenings which cause spalling or cracking of material to which anchorage is made, are not acceptable.
- .5 Do not use explosive actuated fastening devices unless approved by Departmental Representative. See Section 01 35 29 on Health and Safety in this regard.

1.8 FASTENINGS - EQUIPMENT

- .1 Use fastenings of standard commercial sizes and patterns with material and finish suitable for service.
- .2 Use heavy hexagon heads, semi-finished unless

	COMMON PRODUCT	Section 01 61 00
	REQUIREMENTS	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

otherwise specified.

- .3 Bolts may not project more than one diameter beyond nuts.
- .4 Use plain type washers on equipment, sheet metal and soft gasket lock type washers where vibrations occur and, use resilient washers with stainless steel.

1.9 STORAGE, HANDLING AND PROTECTION

- .1 Deliver, handle and store materials in manner to prevent deterioration and soiling and in accordance with manufacturer's instructions when applicable.
- .2 Store packaged or bundled materials in original and undamaged condition with manufacturer's seal and labels intact. Do not remove from packaging or bundling until required in Work. Provide additional cover where manufacturer's packaging is insufficient to provide adequate protection.
- .3 Store products subject to damage from weather in weatherproof enclosures.
- .4 Store cementitious products clear of earth or concrete floors, and away from walls.
- .5 Keep sand, when used for grout or mortar materials, clean and dry. Store sand on wooden platforms and cover with waterproof tarpaulins during inclement weather.
- .6 Store sheet materials and lumber on flat, solid supports and keep clear of ground. Slope to shed moisture.
- .7 Store and mix paints in heated and ventilated room. Remove oily rags and other combustible debris from site daily. Take every precaution necessary to prevent spontaneous combustion.
- .8 Immediately remove damaged or rejected

COMMON PRODUCT REQUIREMENTS	Section 01 61 00
Slipway Reconstruction Hermitage, NL	Page 5
Project Number 721935	2019-03-03

materials from site.

.9 Touch-up damaged factory finished surfaces to Departmental Representative's satisfaction. Use touch-up materials to match original. Do not paint over name plates.

1.10 CONSTRUCTION EQUIPMENT AND PLANT

- .1 On request, prove to the satisfaction of Departmental Representative that the construction equipment and plant are adequate to manufacture, transport, place and finish work to quality and production rates specified. If inadequate, replace or provide additional equipment or plant as directed.
- .2 Maintain construction equipment and plant in good operating order. Prevent oil and other contaminant leaks. Should any contaminant leak onto ground or into the water, take immediate and appropriate measures to contain, cleanup and dispose in an environmentally responsible manner.

	CLEANING	Section 01 74 11
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 GENERAL . 1 Conduct cleaning and disposal operations to comply with local ordinances and anti-pollution laws. . 2 Store volatile waste in covered metal containers, and remove from premises at end of each working day. Prevent accumulation of wastes which create . 3 hazardous conditions. Provide adequate ventilation during use of . 4 volatile or noxious substances. Use only cleaning materials recommended by 1.2 MATERIALS . 1 manufacturer of surface to be cleaned, and as recommended by cleaning material manufacturer. 1.3 CLEANING DURING Maintain project grounds and public . 1 CONSTRUCTION properties in a tidy condition, free from accumulations of waste material and debris. Clean areas on a daily basis. . 2 Provide on-site garbage containers for collection of waste materials and debris. Remove waste materials and debris from site . 3 on a daily basis. .1 1.4 FINAL CLEANING In preparation for acceptance of the Work

perform final cleaning.

Inspect finishes, fitments and equipment. Ensure specified workmanship and operation. Broom clean exterior paved and concrete

. 2

. 3

	CLEANING	Section 01 74 11
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03

surfaces; rake clean other surfaces of grounds.

	CONSTRUCTION/DEMOLITION WASTE MANAGEMENT AND DISPOSAL	Section 01 74 21
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03
1.1 RELATED SECTIONS	.1 Section 01 35 43 - Environ	ment Procedures.

- .2 Section 02 41 16 Sitework, Demolition and Removal.
- .3 Section 03 30 00 Cast-in-Place Concrete.
- .4 Section 06 05 73 Wood Treatment.
- .5 Section 31 53 13 Timber Cribwork.
- .6 Section 31 53 16 Structural Timber.

Note: Any reference in this section to recycling or salvage does not apply to creosote timber. All creosote timber encountered is to be disposed of at a Provincially approved lined waste site.

1.2 WASTE MANAGEMENT PLAN

- .1 Prior to commencement of work, prepare waste Management Workplan.
- .2 Workplan to include:
 - .1 Waste audit.
 - .2 Waste reduction practices.
 - .3 Material source separation process.
 - .4 Procedures for sending recyclables to recycling facilities.
 - .5 Procedures for sending non-salvageable items and waste to approved waste processing facility or landfill site.
 - .6 Training and supervising workforce on waste management at site.
- .3 Workplan to incorporate waste management requirements specified herein and in other sections of the Specifications.
- .4 Develop Workplan in collaboration with all subcontractors to ensure all waste management issues and opportunities are addressed.
- .5 Submit copy of Workplan to Departmental Representative for review and approval.
 - .1 Make revisions to Plan as directed by

	CONSTRUCTION/DEMOLITION	Section 01 74 21
	WASTE MANAGEMENT AND DISPOSAL	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

Departmental Representative.

- .6 Implement and manage all aspects of Waste Management Workplan for duration of work.
- .7 Revise Plan as work progresses addressing new opportunities for diversion of waste from landfill.

1.3 WASTE AUDIT

- .1 At project start-up, conduct waste audit of:
 .1 Projected waste resulting from product
 packaging and from material leftover after
 installation work.
- .2 Develop written list. Record type, composition and quantity of various salvageable items and waste anticipated, reasons for waste generation and operational factors which contribute to waste.

1.4 WASTE REDUCTION

- .1 Based on waste audit, develop waste reduction program.
- .2 Identify materials and equipment to be:
 - .1 Protected and turned over to Departmental Representative when indicated.
 - .2 Sent to recycling facility.
 - .3 Sent to waste processing/landfill site for their recycling effort.
 - .4 Disposed of in approved landfill site.
- .3 Reduce construction waste during installation work. Undertake practices which will minimize waste and optimize full use of new materials on site, such as:
 - .1 Use of a central cutting area to allow for easy access to off-cuts;
 - .2 Use of off-cuts for blocking and bridging elsewhere.
 - .3 Use of effective and strategically placed facilities on site for storage and staging of left-over or partially cut

	CONSTRUCTION/DEMOLITION	Section 01 74 21
	WASTE MANAGEMENT AND DISPOSAL	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

materials to allow for easy incorporation into work whenever possible avoiding unnecessary waste.

.4 Develop other strategies and innovative procedures to reduce waste such as minimizing the extent of packaging used for delivery of materials to site, etc.

1.5 MATERIAL SOURCE SEPARATION PROCESS

- .1 Develop and implement material source separation process at commencement of work as part of mobilization and waste management at site.
- .2 Provide on-site facilities to collect, handle and store anticipated quantities of reusable, salvageable and recyclable materials.
 - .1 Use suitable containers for individual collection of items based on intended purpose.
 - .2 Locate to facilitate deposit but without hindering daily operations of existing building tenants.
 - .3 Clearly mark containers and stockpiles as to purpose and use.
- .3 Perform demolition and removal of existing structure components and equipment following a systematic deconstruction process.
 - .1 Separate materials and equipment at source, carefully dismantling, labelling and stockpiling alike items for the following purposes:
 - .1 Reinstallation into the work where indicated.
 - .2 Salvaging reusable items not needed in project which Contractor may sell to other parties. Sale of such items not permitted on site.
 - .3 Sending as many items as possible to locally available recycling facility.

	CONSTRUCTION/DEMOLITION	Section 01 74 21
	WASTE MANAGEMENT AND DISPOSAL	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

- .4 Segregating remaining waste and debris into various individual waste categories for disposal in a "non-mixed state" as recommended by waste processing/landfill sites.
- .4 Isolate product packaging and delivery containers from general waste stream. Send to recycling facility or return to supplier/manufacturer.
- .5 Send leftover material resulting from installation work for recycling whenever possible.
- .6 Establish methods whereby hazardous and toxic waste materials, and their containers, encountered or used in the course work are properly isolated, stored on site and disposed in accordance with applicable laws and regulations from authorities having jurisdiction.
- .7 Isolate and store existing materials and equipment identified for re-incorporation into the Work. Protect against damage.

1.6 WORKER TRAINING AND SUPERVISION

- .1 Provide adequate training to workforce, through meetings and demonstrations, to emphasize purpose and worker responsibilities in carrying out the Waste Management Plan.
- .2 Waste Management Coordinator: designate full-time person on site, experienced in waste management and having knowledge of the purpose and content of Waste Management Plan to:
 - .1 Oversee and supervise waste management during work.
 - .2 Provide instructions and directions to all workers and subcontractors on waste

		ONSTRUCTION/DEMOLITION	Section 01 74 21
Slipway Reconstruction Hermitage, NL	WAS	TE MANAGEMENT AND DISPOSAL	Page 5
Project Number 721935			2019-03-03
		reduction, source separati practices.	on and disposal
	.3	Post a copy of Plan in a p on site for review by work	
1.7 CERTIFICATION OF MATERIAL DIVERSION	.1	Submit to Departmental Rep copies of certified weigh authorized waste processin receipts from recycling/re confirming receipt of build quantity of waste diverted	bills from g sites and sale use facilities ling materials and
	.2	Submit data at pre-determi milestones as determined b Representative.	
	.3	Compare actual quantities landfill with projections audit.	
1.8 DISPOSAL REQUIREMENTS	.1	Burying or burning of rubb materials is prohibited.	ish and waste
	. 2	Disposal of waste, volatil mineral spirits, oil, pain or unused preservative mat waterways, storm, or sanit prohibited.	t, paint thinner erial into
	.3	Do not dispose of preserva through incineration.	tive treated wood
	. 4	Do not dispose of preserva with other materials desti or reuse.	
	.5	Dispose of treated wood, e scraps and sawdust at a sa	_

.6 Dispose of waste only at approved waste processing facility or landfill sites

	CONSTRUCTION/DEMOLITION	Section 01 74 21
	WASTE MANAGEMENT AND DISPOSAL	
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

approved by authority having jurisdiction.

- .7 Contact the authority having jurisdiction prior to commencement of work, to determine what, if any, demolition and construction waste materials have been banned from disposal in landfills and at transfer stations. Take appropriate action to isolate such banned materials at site of work and dispose in strict accordance with provincial and municipal regulations.
- .8 Transport waste intended for landfill in separated condition, following rules and recommendations of Landfill Operator in support of their effort to divert, recycle and reduce amount of solid waste placed in landfill.
- .9 Collect, bundle and transport salvaged materials to be recycled in separated categories and condition as directed by recycling facility. Ship materials only to approved recycling facilities.
- .10 All creosote timber encountered is to be disposed of at a Provincially approved lined waste site such as Norris Arm or Robin Hood Bay (St. John's). Contractor must provide Departmental Representative with all weigh bill slips/tipping slips.

	CLOSEOUT SUBMITTALS	Section 01 78 00
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

1.1 SECTION INCLUDES

- .1 Project Record Documents as follows:
 - .1 As-built drawings;
 - .2 As-built specifications;
 - .3 Reviewed shop drawings.

1.2 PROJECT RECORD DOCUMENTS

- .1 Departmental Representative will provide two white print sets of contract drawings and two copies of Specifications Manual specifically for "as-built" purposes.
- .2 Maintain at site one set of the contract drawings and specifications to record actual as-built site conditions.
- .3 Maintain up-to-date, real time as-built drawings and specifications in good condition and make available for inspection by the Departmental Representative at any time during construction.

.4 As-Built Drawings:

- .1 Record changes in red ink on the prints. Mark only on one set of prints and at completion of project and prior to final inspection, neatly transfer notations to second set (also by use of red ink). Submit both sets to Departmental Representative. All drawings of both sets shall be stamped "As-Built Drawings" and be signed and dated by Contractor.
- .2 Show all modifications, substitutions and deviations from what is shown on the contract drawings or in specifications.
- .3 Record following information:
 - .1 Horizontal and vertical location of various elements in relation to Geodetic Datum.
 - .2 Field changes of dimension and detail.
 - .3 All design elevations, sections, and details dimensioned and marked-up to consistently report finished installation conditions.
 - .4 Any details produced in the course

	CLOSEOUT SUBMITTA	TC	Section 01	7.0	0.0
	CHOSEOUI SUBMITTE	VIIO ,	36661011 01	70	00
			_		
Slipway Reconstruction]	Page 2		
Hermitage, NL					
Project Number 721935			2019-03-03		

of the contract by the Departmental Representative to supplement or to change existing design drawings must also be marked-up and dimensioned to reflect final as-built conditions and appended to the as-built drawing document.

- .5 All change orders issued over the course of the contract must be documented on the finished as-built documents, accurately and consistently depicting the changed condition as it applies to all affected drawing details.
- .5 As-built Specifications: legibly mark in red each item to record actual construction, including:
 - .1 Manufacturer, trade name, and catalogue number of each product actually installed, particularly items substituted from that specified.
 - .2 Changes made by Addenda and Change Orders.
 - .3 Mark up both copies of specifications; stamp "as-built", sign and date similarly to drawings as per above clause.
- .6 Maintain As-built documents current as the contract progresses. Departmental Representative will conduct reviews and inspections of the documents on a regular basis. Frequency of reviews will be subject to Departmental Representative's discretion. Failure to maintain as-builts current and complete to satisfaction of the Departmental Representative shall be subject to financial penalties in the form of progress payment reductions and holdback assessments.

1.3 REVIEWED SHOP DRAWINGS

.1 Compile 2 full sets of all reviewed shop drawings.

SITEWORK, DEMOLITION AND REMOVAL	Section 02 41 16
	Page 1
	2019-03-03
	•

PART 1 - GENERAL

1.1 DESCRIPTION

- .1 This section specifies requirements for demolishing and removing wholly or in part various items designated to be removed or partially removed.
- .2 Demolition and removal will consist of, but not necessarily be limited to, the following:
 - .1 Demolition, removal, and disposal of the existing slipway and launchway, as noted on the drawings.
 - .2 Demolition, removal, and disposal of the existing boardwalk, as noted on the drawings.

1.2 GENERAL REQUIREMENTS

- .1 A Notice to Shipping is to be issued prior to commencement and upon completion of work.
- .2 During construction, any vessels or barges utilized must be marked in accordance with the provisions of the Canada Shipping Act Collision Regulations.
- .3 Upon completion of the project, a written Notice to Mariners must be issued.

1.3 PROTECTION

- .1 Protect existing objects designated to remain. In event of damage, immediately replace or make repairs to approval of and at no additional cost to Canada.
- .2 Place a floating boom around entire demolition site to prevent loss of any materials. Minimum requirements for the floating boom would be a top flotation device constructed of PVC material, a hung skirt to suit site conditions (with minimum tension resistance of 2,500kg), tension cable, and ballast chain.

EWORK, DEMOLITION Section 02 41 16 AND REMOVAL	
Page 2	Slipway Reconstruction Hermitage, NL
2019-03-03	Project Number 721935
2019-03-03	Project Number 721935

.3 Remove all floating debris from water on a routine and timely basis.

PART 2 - PRODUCTS

NOT APPLICABLE

PART 3 - EXECUTION

3.1 EXECUTION

- .1 Inspect site and verify with Departmental Representative objects designated for removal.
- .2 Locate and protect utility lines. Preserve in operating condition active utilities traversing site.

3.2 REMOVAL

- .1 Remove in their entirety all materials and objects specified for removal.
- .2 Do not disturb adjacent work designated to remain in place.

3.3 DISPOSAL OF MATERIAL

.1 All demolished materials, except materials designated to be reused, will become property of contractor and will be removed from site and disposed of to satisfaction of Departmental Representative and in accordance with environmental guidelines. It is the sole responsibility of the contractor to dispose of all demolished materials at an approved disposal site. Ensure that disposal site is approved and willing to accommodate any materials disposed of from work site.

	SITEWORK, DEMOLITION AND REMOVAL	Section 02 41 16
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

- .2 Contractor shall obtain and pay for all necessary permits and disposal fees for use of an approved waste disposal site.
- .3 All creosote timber encountered is to be disposed of at a Provincially approved lined waste site such as Norris Arm or Robin Hood Bay (St. John's). Contractor must provide Departmental Representative with all weigh bill slips/tipping slips.

3.4 RESTORATION

- .1 Upon completion of work, remove debris, trim surfaces and leave work site in clean condition.
- .2 Reinstate areas and existing works outside areas of demolition to conditions that existed prior to commencement of work.

	CONCRETE FORMING AND ACCESSORIES	Section 03 10 00
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 RELATED SECTIONS

- .1 Section 03 20 00 Concrete Reinforcing.
- .2 Section 03 30 00 Cast-in-Place Concrete.
- .3 Section 07 92 10 Joint Sealing.

1.2 REFERENCES

- .1 Canadian Standards Association (CSA)
 - .1 CAN/CSA-A23.1-09, Concrete Materials and Methods of Concrete Construction.
 - .2 CAN/CSA-086-09, Engineering Design in Wood.
 - .3 CSA 0121-08, Douglas Fir Plywood.
 - .4 CSA 0151-09, Canadian Softwood Plywood.
 - .5 CSA 0153-M1980 (R2008), Poplar Plywood.
 - .6 CAN3-0188.0-M78, Standard Test Methods for Mat-Formed Wood Particleboards and Waferboard.
 - .7 CSA 0437 Series-93 (R2006), Standards for OSB and Waferboard.
 - .8 CSA S269.1-1975 (R2003), Falsework for Construction Purposes.
 - .9 CAN/CSA-S269.3-M92 (R2008), Concrete Formwork.

1.3 SHOP DRAWINGS

- .1 Submit shop drawings for formwork and falsework in accordance with Section 01 33 00- Submittal Procedures.
- .2 Indicate method and schedule of construction, shoring, stripping and re-shoring procedures, materials, arrangement of joints, special architectural exposed finishes, ties, liners, and locations of temporary embedded parts. Comply with CSA S269.1, for falsework drawings Comply with CAN/CSA-S269.3 for formwork drawings.
- .3 Indicate formwork design data, such as permissible rate of concrete placement, and

	CONCRETE FORMING AND ACCESSORIES	Section 03 10 00
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

temperature of concrete, in forms.

- .4 Indicate sequence of erection and removal of formwork/falsework as directed by Departmental Representative.
- .5 Each shop drawing submission shall bear stamp and signature of qualified Professional Engineer registered or licensed in Province of Newfoundland and Labrador, Canada.

1.4 WASTE MANAGEMENT AND DISPOSAL

- .1 Separate and recycle waste materials in accordance with Section 01 74 21 Construction/Demolition Waste Management and Disposal and the Waste Reduction Workplan.
- .2 Place materials defined as hazardous or toxic waste in designated containers.
- .3 Ensure emptied containers are sealed and stored safely for disposal away from children.
- .4 Use sealers, form release and stripping agents that are non-toxic, biodegradable and have zero or low VOC's.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Formwork materials:
 - .1 Use formwork materials to CAN/CSA-A23.1.
- .2 Form ties:
 - .1 Removable or snap-off metal ties, fixed or adjustable length, free of devices leaving holes larger than 25 mm diameter in concrete surface.
- .3 Form release agent: non-toxic, chemically active release agents containing compounds

	CONCRETE FORMING AND	Section 03 10 00
	ACCESSORIES	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

that react with free lime present in concrete to provide water insoluble soaps, preventing set of film of concrete in contact with form.

- .4 Falsework materials: to CSA-S269.1.
 - .1 Materials required to bear grade marks, or be accompanied with certificates, test reports or other proof of conformity.
- .5 Premoulded joint fillers:
 - .1 Bituminous impregnated fibreboard to ASTM D1751 and CSA A247.2.
- .6 Bond Breaker:
 - .1 Impermeable tube formed of polyvinylchloride, rubber or similar material to the approval of the Departmental Representative. Internal diameter equal to dowels.
- .7 Sealant: to Section 07 92 10 Joint Sealing.

PART 3 - EXECUTION

3.1 FABRICATION AND ERECTION

- .1 Verify lines, levels and centres before proceeding with formwork/falsework and ensure dimensions agree with drawings.
- .2 Obtain Departmental Representative's approval for use of earth forms framing openings not indicated on drawings.
- .3 Hand trim sides and bottoms and remove loose earth from earth forms before placing concrete.
- .4 Fabricate and erect falsework in accordance with CSA S269.1.
- .5 Fabricate and erect formwork in accordance

	CONCRETE FORMING AND	Section 03 10 00
	ACCESSORIES	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

with CAN/CSA-S269.3 to produce finished concrete conforming to shape, dimensions, locations and levels indicated within tolerances required by CAN/CSA-A23.1.

- .6 Align form joints and make watertight. Keep form joints to minimum.
- .7 Use 25 mm chamfer strips on external corners and/or 25 mm fillets at interior corners, joints, unless specified otherwise.
- .8 Form chases, slots, openings, drips, recesses, expansion and control joints as indicated.
- .9 Build in anchors, sleeves, and other inserts required to accommodate Work specified in other sections. Assure that all anchors and inserts will not protrude beyond surfaces designated to receive applied finishes, including painting.
- .10 Clean formwork in accordance with CAN/CSA-A23.1, before placing concrete.

3.2 REMOVAL AND RESHORING

- .1 Leave formwork in place for following minimum periods of time after placing concrete.
 .1 5 days for slabs, decks and other structural members, or 3 days when replaced immediately with adequate shoring to standard specified for falsework.
- .2 Remove formwork when concrete has reached 75% of its design strength or minimum period noted above, whichever comes later, and replace immediately with adequate reshoring.
- .3 Provide all necessary reshoring of members where early removal of forms may be required or where members may be subjected to additional loads during construction as

	CONCRETE FORMING ACCESSORIES	AND	Section 03 10 00
Slipway Reconstruction			Page 5
Hermitage, NL			
Project Number 721935			2019-03-03

required.

- .4 Space reshoring in each principal direction at not more than 3000 mm apart.
- .5 Re-use formwork and falsework subject to requirements of CAN/CSA-A23.1.

3.3 JOINT SEALANT

.1 Fill control joints with approved waterproof sealant as per manufacturer instructions.

	CONCRETE REINFORCING	Section 03 20 00
Slipway Reconstruction		Page 1
Hermitage, NL Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 RELATED SECTIONS

- .1 Section 03 10 00 Concrete Forming and Accessories.
- .2 Section 03 30 00 Cast-in-Place Concrete.

1.2 REFERENCES

- . 1 American Concrete Institute (ACI)
 - .1 ACI 315R-04, Manual of Engineering and Placing Drawings for Reinforced Concrete Structure.
- .2 American National Standards
 Institute/American Concrete Institute
 (ANSI/ACI)
 - .1 ANSI/ACI 315-99, Details and Detailing of Concrete Reinforcement.
- .3 American Society for Testing and Materials International (ASTM)
 - .1 ASTM A185/A185M-07, Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete.
 - .2 ASTM A497/A497M-07, Standard Specification for Steel Welded Wire Reinforcement, Deformed, for Concrete.
 - .3 ASTM-A123/A123M-09, Standard Specification for Zinc (Hot Dip Galvanized) Coatings on Iron and Steel Products.
- .4 Canadian Standards Association (CSA)
 - .1 CAN/CSA-A23.1-09, Concrete Materials and Methods of Concrete Construction.
 - .2 CSA-A23.3-04(R2010), Design of Concrete Structures.
 - .3 CAN/CSA-G30.18-09, Carbon Steel Bars for Concrete Reinforcement.
 - .4 CSA-G40.20-04/G40.21-04(R2009), General Requirements for Rolled or Welded Structural Quality Steel/Structural Quality Steel
- .5 CSA W186-M1990 (R2007), Welding of

	CONCRETE R	EINFORCING	Section	03	20	00
Slipway Reconstruction Hermitage, NL			Page 2			
Project Number 721935			2019-03-	-03		

Reinforcing Bars in Reinforced Concrete Construction.

1.3 SHOP DRAWINGS

- .1 Submit shop drawings including placing of reinforcement in accordance with Section 01 33 00 Submittal Procedures.
- . 2 Indicate on shop drawings, bar bending details, lists, quantities of reinforcement, sizes, spacings, locations of reinforcement and mechanical splices if approved by Departmental Representative, with identifying code marks to permit correct placement without reference to structural drawings. Indicate sizes, spacings and locations of chairs, spacers and hangers. Prepare reinforcement drawings in accordance with Reinforcing Steel Manual of Standard Practice - by Reinforcing Steel Institute of Canada. ANSI/ACI 315 and ACI 315R, Manual of Engineering and Placing Drawings for Reinforced Concrete Structure.

1.4 WASTE MANAGEMENT AND DISPOSAL

.1 Separate and recycle waste materials in accordance with Section 01 74 21 - Construction/Demolition Waste Management and Disposal and the Waste Reduction Workplan.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Substitute different size bars only if permitted in writing by Departmental Representative.
- .2 Reinforcing steel: billet steel, grade 400, deformed bars to CAN/CSA-G30.18, unless indicated otherwise.

	CONCRETE REINFORCING	Section 03 20 00
Slipway Reconstruction		Page 3
Hermitage, NL Project Number 721935		2019-03-03

- .3 Reinforcing steel: weldable low alloy steel deformed bars to CAN/CSA-30.18.
- .4 Cold-drawn annealed steel wire ties: to ASTM A-82/A-82M.
- .5 Welded steel wire fabric: to CSA G30.5. Provide in flat sheets only.
- .6 Chairs, bolsters, bar supports, spacers: to CAN/CSA-A23.1.
- .7 Mechanical splices: subject to approval of Departmental Representative.

2.2 FABRICATION

- .1 Fabricate reinforcing steel in accordance with CAN/CSA-A23.1, ANSI/ACI 315, and Reinforcing Steel Manual of Standard Practice by the Reinforcing Steel Institute of Canada. ACI 315R, Manual of Engineering and Placing Drawings for Reinforced Concrete Structures unless indicated otherwise.
- .2 Obtain Departmental Representative's approval for locations of reinforcement splices other than those shown on placing drawings.
- .3 Upon approval of Departmental Representative, weld reinforcement in accordance with CSA W186.
- .4 Ship bundles of bar reinforcement, clearly identified in accordance with bar bending details and lists.

2.3 SOURCE QUALITY CONTROL

.1 Provide Departmental Representative with certified copy of mill test report of reinforcing steel, showing physical and

	CONCRETE	REINFORCING	Section	03	20	00
Slipway Reconstruction Hermitage, NL			Page 4			
Project Number 721935			2019-03-	-03		

chemical analysis, minimum 2 weeks prior to commencing reinforcing work.

.2 Upon request inform Departmental Representative of proposed source of material to be supplied.

PART 3 - EXECUTION

3.1 FIELD BENDING

- .1 Do not field bend or field weld reinforcement except where indicated or authorized by Departmental Representative.
- .2 When field bending is authorized, bend without heat, applying a slow and steady pressure.
- .3 Replace bars which develop cracks or splits.

3.2 PLACING REINFORCEMENT

- .1 Place reinforcing steel as indicated on reviewed placing drawings and in accordance with CAN/CSA-A23.1.
- .2 Use approved type chairs to locate the reinforcing steel at the proper grade.
- .3 Tie reinforcement where spacing in each direction is:
 - .1 Less than 300 mm: tie at alternate intersections.
 - .2 300 mm or more: tie at each intersection.
- .4 Prior to placing concrete, obtain
 Departmental Representative's approval of reinforcing material and placement.

	(CONCRETE	REINFORCING	Section 03 20 00
Slipway Reconstruction Hermitage, NL				Page 5
Project Number 721935				2019-03-03
	.5		cover to reinforcem concrete pour.	ment is maintained
3.3 CLEANING	.1	Clean 1	reinforcing before p	lacing concrete to

CAN/CSA-A23.1.

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 DESCRIPTION .1 This section specifies requirements for supply, placing, finishing, protecting and curing cast-in-place concrete for the concrete launchway.

1.2 RELATED SECTIONS

- .1 Section 03 10 00 Concrete Forming and Accessories.
- .2 Section 03 20 00 Concrete Reinforcing.

1.3 REFERENCES

- - .1 ASTM C109/C109M-08, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2 in. or 50 mm Cube Specimens).
 - .2 ASTM C260/260M-10a, Standard Specification for Air-Entraining Admixtures for Concrete.
 - .3 ASTM C494/C494M-10a, Standard Specification for Chemical Admixtures for Concrete.
- .2 Canadian General Standards Board (CGSB)
 .1 CAN/CGSB-51.34-M86, Vapour Barrier,
 Polyethylene Sheet for Use in Building
 Construction.
- .3 Canadian Standards Association (CSA)
 - .1 CAN/CSA-A23.1-09, Concrete Materials and Methods of Concrete Construction.
 - .2 CAN/CSA-A23.2-09, Methods of Test for Concrete.
 - .3 CSA-A283-06, Qualification Code for Concrete Testing Laboratories.
 - .4 CAN/CSA-A3000-08, Cementitious Materials Compendium (consists of A3001, A3002, A3003, A3004 and A3005).
 - .1 CSA-A3001-08, Cementitious

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction		Page 2
Hermitage, NL Project Number 721935		2019-03-03

Materials for Use in Concrete.

1.4 CERTIFICATES

- .1 Submit certificates in accordance with Section 01 33 00 Submittal Procedures.
- .2 Minimum 2 weeks prior to starting concrete work submit to Departmental Representative manufacturer's test data and certification by qualified independent inspection and testing laboratory that following materials will meet specified requirements:
 - .1 Portland cement.
 - .2 Blended hydraulic cement.
 - .3 Supplementary cementing materials.
 - .4 Grout.
 - .5 Admixtures.
 - .6 Aggregates.
 - .7 Water.
 - .8 Joint filler.
 - .9 Joint Sealant.
- .3 Provide certification that mix proportions selected will produce concrete of quality, yield and strength as specified in concrete mixes, and will comply with CAN/CSA-A23.1.
- .4 Provide certification that plant, equipment, and materials to be used in concrete comply with requirements of CAN/CSA-A23.1.

1.5 STORAGE OF MATERIALS

- .1 Store materials to prevent contamination or deterioration.
- .2 Provide adequate storage facilities for materials to ensure a continuous supply of these materials during batching operations.
- .3 Store cement in weathertight facility.

		CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL Project Number 721935			Page 3 2019-03-03
1.6 QUALITY ASSURANCE	.1	Minimum 2 weeks prior to work, submit proposed querocedures to Department for the following items: .1 Cold weather concret2 Curing3 Finishes4 Formwork removal5 Joints.	ality control al Representative
1.7 WASTE MANAGEMENT AND DISPOSAL	.1	Use trigger operated spr water hoses.	ay nozzles for
	. 2	Designate a cleaning are limit water use and runo	
	. 3	Carefully coordinate the concrete work with weath	_
	. 4	Ensure emptied container stored safely for dispos children.	
	.5	Prevent plasticizers, wa agents and air-entrainin entering drinking water streams. Using appropria precautions, collect liquid with an inert, no material and remove for of all waste in accordan local, provincial and na regulations.	g agents from supplies or te safety uid or solidify ncombustible disposal. Dispose ce with applicable
	.6	Choose least harmful, ap method which will perfor	
1.8 MEASUREMENT FOR PAYMENT	.1	Concrete Launchway - Wor and installation of rein launchway slab to be mea metres (m²) calculated f measurements. Contractor plant, equipment, materi including concrete, rein	forced concrete sured in square rom actual field to provide all al, and labour

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

dewatering measures (if required) to pour cast-in-place concrete.

.2 No separate payment will be made for any other ingredient or feature of concrete work, and all factors, including cold weather placement, reinforcing steel, anchor bolts, joint filler for control joints, cement, plant and labour will be considered as being included in the unit price for item.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Cement to CAN/CSA-A3001, Type TerC3.
- .2 Supplementary cementing materials: to CAN/CSA-A3001.
- .3 Cementitious hydraulic slag: to CAN/CSA-A3001.
- .4 Water: to CAN/CSA-A23.1.
- .5 Aggregates: to CAN/CSA-A23.1. Coarse aggregates to be normal density.
- .6 Air entraining admixture: to ASTM C260.
- .7 Chemical admixtures: to ASTM C494/C494M.

 Departmental Representative to approve accelerating or set retarding admixtures during cold and hot weather placing.
- .8 Concrete retarders: to ASTM C494/C494M. Do not allow moisture of any kind to come in contact with the retarder film.
- .9 Curing compound: curing compounds are not to be used.
- .10 Premoulded joint fillers:

-	CAST-IN-PLACE CONCRETE	Section 03 30 00
	CASI-IN-PLACE CONCRETE	Section 03 30 00
		_
Slipway Reconstruction		Page 5
Hermitage, NL		
Project Number 721935		2019-03-03

.1 Sponge rubber: to ASTM D1752, Type I, flexible grade.

2.2 MIXES

- .1 Proportion concrete in accordance with CAN/CSA-A23.1, Clause 4.3.
- .2 Proportion concrete to comply with Alternate 1, Table 2 in CAN/CSA-A23.1 and following requirements:
 - .1 Cement:
 - .1 Type TerC3.
 - .2 Minimum compressive strength: 35 MPa at 28 days.
 - .3 Class of exposure: C1.
 - .4 Minimum cement content: 385 kg/m³ of concrete.
 - .5 20 mm nominal size coarse aggregate.
 - .6 Air content 5% to 8%.
 - .7 Density of air-dry concrete in range of 2240 kg/m³ to 2400 kg/m³.
 - .8 Slump at time and point of discharge 50 mm to 100 mm.
- .3 When the Contractor wishes to purchase concrete from a ready mix concrete supplier, submit a letter from the supplier certifying the following:
 - .1 That plant and equipment is certified and all materials to be used in the concrete comply with the requirements of CAN/CSA-A23.1.
 - .2 That the mix proportions selected will produce concrete of the specified quality and yield. Indicate mix proportions and sources of all materials.
 - .3 That the strengths will comply with the strengths specified herein.
- .4 When the Contractor wishes to mix concrete on site, identify the source of aggregates and submit samples of fine and coarse aggregates to a testing laboratory for

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

testing and trial mixes in order to determine a suitable mix design. The testing laboratory, at Contractor's cost, will test the trial mix for slump, air content, density and strength. The results of these tests will be submitted to the Departmental Representative to be reviewed for compliance with the specification. This review must be completed before permission to place concrete is given.

1.1 The sand, gravel, water and air entraining agent should be mixed prior to the addition of cement and water reducer.

- .5 Weigh aggregates, cement, water and admixture when batching. No alternative methods of measuring will be permitted.
- .6 Do not use calcium chloride.

PART 3 - EXECUTION

3.1 PREPARATION

- .1 Obtain Departmental Representative's approval before placing concrete. Provide 24 hours notice prior to placing of concrete.
- .2 Pumping of concrete is permitted only after approval of equipment and mix.
- .3 Ensure reinforcement and inserts are not disturbed during concrete placement.
- .4 Prior to placing of concrete obtain
 Departmental Representative's approval of
 proposed method for protection of concrete
 during placing and curing in adverse
 weather.
- .5 Maintain accurate records of poured concrete items to indicate date, location of pour, quality, air temperature and test samples taken.

		CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL			Page 7
Project Number 721935			2019-03-03
	.6	Do not place load upon new authorized by Departmental	
3.2 CONSTRUCTION	.1	Comply with additional rec CAN/CSA-A23.1, Clause 4.1. concrete exposed to seawat	1.5, for
	.2	Minimum concrete cover over steel bars to be 75 mm.	er reinforcing
	.3		ther to CAN/CSA-
	. 4	Place concrete in cold wea A23.1.	ther to CAN/CSA-
	.5	Keep concrete surfaces moi during protection stage.	st continually
	.6	Place, consolidate, finish protect concrete to CAN/CS	
	.7	Do not commence placing condense place possible per partmental Representative and approved forms, foundation of the presentation of the presentati	re has inspected ations, conveying, and finishing
3.3 FORMWORK	.1	Install and strip formwork A23.1 and Section 03 10 00	
3.4 INSERTS	.1	Position and secure anchor formwork to maintain line	
3.5 CONTROL JOINTS	.1	Construct control joints i shown on drawings or direc Departmental Representativ	ted by

. 2

All joints will be centred over a support.

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL		Page 8
Project Number 721935		2019-03-03

Joints will be made in a perfectly straight line.

- .3 Cut control joint when concrete has hardened.
- .4 Fill saw cut with joint sealer as specified.

3.6 PLACING CONCRETE

- .1 Place and consolidate concrete to CAN/CSA-A23.1.
- .2 Do not place concrete on or against frozen material.
- .3 Place concrete continuously from joint to joint.
- .4 Place concrete in a uniform heading, normal to the centreline. Limit rate of placing to that which can be finished before beginning of initial set.

3.7 STRIKE OFF AND CONSOLIDATION

- .1 High speed internal poker vibrators shall be used to consolidate the concrete during placing. Final compaction of the surfaces shall be done by beam-type vibratory air screed as approved by Departmental Representative. A surcharge of approximately 65 mm of concrete will be maintained at the screed face during consolidation.
- .2 Strikeoff and consolidation must be completed before excess water bleeds to the surface.
- .3 Ensure that the concrete deck conforms to the elevations and slopes as shown on the drawings so that satisfactory drainage will result.

-	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL		Page 9
Project Number 721935		2019-03-03

3.8 FINISHING

- .1 Only ACI certified or other pre-approved concrete finishers are to be utilized in finishing all concrete works. All work is to be finished to CAN/CSA-A23.1, and as specified below.
- .2 The surface will be brought to the specified level by means of darbying or bull floating which will be carried out immediately following screeding and must be completed before any bleed water is present on the surface. Surface tolerance to be 8 mm under a 3 metre straight edge.
- .3 Provide slope as shown on the drawings to permit proper drainage of the concrete deck.
- .4 Finish slabs to elevations indicated on drawings.
- .5 Strike off the surface with a straight edge.
- .6 Hand tamp low slump concrete with jitterbug.
- .7 Darby or bull float the surface to smooth and level the concrete.
- .8 Allow bleed water or sheen to disappear.
- .9 Float the surface by means of power and/or hand float where the concrete has hardened enough for a man to leave only slight footprints on the surface.
- .10 Do not bring water and fines to the surface by over floating. Where extra floating is required the floating operation shall be repeated after the time interval necessary for any sheen to disappear and for concrete to set further.

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction		Page 10
Hermitage, NL		
Project Number 721935		2019-03-03

- .11 Steel trowel the concrete surfaces by means of power and/or hand trowel. Do not leave any hard, smooth, polished or burnished surface area.
- .12 Do not bring water and fines to the surface by overtrowelling.
- .13 After slight interval necessary for concrete to further harden, repeat the trowelling operation.
- .14 Lightly broom surface with a soft bristle broom obtaining a fine and even textured finish with a non-slip finish. All brush strokes to be parallel across paving.
- .15 The surface shall be true and accurate to a maximum tolerance of 1 mm in 500 mm.

3.9 PROTECTION AND CURING

- .1 Cure to CAN/CSA-A23.1.
- . 2 Cure concrete by protecting it against loss of moisture, rapid temperature change and mechanical injury for at least 7 days after placement. After finishing operations have been completed, the entire surface of the newly placed concrete shall be covered by whatever curing medium is applicable to local conditions and approved by the Departmental Representative. The edges of concrete slabs exposed by removal of forms shall be protected with continuous curing treatment equal to the method selected for curing the slab and curb surfaces. Cure to CAN/CSA-A23.1. Have the equipment needed for adequate curing at hand and ready to install before actual concrete placement begins.
- .3 When air temperature is at or below 5°C or when there is a probability of its falling

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction		Page 11
Hermitage, NL Project Number 721935		2019-03-03

to that limit within 24 hours of placing (as forecast by the nearest official meteorological office) cold weather protection as per CAN/CSA-A23.1 will be provided and the following:

- .1 Housing Protect concrete by a windproof shelter of canvas or other material to allow free circulation of inside air around fresh touch formwork and provide sufficient space for removal of formwork for finishing. Supply approved heating equipment capable of keeping inside air at a constant temperature sufficiently high to maintain concrete at following curing temperatures.
 - .1 For initial 3 days at a temperature of not less than 15°C nor more than 27°C at surface.
 - .2 Maintain concrete at 10°C for an extra 4 days plus the initial 3 days.
 - .3 In addition to the protective housing, the concrete must be cured as outlined in Clause 3.9.2 above.

3.10 TESTING

- .1 Departmental Representative will appoint a concrete testing company to test all work under this section of specification as per CAN/CSA-A23.1.
- .2 Cost of compressive strength tests shall be paid for by the Departmental Representative.
- .3 Testing company shall issue reports to Departmental Representative on quality of test cylinders.
- .4 Notify Departmental Representative at least 7 days prior to start of placing concrete. Provide for testing purposes an adequate quantity of approved test cylinders.

	CAST-IN-PLACE CONCRETE	Section 03 30 00
Slipway Reconstruction Hermitage, NL		Page 12
Project Number 721935		2019-03-03

- .5 At least 1 set of 3 cylinders each shall be taken from 25 m³ or fraction thereof of each day's pour, whichever is less. 1 cylinder shall be tested at 7 days and other 2 tested at 28 days.
- .6 Crate cylinders and deliver to the testing laboratory within 48 hours after casting in accordance with CAN/CSA-A23.1.

 Contractor will pay for crating and delivery of cylinders to the laboratory.
- .7 If strength tests of test cylinder for any portion of the work falls below the specified compressive strength at 28 days, the Departmental Representative reserves the right to determine the acceptability of the concrete by performing additional field testing as outlined in CAN/CSA-A23.1.
- .8 If concrete does not conform to drawings or specifications, take measures as directed to correct the deficiency. All costs of correctional measures will be at the expense of the Contractor.

	UNDERWATER PLACED	Section 03 37 26
	CONCRETE	
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

PART 1 - GENERAL		
1.1 SECTION INCLUDES	.1	This section specifies requirements for supply, placing, finishing, protecting and curing concrete in an underwater location (if required - depending on the Contractor's methodology). There is no additional payment for placing underwater concrete.
1.2 RELATED SECTIONS	.1	Section 01 74 21 - Construction/Demolition Waste Management and Disposal.
	.2	Section 31 53 13 - Timber Cribwork.
1.3 REFERENCES	1	Canadian Standards Association (CSA International) .1 CAN/CSA-A23.1/A23.2-04, Concrete Materials and Methods of Concrete Construction/Methods of Test for Concrete.
1.4 DEFINITIONS PART 2 - PRODUCTS	1	Tremie concrete is placed underwater through tube called tremie pipe. 1 Tremie pipe has a hopper at upper end and may be open ended or may have foot valve, plug or travelling plug to control flow of concrete. 2 Concrete is placed in hopper and sufficient head of concrete is maintained in tremie pipe to provide desired rate of flow.
	. 2	Pumped concrete method of placing concrete underwater uses concrete pump with discharge line used in similar manner to a tremie pipe.
O 1 MARRIDIALO	1	Company to CANI/CCA A 2001

2.1 MATERIALS .1 Cement to CAN/CSA-A3001, Type TerC3 with V-mar ati-washout.

	UNDERWATER PLACED	Section 03 37 26
	CONCRETE	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

- .2 Supplementary cementing materials: to CAN/CSA-A3001.
- .3 Cementitious hydraulic slag: to CAN/CSA-A3001.
- .4 Water: to CAN/CSA-A23.1.
- .5 Aggregates: to CAN/CSA-A23.1. Coarse aggregates to be normal density.
- .6 Air entraining admixture: to ASTM C260.
- .7 Chemical admixtures: to ASTM C494/C494M.

 Departmental Representative to approve accelerating or set retarding admixtures during cold and hot weather placing.
- .8 Concrete retarders: to ASTM C494/C494M. Do not allow moisture of any kind to come in contact with the retarder film.
- .9 Curing compound: curing compounds are not to be used.

2.2 MIXES

- .1 Proportion concrete in accordance with CAN/CSA-A23.1, Clause 4.3.
- .2 Proportion concrete to comply with Alternate 1, Table 2 in CAN/CSA-A23.1 and following requirements:
 - .1 Cement:
 - .1 Type TerC3 cement.
 - .2 Minimum compressive strength: 35 MPa at 28 days.
 - .3 Class of exposure: C1.
 - .4 Minimum cement content: 385 kg/m^3 of concrete.
 - .5 20 mm nominal size coarse aggregate.
 - .6 Air content 5% to 8%.
 - .7 Density of air-dry concrete in range of 2240 kg/m^3 to 2400 kg/m^3 .
 - .8 Slump at time and point of discharge

	UNDERWATER PLACED	Section 03 37 26
	CONCRETE	
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

50 mm to 100 mm.

- .3 When the Contractor wishes to purchase concrete from a ready mix concrete supplier, submit a letter from the supplier certifying the following:
 - .1 That plant and equipment is certified and all materials to be used in the concrete comply with the requirements of CAN/CSA-A23.1.
 - .2 That the mix proportions selected will produce concrete of the specified quality and yield. Indicate mix proportions and sources of all materials.
 - .3 That the strengths will comply with the strengths specified herein.
- .4 When the Contractor wishes to mix concrete on site, identify the source of aggregates and submit samples of fine and coarse aggregates to a testing laboratory for testing and trial mixes in order to determine a suitable mix design. The testing laboratory, at Contractor's cost, will test the trial mix for slump, air content, density and strength. The results of these tests will be submitted to the Departmental Representative to be reviewed for compliance with the specification. This review must be completed before permission to place concrete is given.
 - .1 The sand, gravel, water and air entraining agent should be mixed prior to the addition of cement and water reducer.
- .5 Weigh aggregates, cement, water and admixture when batching. No alternative methods of measuring will be permitted.
- .6 Do not use calcium chloride.

	UNDERWATER PLACED	Section 03 37 26
	CONCRETE	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

PART 3 - EXECUTION

3.1 PREPARATION

- .1 Where concrete must bond to existing surfaces, clean surfaces just prior to starting concrete placement.
 - .1 Use water jets, mechanical scrapers or other means, and when quantities of mud or rock cuttings are present, remove by air lift.

3.2 INSTALLATION

- .1 Do concrete work in accordance with CAN/CSA-A23.1/A23.2. Testing for concrete to CAN/CSA-A23.1/A23.2, except where specified otherwise.
- .2 Where concrete placement extends above water surface, protect concrete from direct contact with air at temperature below 5 degrees C for 7 days.
- .3 Place concrete in one continuous operation to full depth required.
 - .1 Supply complete equipment for every phase of operation.
 - .2 Provide sufficient supply of concrete to complete pour without interruption.

.4 Tremie method.

- .1 Provide water-tight tremie pipe sized to allow free flow of concrete. Diameter of tremie pipe to be minimum 200 mm and minimum eight times maximum size of coarse aggregate.
- .2 Provide hopper at top of tremie pipe and means to raise and lower tremie pipe.
- .3 Provide plug or foot valve at bottom of tremie pipe to permit filling pipe with concrete initially.
- .4 Provide minimum of one tremie pipe for every $30~\text{m}^2$ of plan area and to maximum spacing of 6 m centre to centre. Do not move tremie pipes laterally through concrete.
- .5 Start placement with tremie pipe full of concrete. Keep bottom of pipe buried minimum 300 mm in freshly placed concrete.

	UNDERWATER PLACED	Section 03 37 26
	CONCRETE	
Slipway Reconstruction		Page 5
Hermitage, NL		
Project Number 721935		2019-03-03

Control rate of flow by varying depth of pipe bottom in concrete.

- .6 If seal is lost, allowing water to enter pipe, withdraw pipe immediately. Refill pipe, and continue placing as specified.
- .7 If tremie operation is interrupted so that horizontal construction joint has to be made, cut surface laitance by jetting, within 24 to 36 hours and remove loose material by pumping or air lifting before placing next lift.
- .8 Do not place concrete in flowing water having current exceeding 3 m/min. Do not vibrate, disturb or puddle concrete after placement.
- .5 Pumped concrete method.
 - .1 Follow procedures as for tremie method in placing concrete using discharge line from concrete pump as tremie pipe.
 - .2 Pump discharge line to have minimum diameter of 125 mm.

	METAL FABRICATIONS	Section 05 50 00
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

Section 01 33 00 - Submittal Procedures. 1.1 RELATED . 1 SECTIONS . 2 . 3 1.2 REFERENCES International, (ASTM) ASTM A 53/A53M-10, Standard . 1

- Section 01 74 21 Construction/Demolition Waste Management and Disposal.
- Section 03 30 00 Cast-in-Place Concrete.
- American Society for Testing and Materials
 - Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Steamless.
 - ASTM A 269-10, Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service.
 - ASTM A307-10, Standard Specification . 3 for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength.
 - AST-A123/A123M-09, Standard Specification for Zinc (Hot Dip Galvanized) Coatings on Iron and Steel Products.
- . 2 Canadian General Standards Board (CGSB) CAN/CGSB-1.40-97, Anti-corrosive Structural Steel Alkyd Primer. CAN/CGSB-1.181-99, Ready-Mixed, Organic Zinc-Rich Coating.
- . 3 Canadian Standards Association (CSA International)
 - CSA-G40.20/G40.21-04 (R2009), General Requirements for Rolled or Welded Structural Quality Steel/Structural Quality Steel.
 - CAN/CSA-S16.1-09, Design of Steel . 2 Structures.
 - CSA W48-06, Filler Metals and Allied Materials for Metal Arc Welding (Developed

	METAL FABRICATIONS	Section 05 50 00
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

in co-operation with the Canadian Welding Bureau).

- .4 CSA W59-03 (R2008), Welded Steel Construction (Metal Arc Welding).
- .4 The Environmental Choice Program .1 CCD-047a-98, Paints, Surface Coatings.
- .2 CCD-048-98, Surface Coatings Recycled Water-borne.

1.3 SUBMITTALS

.1 Product Data:

- .1 Submit manufacturer's printed product literature, specifications and data sheet in accordance with Section 01 33 00 Submittal Procedures.
- .2 Submit two copies of WHMIS MSDS Material Safety Data Sheets in accordance with Section 01 33 00 Submittal Procedures. Indicate VOC's:
 - .1 For finishes, coatings, primers and paints.

.2 Shop Drawings

- .1 Submit shop drawings in accordance with Section 01 33 00 Submittal Procedures.
- .2 Indicate materials, core thicknesses, finishes, connections, joints, method of anchorage, number of anchors, supports, reinforcement, details, and accessories.

1.4 QUALITY ASSURANCE

- .1 Test Reports: Certified test reports showing compliance with specified performance characteristics and physical properties.
- .2 Certificates: Product certificates signed by manufacturer certifying materials comply with specified performance characteristics and criteria and physical

	METAL FABRICATIONS	Section 05 50 00
Slipway Reconstruction Hermitage, NL		Page 3
Project Number 721935		2019-03-03

requirements.

1.5 DELIVERY, STORAGE, AND HANDLING

- .1 Packing, Shipping, Handling and Unloading:
- .2 Deliver, store, handle and protect materials in accordance with Section 01 61 00 - Common Product Requirements.
- .3 Storage and Protection:
 - .1 Cover exposed stainless steel surfaces with pressure sensitive heavy protection paper or apply strippable plastic coating, before shipping to job site.
 - .2 Leave protective covering in place until final cleaning of building. Provide instructions for removal of protective covering.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Steel sections and plates: to CAN/CSA-G40.20/G40.21, Grade 300W.
- .2 Welding materials: to CSA W59.
- .3 Welding electrodes: to CSA W48 Series.
- .4 Bolts and anchor bolts: to ASTM A 307.

2.2 FABRICATION

- .1 Fabricate work square, true, straight and accurate to required size, with joints closely fitted and properly secured.
- .2 Use self-tapping shake-proof flat headed screws on items requiring assembly by screws or as indicated.
- .3 Where possible, fit and shop assemble work, ready for erection.

		METAL FABRICATIONS	Section 05 50 00
Slipway Reconstruction Hermitage, NL			Page 4
Project Number 721935			2019-03-03
	. 4	Ensure exposed welds are of length of each joint. File exposed welds smooth and f	e or grind
2.3 FINISHES	.1	Galvanizing: hot dipped gazinc coating to ASTM-A123	_
	. 2	Shop coat primer: to CAN/C	CGSB-1.40.
	.3	Zinc primer: zinc rich, re CAN/CGSB-1.181.	eady mix to
2.4 SHOP PAINTING	 .1 Apply one shop coat of primer to metal items, with exception of galvanized or concrete encased items. .2 Use primer unadulterated, as prepared manufacturer. Paint on dry surfaces, f from rust, scale, grease. Do not paint when temperature is lower than 7 degree. 		
			y surfaces, free Do not paint
	.3	Clean surfaces to be field paint.	d welded; do not
PART 3 - EXECUTION			
3.1 ERECTION	.1	Do welding work in accordate unless specified otherwise	
	.2	Erect metalwork square, pland true, accurately fitted joints and intersections.	_
	.3	Provide suitable means of acceptable to Departmental such as dowels, anchor client expansion bolts and shield	Representative lps, bar anchors,

. 4

Exposed fastening devices to match finish

	METAL FABRICATIONS	Section 05 50 00
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03

and be compatible with material through which they pass.

- .5 Make field connections with bolts to CAN/CSA-S16.1, or weld.
- .6 Touch-up rivets, field welds, bolts and burnt or scratched surfaces after completion of erection with primer.
- .7 Touch-up galvanized surfaces with zinc rich primer where burned by field welding.

3.2 CLEANING

- .1 Perform cleaning after installation to remove construction and accumulated environmental dirt.
- .2 Upon completion of installation, remove surplus materials, rubbish, tools and equipment barriers.

	WOOD TREATMENT	Section 06 05 73
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

American Wood-Preservers' Association (AWPA) 1.1 REFERENCES . 1 AWPA M2-01, Standard Inspection of Treated Wood Products. AWPA M4-06, Standard for the Care of Preservative-Treated Wood Products. . 2 Canadian Standards Association (CSA) CSA 080 Series-97 (R2007), Wood Preservation. CSA 080.201-97, Standard for Hydrocarbon Solvents for Preservatives. This Standard covers hydrocarbon solvents for preparing solutions of preservatives. This is not stand alone specification CSA 0322-02, Procedure for Certification of Pressure-Treated Wood Materials for Use in Preserved Wood Foundations. . 1 Testing of products treated with preservative 1.2 QUALITY ASSURANCE by pressure impregnation will be carried out by the manufacturer's testing laboratory to AWPA M2, and revisions specified in CSA 080 Series, Supplementary Requirements to AWPA M2.

1.3 CERTIFICATES AND ASSAY RETENTION RESULTS

. 2

.1 Submit certificates and assay retention results in accordance with Section 01 33 00 - Submittal Procedures.

Inspection and testing of timber materials

will be carried out by the manufacturer.

- .2 For products treated with preservative by pressure impregnation submit following information certified by authorized signing officer of treatment plant:
 - .1 Information listed in AWPA M2 and revisions specified in CSA 080 Series,

WOC	D TREATMENT	Section	06	05	73
Slipway Reconstruction Hermitage, NL		Page 2			
Project Number 721935		2019-03-	-03		

Supplementary Requirement to AWPA M2 applicable to specified treatment.

- .2 Moisture content after drying following treatment with water-borne preservative.
- .3 Assay retentions results representing each treated batch of supplied timber.
- .4 Acceptable types of paint, stain, and clear finishes that may be used over treated materials to be finished after treatment.

1.4 WASTE MANAGEMENT AND DISPOSAL

- .1 Do not dispose of preservative treated wood through incineration.
- .2 Do not dispose of preservative treated wood with other materials destined for recycling or reuse.
- .3 Dispose of treated wood, end pieces, wood scraps and sawdust at sanitary landfill approved by Departmental Representative.
- .4 Dispose of unused wood preservative material at official hazardous material collections site approved by Departmental Representative.
- .5 Do not dispose of unused preservative material into sewer system, into streams, lakes, onto ground or in other location where they will pose health or environmental hazard.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Preservative: to CSA-080 Series.
- .2 Solvent: to CSA-080.201.

2.2 PRESERVATIVE TREATMENTS

.1 Treat to CSA 080, commodity standard 080.18, Table 1 and its referenced standards, with

	WOOD TREATMENT	Section 06 05 73
Slipway Reconstruction Hermitage, NL		Page 3
Project Number 721935		2019-03-03

the following minimum assay retentions:

	CCA	ACA
Species	kg/m3	kg/m3
Dimension Timber		
-Coast Douglas Fir -Western/Eastern	24	24
Hemlock	24	24
-Hemlock, Douglas Fir	10	10
-Birch or Maple	Treat to E	Refusal

Note: Birch or maple must be air dried for six (6) months in weather protected environment or kiln dried.

PART 3 - EXECUTION

3.1 FIELD TREATMENT

- .1 Handle pressure treated material in a manner that will avoid damage which may expose untreated material. Rejection of any damaged material may result and replacement will be at the Contractor's expense.
- .2 Fill all bored bolt holes with preservative immediately after boring. Use a pressurized container with hose to apply preservative, or some alternate method acceptable to the Departmental Representative.
- .3 Fill all unused bored holes and spike holes with tight fitting treated wooden plugs.

3.2 CUTTING

.1 Field cuts, if authorized, are to receive three (3) liberal coats of the applicable preservative applied to dry wood on each application.

	WOOD TREATMENT	Section 06 05 73
Slipway Reconstruction		Page 4
Hermitage, NL Project Number 721935		2019-03-03

3.3 FIELD QUALITY

- .1 Timber which contain rot, splits exposing untreated wood, excessive wane, or timbers which cannot be fastened in the work so as to be structurally sound are unacceptable.
- .2 The Departmental Representative reserves the right to carry out field testing of treated timber for penetration and retention of preservative. Timber not meeting the requirements of the specification may be rejected for use under the contract.

	JOINT SEALING	Section 07 92 10
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL		
1.1 SECTION INCLUDES	.1	Materials, preparation and application for caulking and sealants.
1.2 RELATED SECTIONS	.1	Section 01 33 00 - Submittal Procedures.
	.2	Section 01 45 00 - Testing and Quality Control.
	.3	Section 01 61 00 - Common Product Requirements.
	. 4	Section 01 74 21 - Construction/Demolition Waste Management and Disposal.
	.5	Section 03 10 00 - Concrete Forming and Accessories.
	.6	Section 03 30 00 - Cast-in-Place Concrete.
1.3 REFERENCES	.1	Canadian General Standards Board (CGSB)
	.2	CAN/CGSB-19.24-M90, Multi-component, Chemical Curing Sealing Compound.
	.3	Department of Justice Canada (Jus) .1 Canadian Environmental Protection Act,

1999 (CEPA).

- Health Canada/Workplace Hazardous Materials . 4 Information System (WHMIS) Material Safety Data Sheets (MSDS). .1
- .5 Transport Canada (TC) Transportation of Dangerous Goods Act, 1992 (TDGA).

		JOINT SEALING	Section 07 92 10
		JOINI SEALING	Section 07 92 10
Slipway Reconstruction Hermitage, NL			Page 2
Project Number 721935			2019-03-03
1.4 SUBMITTALS	.1	Submit product data in a Section 01 33 00 - Submi	
	. 2	Manufacturer's product t .1 Caulking compound2 Primers3 Sealing compound, e compatibility when differ contact with each other.	ach type, including
	.3	Submit manufacturer's in accordance with Section Of Procedures1 Instructions to incinstructions for each pr	1 33 00 - Submittal lude installation
1.5 DELIVERY, STORAGE, AND HANDLING	.1	Deliver, handle, store and in accordance with Section Product Requirements.	-
	.2	Deliver and store materi wrappings and containers seals and labels, intact freezing, moisture, wate ground or floor.	with manufacturer's . Protect from
1.6 WASTE MANAGEMENT AND DISPOSAL	.1	Separate waste materials recycling in accordance waster Construction/Demolition and Disposal.	ith Section 01 74 21
	. 2	Remove from site and dismaterials at appropriate facilities.	
	.3	Collect and separate for plastic, polystyrene, copackaging material, in a bins, for recycling in ac Management Plan.	rrugated cardboard, ppropriate on-site

.4 Place materials defined as hazardous or toxic

	JOINT SEALING	Section 07 92 10
Slipway Reconstruction		Page 3
Hermitage, NL Project Number 721935		2019-03-03

in designated containers.

- .5 Handle and dispose of hazardous materials in accordance with the CEPA, TDGA, Regional and Municipal regulations.
- .6 Unused sealant material must not be disposed of into sewer system, into streams, lakes, onto ground or in other location where it will pose health or environmental hazard.
- .7 Divert unused joint sealing material from landfill to official hazardous material collections site approved by Departmental Representative.
- .8 Empty plastic joint sealer containers are not recyclable. Do not dispose of empty containers with plastic materials destined for recycling.
- .9 Fold up metal banding, flatten, and place in designated area for recycling.

1.7 PROJECT CONDITIONS

- .1 Environmental Limitations:
 - .1 Do not proceed with installation of joint sealants under following conditions:
 - .1 When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C.
 - .2 When joint substrates are wet.
- .2 Joint-Width Conditions:
 - .1 Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.
- .3 Joint-Substrate Conditions:
 - .1 Do not proceed with installation of joint sealants until contaminants capable of

4
03-03
(

interfering with adhesion are removed from joint substrates.

1.8 ENVIRONMENTAL REQUIREMENTS

- .1 Comply with requirements of Workplace
 Hazardous Materials Information System
 (WHMIS) regarding use, handling, storage, and
 disposal of hazardous materials; and
 regarding labeling and provision of Material
 Safety Data Sheets (MSDS) acceptable to
 Labour Canada.
- .2 Conform to manufacturer's recommended temperatures, relative humidity, and substrate moisture content for application and curing of sealants including special conditions governing use.

PART 2 - PRODUCTS

2.1 SEALANT MATERIALS

.1 Where sealants are qualified with primers use only these primers.

2.2 SEALANT MATERIAL DESIGNATIONS

- .1 Polysulfide Two Part.
- .2 Self-Leveling to CAN/CGSB-19.24, Type 1, Class B, colour to match concrete.
- .3 Polysulfide Two Part.
 - .1 Non-Sag to CAN/CGSB-19.24, Type 2, Class B, colour to match concrete.
- .4 Preformed Compressible and Non-Compressible back-up materials.
 - .1 Polyethylene, Urethane, Neoprene or Vinyl Foam.
 - .1 Extruded closed cell foam backer rod.
 - .2 Size: oversize 30 to 50%.

	JOINT SEALING	Section 07 92 10
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03
	.2 Neoprene or Buty	l Rubber. rod, Shore A hardness

- .1 Round solid rod, Shore A hardness 70.
- .3 High Density Foam.
 - .1 Extruded closed cell polyvinyl chloride (PVC), extruded polyethylene, closed cell, Shore A hardness 20, tensile strength 140 to 200 kPa, extruded polyolefin foam, 32 kg/m³ density, or neoprene foam backer, size as recommended by manufacturer.
- .4 Bond Breaker Tape.
 - .1 Polyethylene bond breaker tape which will not bond to sealant.

2.3 JOINT CLEANER

- .1 Non-corrosive and non-staining type, compatible with joint forming materials and sealant recommended by sealant manufacturer.
- .2 Primer: as recommended by manufacturer.

PART 3 - EXECUTION

3.1 PROTECTION

.1 Protect installed Work of other trades from staining or contamination.

3.2 SURFACE PREPARATION

.1 Examine joint sizes and conditions to establish correct depth to width relationship for installation of backup materials and sealants.

- .2 Clean bonding joint surfaces of harmful matter substances including dust, rust, oil grease, and other matter which may impair Work.
- .3 Do not apply sealants to joint surfaces treated with sealer, curing compound, water

		JOINT SEALING	Section 07 92 10		
Slipway Reconstruction Hermitage, NL			Page 6		
Project Number 721935			2019-03-03		
		repellent, or other co have been performed to of materials. Remove c	ensure compatibility		
	. 4	Ensure joint surfaces a	re dry and frost free.		
	.5	Prepare surfaces in ac manufacturer's directi			
3.3 PRIMING	.1	Where necessary to pre adjacent surfaces prio			
		caulking.			
	. 2	Prime sides of joints sealant manufacturer's immediately prior to c	instructions		
3.4 BACKUP MATERIAL	.1	Apply bond breaker tap manufacturer's instruc	-		
	.2	Install joint filler to depth and shape, with compression.	-		
3.5 MIXING	.1	Mix materials in stric	t accordance with		
		sealant manufacturer's	instructions.		
3.6 APPLICATION	.1	Sealant1 Apply sealant in manufacturer's written .2 Mask edges of joi surface or sensitive j	instructions. nt where irregular		
		provide neat joint. .3 Apply sealant in	continuous beads.		

nozzle.

.4 Apply sealant using gun with proper size

	JOINT SEALING	Section 07 92 10
Slipway Reconstruction		Page 7
Hermitage, NL Project Number 721935		2019-03-03

- .5 Use sufficient pressure to fill voids and joints solid.
- .6 Form surface of sealant with full bead, smooth, free from ridges, wrinkles, sags, air pockets, embedded impurities.
- .7 Tool exposed surfaces before skinning begins to give slightly concave shape.
- .8 Remove excess compound promptly as work progresses and upon completion.

.2 Curing.

- .1 Cure sealants in accordance with sealant manufacturer's instructions.
- .2 Do not cover up sealants until proper curing has taken place.

.3 Cleanup.

- .1 Clean adjacent surfaces immediately and leave Work neat and clean.
- .2 Remove excess and droppings, using recommended cleaners as work progresses.
- .3 Remove masking tape after initial set of sealant.

-		
	ROCK FILL	Section 31 23 25
Clinuar Degenstmustion		Do ~ 0 1
Slipway Reconstruction		Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

. 1

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies supply and placement of rock fill beneath the slipway (to the underside of the new beams).

Include all costs in the lump sum arrangement as this section will not be measured separately for payment. Side slopes to be protected with 1 tonne rip rap where there is potential for wash-out of rock fill material.

PART 2 - PRODUCTS

2.1 ROCK FILL

- .1 Rock fill will be of hard, durable, evenly graded blasted stone having a maximum diameter of 300 mm in major portion of fill and a maximum diameter of 150 mm in upper 600 mm of rock fill. Fill material will contain not more than 6 percent by weight passing the 25 mm sieve. Rock fill to be evenly graded within the limits specified.
- .2 Use of shale rock or slate will not be permitted.

PART 3 - EXECUTION

3.1 PLACING ROCK FILL

- .1 Only rock fill material approved by Departmental Representative will be placed. Material will be placed uniformly across full cross-section in layers not exceeding 300 mm loose depth.
- .2 Use suitable earth moving and surface grading equipment to place and spread rock

	ROCK FILL	Section	31	23	25
Slipway Reconstruction		Page 2			
Hermitage, NL					
Project Number 721935		2019-03-	-03		

fill in continuous and uniform horizontal layers.

- .3 Compact rock fill after each 300 mm lift.
- .4 Place rock fill to 350 mm below bottom of finished grade.

	GEOTEXTILES	Section 31 32 21
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 SECTION INCLUDES	.1	Materials and installation of polymeric geotextiles, purpose of which is to: .1 Separate and prevent mixing of granular materials of different grading2 Act as hydraulic filters permitting passage of water while retaining soil strength of granular structure.
1.2 RELATED WORK	.1	Section 01 33 00 - Submittal Procedures.
	. 2	Section 01 74 21 - Construction/Demolition Waste Management and Disposal.
	.3	Section 31 53 13 - Timber Cribwork.
1.3 REFERENCES	.1	American Society for Testing and Materials (ASTM)

- (ASTM)
 - ASTM D4491-99a(2004)el, Standard Test Methods for Water Permeability of Geotextiles by Permittivity.
 - ASTM D4595-05, Standard Test Method for Tensile Properties of Geotextiles by the Wide-Width Strip Method.
 - ASTM D4716-04, Standard Test Method for Determining the (In-Plane) Flow Rate Per Unit Width and Hydraulic Transmissivity of a Geosynthetic Using a Constant Head.
 - ASTM D4751-04, Standard Test Method for Determining Apparent Opening Size of a Geotextile.
- . 2 Canadian General Standards Board (CGSB)
 - CAN/CGSB-4.2-M88, Textile Test . 1 Methods.
 - CAN/CGSB-148.1, Methods of Testing Geotextiles and Geomembranes.
 - No.2-M85, Mass per Unit Area.
 - No.3-M85, Thickness of Geotextiles.

		GEOTEXTILES	Section 31 32 21
Slipway Reconstruction Hermitage, NL			Page 2
Project Number 721935			2019-03-03
		Geotextiles.	rab Tensile Test for ursting Strength of No Compressive
	.3	Canadian Standards Asso. 1 CAN/CSA-G40.20-04 Requirements for Rolled Structural Quality Stee. 2 CAN/CSA-G164-M92(I Galvanizing of Irregula Articles.	/G40.21-04, General d or Welded el. R2003), Hot Dip
1.4 SAMPLES	.1	Submit samples in according 133 00 - Submittal P	
	.2	Submit to Departmental following samples at leto commencing work1 Minimum length of of geotextile.	-
1.5 MILL CERTIFICATES	.1	Submit to Departmental copy of mill test data least 2 weeks prior to	and certificate at
1.6 DELIVERY AND STORAGE	.1	During delivery and sto geotextiles from direct ultraviolet rays, exces dirt, dust, debris and	t sunlight, ssive heat, mud,
1.7 WASTE MANAGEMENT AND DISPOSAL	.1	Separate waste material recycling in accordance 01 74 21 - Construction Management And Disposal	e with Section n/Demolition Waste
	. 2	Remove from site and depackaging materials at recycling facilities.	-

	GEOTEXTILES	Section 31 32 21
Slipway Reconstruction		Page 3
Hermitage, NL Project Number 721935		2019-03-03

- .3 Collect and separate for disposal paper, plastic, polystyrene, corrugated cardboard, and packaging material, in appropriate on-site bins, for recycling in accordance with Waste Management Plan.
- .4 Fold up metal banding, flatten and place in designated area for recycling.

PART 2 - PRODUCTS

2.1 MATERIAL

- .1 Geotextile: woven or non-woven synthetic fibre fabric, supplied in rolls.
 - .1 Width: 3.5 m minimum.
 - .2 Length: 50 m minimum.
 - .3 Composed of: minimum 85% by mass of polyester with inhibitors added to base plastic to resist deterioration by ultraviolet and heat exposure.
- .2 Physical properties:
 - .1 Thickness: to CAN/CGSB-148.1, No.3, minimum 2.5 mm.
 - .2 Mass per unit area: to CAN/CGSB-148.1, No. 2, minimum 400 g/m^2 .
 - .3 Tensile strength and elongation (in any principal direction): to ASTM D4595.
 - .1 Tensile strength: minimum 1200 N, wet condition.
 - .2 Elongation at break: 50 to 100 percent.
 - .3 Seam strength: equal to or greater than tensile strength of fabric.
 - .4 Mullen burst strength: to CAN/CGSB-4.2, method 11.1, minimum 3100 kPa.
- .3 Hydraulic properties:
 - .1 Apparent opening size (AOS): to ASTM D4751, 50 to 150 micrometres.

	GEOTEXTILES	Section 31 32 21
Slipway Reconstruction		Page 4
Hermitage, NL Project Number 721935		2019-03-03

- .2 Permittivity: to ASTM D4491, 0.25 cm per second.
- .4 Securing pins and washers: to CAN/CSA-G40.21, Grade 300W, hot-dipped galvanized with minimum zinc coating of 600 g/m² to CAN/CSA G164.

PART 3 - EXECUTION

3.1 INSTALLATION

- .1 Place one (1) layer of geotextile material from base elevation of crib to top of crib and retain in position with securing pins and washers.
- .2 Place geotextile material by unrolling onto graded surface in orientation, manner and locations indicated and retain in position with securing pins and washers.
- .3 Place geotextile material on sloping surfaces in one continuous length from toe of slope to upper extent of geotextile.
- .4 Place geotextile material smooth and free of tension stress, folds, wrinkles and creases.
- .5 Overlap each successive strip of geotextile 600 mm over previously laid strip.
- .6 Join successive strips of geotextile by sewing.
- .7 Pin successive strips of geotextile with securing pins at mid point of lap to satisfaction of Departmental Representative.
- .8 Protect installed geotextile material from displacement, damage or deterioration before, during and after placement of material layers.

		GEOTEXTILES	Section 31 32 21
Slipway Reconstruction Hermitage, NL			Page 5
Project Number 721935			2019-03-03
	. 9	After installation, cover	-
		layer within 4 hours of pl	acement.
	.10	Replace damaged or deterion to approval of Departmenta Representative.	=
3.2 CLEANING	.1	Remove construction debris site and dispose of debris environmentally responsibl manner.	in an
3.3 PROTECTION	.1	Vehicular traffic not permon geotextile.	itted directly

	TIMBER CRIBWORK	Section 31 53 13
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 DESCRIPTION

.1 This section specifies requirements for supply and installation of treated timber and necessary fastenings for fabrication, placing, and ballasting of timber cribwork.

1.2 RELATED SECTIONS

- .1 Section 01 74 21 Construction/Demolition Waste Management and Disposal.
- .2 Section 06 05 73 Wood Treatment.

1.3 MEASUREMENT FOR PAYMENT

- .1 Treated Timber Cribwork Work Area A: to be measured in cubic metres (m³) of completed work which includes ballast, treated timber, fastenings, and all plant, labour, materials and equipment to perform work.
- .2 Measure timber cribwork in cubic metres determined by product. Use following dimensions measured in place:
 - .1 Height: average of measurements taken at each vertical from bottom of lowest timber to top side of uppermost course of timber.
 - .2 Width: average of measurements between outside faces of exterior longitudinal timbers, each width measured on top tiers of each row of cross ties.
 - .3 Length: measured horizontally along centre-line of crib between outside faces of exterior cross ties.
- .3 Measurements of the vertical lengths, widths and lengths of cribwork, will be taken in the presence of both the Contractor and the Departmental Representative and will be verified and

	TIMBER CRIBWORK	Section 31 53 13
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03

signed by both parties on the site to avoid any disputes.

1.4 SAFETY REQUIREMENTS

.1 Worker protection:

- .1 Workers must wear gloves, respirators, dust masks, long sleeved clothing, eye protection, protective clothing when handling, drilling, sawing, cutting or sanding preservative treated wood and applying preservative materials.
- .2 Workers must not eat, drink or smoke while applying preservative material.
- .3 Clean up spills of preservative materials immediately with absorbent material. Safely discard of absorbent material to sanitary landfill.

1.5 REFERENCES

- .1 American Society for Testing and Materials
 (ASTM International)
 - .1 ASTM A307-07b, Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile.
 - .2 ASTM C136-06, Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates.
- .2 American Wood-Preserver's Association (AWPA)
 - .1 AWPA M4-06, Standard for the Care of Preservation Treated Wood Products.
- .3 Canadian Standards Association (CSA International)
 - .1 CSA B111-1974(R2003), Wire Nails, Spikes and Staples.
 - .2 CAN/CSA-G40.21-04, General Requirements for Rolled or Welded Structural Quality Steel/Structural Steel.
 - .3 CAN/CSA G164-M92(R2003), Hot Dip Galvanizing of Irregularly Shaped Articles.

	TIMBER CRIBWORK	Section 31 53 13
Slipway Reconstruction Hermitage, NL		Page 3
Project Number 721935		2019-03-03

- .4 CAN/CSA-080 Series-97 (R2007), Wood Preservation.
- .4 Canadian Wood Council
 - .1 Wood Design Manual.
- .5 National Lumber Grades Authority (NLGA)
 .1 Standard Grading Rules for Canadian
 Lumber 2000 edition.

1.6 SUBMITTALS

.1 Ballast:

.1 Submit proposed placing method to Departmental Representative for approval, prior to placing of ballast.

1.7 WASTE MANAGEMENT

- .1 Remove from site and dispose of packaging materials at appropriate recycling facilities.
- .2 Dispose of all corrugated cardboard and polystyrene plastic packaging material in appropriate on-site bin for recycling.
- .3 Place materials defined as hazardous or toxic in designated containers.
- .4 Ensure emptied containers are sealed and stored safely.
- .5 Do not dispose of preservative treated wood through incineration.
- .6 Do not dispose of preservative treated wood with other materials destined for recycling or reuse.
- .7 Dispose of treated wood, end pieces, wood scraps and sawdust at a sanitary landfill.
- .8 Dispose of unused preservative material at an official hazardous material collections site. Do not dispose of unused

	TIMBER CRIBWORK	Section 31 53 13
Slipway Reconstruction Hermitage, NL		Page 4
Project Number 721935		2019-03-03

preservative material into sewer system, streams, lakes, on ground or in any other location where they will pose a health or environmental hazard.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Timber: Use timber graded and stamped in accordance with applicable grading rules and standards of associations or agencies approved to grade lumber by Canadian Lumber Standards Accreditation Board of CSA.
- .2 Species: Douglas Fir, Pacific Coast Hemlock and Eastern Hemlock.
- .3 Grade: No. 1 Structural.
- .4 Grading authority: NLGA.
- .5 Preservative treatment: To CSA 080 for coastal waters and Section 06 05 73 Wood Treatment. Supply timbers in lengths required. Cut and field treat timbers only as may be necessary to suit site conditions. Contractor will have on site sufficient lengths and thickness of treated timber to permit leveling of cribs after ballasting operations.
- .6 Miscellaneous steel: Medium structural steel conforming to CSA Specification G40.21 "Structural Quality Steels".
 - .1 Hot dip galvanized: to CAN/CSA-G164. Minimum weight of zinc coating as stated in Table 1 of this Standard. Fabricator to adhere to recommendations in Appendix A and B of Standard.
 - .2 Wire nails, spikes, staples: to CSA-B111.
 - .3 Bolts, nuts, washers: to ASTM A307.

	TIMBER CRIBWORK	Section 31 53 13
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03

- .4 Drift Bolts: to G40.21 from round stock, button head and diamond or wedge point.
- .5 Washers:
 - .1 Round Plate Washers: for 19 mm diameter machine bolts, 79 mm diameter by 7.9 mm thick, with hole diameter of 21 mm. Washers to G40.21.
 - .2 Square washers not permitted to be used.
- .6 All hardware galvanized.

PART 3 - EXECUTION

3.1 PREPARATION

- .1 Excavate area of crib base as indicated on drawings.
- .2 Contractor to confirm with Departmental Representative that excavated cribseat is adequate for placement of cribwork.
- .3 Before construction, stockpile sufficient ballast to completely fill cribs. Provide suitable plant and equipment to keep crib in proper position and alignment during sinking operations.
- .4 Cribs out of alignment or not correctly located to be refloated and replaced in correct position.

3.2 CRIB CONSTRUCTION

.1 Levelling Pieces:

- .1 Place treated timber levelling pieces beneath bottom timbers to conform to shape of base area.
- .2 Place levelling pieces horizontally.
- .3 Secure succeeding pieces at intersections of bottom timbers and vertical posts, and other levelling pieces with machine bolts.

	TIMBER CRIBWORK	ζ	Section 31 53 13
Slipway Reconstruction			Page 6
Hermitage, NL Project Number 721935			2019-03-03

.2 Bottom timbers:

- .1 Place bottom timbers lengthwise, and crosswise to form bottom three courses of cribs.
- .2 Crosswise bottom timbers to be of one piece.
- .3 Lengthwise bottom timbers to be of one piece.
- .4 Secure three courses of bottom timbers together with machine bolts at every intersection with each other and with vertical posts.

.3 Ballast floor:

- .1 Place ballast floor as shown on drawings.
- .2 Secure each ballast floor timber to bottom timbers with drift bolts securing adjacent ballast floor timbers to same bottom timber.

.4 Longitudinals:

- .1 Longitudinals one length for individual cribs.
- .2 Where cribs are married together, longitudinals of sufficient length to span a minimum of a half a bay of one crib and one and a half bays of the adjacent crib.
- .3 Butt join exterior and interior longitudinals a minimum distance of 600 mm from crosstie with joint in centre of a 1200 mm long joiner block.
- .4 Secure block to lower timber with drift bolt at centre and secure longitudinals and splice at ends to block with drift bolts.
- .5 Stagger joints in longitudinal timbers. Do not join in same bay or on same vertical post.
- .6 Secure longitudinals to intersection of cross ties with drift bolt and to intersection of vertical posts with machine bolt every third course of

	TIMBER C	RIBWORK	Section 31	L 53 13
Slipway Reconstruction			Page 7	
Hermitage, NL Project Number 721935			2019-03-03	3

- longitudinals, along with the top course.
- .7 Countersink machine bolts on exterior face above LNT.
- .5 Cross ties: one length across cribs.

 .1 Secure cross ties to intersection of longitudinals with drift bolt and to intersection of vertical posts with machine bolt every third course of cross tie, along with the top course.

 .2 One row of crossties and verticals may be eliminated from one crib where cribs marry together above +400 mm LNT.
- .6 Vertical posts: one length from bottom of cribwork to top of cribwork. Locate one vertical post at corner of each crib and at intersection of crossties with longitudinals.
- .7 Blocking: install treated timber filler blocking as indicated on drawings.
- .8 Levelling: treated timber required for levelling of cribwork after ballasting, must be full width continuous over entire length to be levelled.
- .9 Bolt Sizing and Holing:
 - .1 Drift Bolts: length of drift bolts equal to thickness of timbers fastened less 50 mm, unless otherwise specified. Bore holes for drift bolts 2 mm smaller diameter than bolt and for full length of bolt.
 - .2 Machine Bolts: length of machine bolts equal to thickness of timbers fastened plus thickness of washers plus 40 m. Where bolts are countersunk, the length, as noted above, less depth of countersink. Thread machine bolts for 64 mm. Bore holes for machine bolts to same diameter as bolts.

		TIMBER CRIBWORK	Section 31 53 13	
Slipway Reconstruction Hermitage, NL			Page 8	
Project Number 721935			2019-03-03	
3.3 HANDLING TREATED TIMBER		Handle treated material woriginal treatment1 Replace treated timbedamage to original treatminstructed by Departmenta	er with major ent, as	
	. 2	Field treatment: to CAN/CSA-080. Apply and saturate cuts, minor surface damage, abrasions, and nail and spike holes with preservative.		
	.3	Ripping of treated timber not permitted without prior approval of Departmental Representative.		
3.4 BALLAST	.1	Place ballast to ensure t not damaged.	hat cribwork is	
	.1	1 in 300 in overall dimen	sions.	
	. 2	Locate cribs within 100 m indicated. Horizontal mis 100 mm along the outside	alignment within	
	.3	Space between ballasted of 200 mm. No payment for the made above or below LNT.		
3.6 PROTECTION	.1	Protect work from damage work on other sections an resulting from environmen	d from damage	
	. 2	Repair or replace portion at no additional cost if		

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction Hermitage, NL		Page 1
Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 DESCRIPTION

- .1 This section specifies requirements for supply and installation of structural timber as follows:
 - .1 Supply and installation of treated dimension timber wheelguard, wheelguard blocking, posts, caps, railings, bracing, beams and runners.
 - .2 Supply and installation of treated dimension timber decking.

1.2 REFERENCES

- .1 American Society for Testing and Materials
 (ASTM International)
 - .1 ASTM A307-07b, Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile.
- .2 American Wood-Preserver's Association (AWPA) .1 AWPA M4-06, Standard for the Care of Preservation - Treated Wood Products.
- .3 Canadian Standards Association (CSA International)
 - .1 CSA B111-1974(R2003), Wire Nails, Spikes and Staples.
 - .2 CAN/CSA-G40.21-04, General Requirements for Rolled or Welded Structural Quality Steel/Structural Steel.
 - .3 CAN/CSA G164-M92(R2003), Hot Dip Galvanizing of Irregularly Shaped Articles.
 - .4 CAN/CSA-080 Series-97 (R2007), Wood Preservation.
- .4 Canadian Wood Council
 - .1 Wood Design Manual.
- .5 National Lumber Grades Authority (NLGA).1 Standard Grading Rules for CanadianLumber 2000 edition.

1.3 DIMENSIONS

.1 Check existing site dimensions and report

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction Hermitage, NL		Page 2
Project Number 721935		2019-03-03

discrepancies to Departmental Representative before commencing work.

1.4 PROTECTION

- .1 Avoid dropping, bruising or breaking of wood fibres.
- .2 Avoid breaking surfaces of treated timber.
- .3 Do not damage surfaces of treated timber by boring holes or driving nails or spikes into them to support temporary material or staging.
- .4 Treat cuts, breaks or abrasions on surfaces of treated timber with 3 brush coats of preservative to CSA 080.
- .5 Treat bolt holes, cutoffs and field cuts in accordance with CSA 080.

1.5 MEASUREMENT FOR PAYMENT

.1 Structural Timber:

- Treated Dimension Timber Work Area A:
 The supply and installation of treated
 dimension timber for wheelguard, wheelguard
 blocking, posts, support blocking at bottom
 of posts, caps, beams and runners will be
 measured by the cubic metre (m³) of timber
 secured in place, including all timber,
 fastenings, plant, material, equipment,
 labour, wheelguard bolt hole levelling
 sealant, painting of wheelguard and
 wheelguard blocking.
- .2 Treated Timber Decking Work Area A: The supply and installation of treated timber decking for the slipway will be measured by the cubic metre (m^3) of timber secured in place. Contractor will provide all timber, fastenings, plant, material, equipment, and labour.

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction		Page 3
Hermitage, NL		
Project Number 721935		2019-03-03

- .3 Treated Dimension Timber Work Area B: The supply and installation of treated dimension timber for caps, beams, bracing and railings will be measured by the cubic metre (m³) of timber secured in place, including all timber, fastenings, plant, material, equipment and labour.
- .4 Treated Timber Decking Work Area B: The supply and installation of treated timber decking for the boardwalk will be measured by the cubic metre (m³) of timber secured in place. Contractor will provide all timber, fastenings, plant, material, equipment, and labour.
- .2 Payment for all dimension timber will be made on volume calculated from nominal sizes as indicated on drawing and specified, eg. 200 mm x 200 mm. Order timbers in lengths to minimize the amount of splicing (splice blocks will not be measured for payment).

PART 2 - PRODUCTS

2.1 TIMBER MATERIALS

- .1 Timber: Use timber graded and stamped in accordance with applicable grading rules and standards of associations or agencies approved to grade lumber by Canadian Lumber Standards Administration Board of CSA.
- .2 Species
 - .1 Wheelguard, wheelguard blocks, posts, cpas, beams, support blocking at base of posts, runners, bracing and railing: Hemlock or Douglas Fir (CCA or ACA treated).
 - .2 Decking: Hemlock (CCA or ACA treated).
- .3 Grade: No. 1 Structural Grade.
- .4 Grading Authority: NLGA
- .5 Preservative Treatment: Treat to CSA 080, for

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction		Page 4
Hermitage, NL Project Number 721935		2019-03-03

coastal waters and Section 06 05 73. Timbers will be treated in the lengths required. Unnecessary field cutting will not be permitted.

- .6 Primer: Alkyd undercoat, exterior oil wood primer, similar to Pittsburgh 6-9.
- .7 Paint: Alkyd/Oil Resin paint similar to Pittsburgh Paints "Safety Yellow" Product ID 7-808. Paint to conform to CAN/CGSB-1.61-2004.

2.2 MISCELLANEOUS STEEL AND FASTENINGS

- .1 Miscellaneous Steel: All steel and fastenings to be CSA G40.21, Grade 300 W, galvanized.
- .2 Nails and Spikes: to CSA B111.
- .3 Machine Bolts and Nuts: to ASTM A307. All machine bolts and nuts to be galvanized.
- .4 Drift Bolts: to G40.21 from round stock button head and diamond or wedge point. All drift bolts to be galvanized.
- .5 Washers:
 - .1 Round Plate Washers: for 16 mm machine bolts will be 76 mm diameter by 6.4 mm thick, for 19 mm machine bolts will be 79 mm diameter by 7.9 mm thick and have a hole diameter of 18 mm and 21 mm diameter respectively. Washers to conform to G40.21. All washers to be galvanized.
 - .2 Plain Washers: to CSA B19.1, Class 2. All washers to be galvanized.
 - .3 Square washers are not permitted.
- .6 Galvanizing: will conform to CSA G164 "Hot Dip Galvanizing of Irregularly Shaped Articles." Unless otherwise specified, minimum weight of zinc coating will be as stated in Table 1 of this standard. Fabricator is to adhere to recommendations of Appendix A and Appendix B of standard.

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction Hermitage, NL		Page 5
Project Number 721935		2019-03-03

.7 Welding in accordance with CSA Standards. The welders will be qualified to the appropriate classification as stated in CSA W47.1 "Certification of Companies for Fusion Welding of Steel Structures." Conform welding to all appropriate requirements and recommendations of CSA Standard W59 "Welded Steel Construction" (metal arc welding).

PART 3 - EXECUTION

3.1 PREPARATION

.1 Install structural timbers to details shown on drawings or as specified.

3.2 WHEELGUARD AND WHEELGUARD BLOCKING

- .1 Wheelguard timbers to be 200 mm x 200 mm, and will be in minimum lengths of 6100 mm or as specially required with butt joints made over wheelguard blocking. Wheelguard timbers to be chamfered on top, 25 mm on each horizontal and vertical surface.
- .2 Wheelguard blocks will be installed at 1500 mm on centre as support for wheelguard.
- .3 Wheelguard for the slipway will be secured through wheelguard blocking, and into end beams as shown on the drawings. Wheelguard for launchway will be attached to concrete as shown on the drawings.

3.3 POSTS/BRACING AND RAILING

.1 Install treated timber posts, bracing and railings as shown on drawings.

3.4 CAPS

.1 Caps are to be in one complete length for each row. Refer to drawings for details.

		STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction Hermitage, NL			Page 6
Project Number 721935			2019-03-03
3.5 BEAMS	.1	Install timber beams as s or as indicated.	hown on the drawings
	. 2	Secure beams to every sudrawings.	pport as shown on
3.6 DECKING	.1	Install timber deck planthickness of 75 mm to despecified.	_
	. 2	Deck planks to be laid at beams.	right angles to deck
	.3	Deck planks to be in widt cross structure in no mo lengths unless otherwise in adjacent planks will same beam.	re than two (2) specified. Joints
3.7 RUNNERS	.1	Install runners at right Installation is as per t	_
3.8 PAINTING	.1	Paint wheelguard and whe directed by the Departmer	_
	.2	Use one (1) coat of externand two (2) coats of alk as specified. Paint mate to be product of a singl specified. Ensure previous paint is dry before second	yd/oil resin paint rials for each coat e manufacturer as us coat of primer or
3.9 BOLT SIZING	.1	Drift Bolts: Drift bolts thave a length equal to the being fastened less 50 m specified. Holes for drift 2 mm smaller diameter that	hickness of timbers m unless otherwise t bolts will be bored

and for full length of bolts.

	STRUCTURAL TIMBER	Section 31 53 16
Slipway Reconstruction Hermitage, NL		Page 7
Project Number 721935		2019-03-03

- .2 Machine Bolts: Machine bolts used in work will have a length equal to thickness of timbers being fastened plus thickness of washers plus 40 mm. Where bolts are countersunk, the length will be as above less depth of countersinking. Machine bolts will be threaded for 64 mm. Holes will be drilled same diameter as bolt.
- .3 Lag Screws: All lag screws used in the work will have a length equal to thickness of timbers being fastened less 50 mm and depth of countersinking. Holes for lag screws to be drilled same diameter as shank portion of screw and to inside thread diameter for threaded portion of screw and for full length. All lag screws will be countersunk, screwed, not driven in place, and will have one (1) standard washer under the head.
- .4 Countersink lag screws in areas noted on the drawings, to the extent that the minimum distance from face of timber to head of bolt is 12 mm.
- .5 Bolting of timbers without properly drilled bolt holes will not be accepted.

	PILE FOUNDATIONS, GENERAL REQUIREMENTS	Section 31 61 13
Slipway Reconstruction	~	Page 1
Hermitage, NL		
Project Number 721935		2019-03-03

PART 1 - GENERAL

- 1.1 RELATED WORK .1 Section 31 62 19 Timber Piles.
- 1.2 DELIVERY, STORAGE .1 Protect piles from damage due to excessive bending stresses, impact, abrasion or other causes during delivery, storage and handling.
 - .2 Replace damaged piles to satisfaction of Departmental Representative.
- 1.3 SCHEDULING

 .1 Submit schedule of planned sequence of driving to Departmental Representative for review, not less than 2 weeks prior to commencement of pile driving.

PART 2 - PRODUCTS

2.1 MATERIALS

- .1 Material requirements for piles are specified in Section 31 62 19.
- .2 Supply or fabricate full length piles as indicated and provide equipment to handle full length piles without cutting and splicing.
- .3 Do not splice piles without written permission of Departmental Representative. When permitted, provide details for Departmental Representative's review. Design details of splice to bear dated signature stamp of professional engineer registered or licensed in province of

	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

Newfoundland and Labrador.

PART 3 - EXECUTION

3.1 EQUIPMENT

.1 Prior to commencement of pile
 installation, submit to Departmental
 Representative for review, details of
 equipment for installation of piles.
 .1 Impact hammers: give manufacturer's
 name, type, rated energy per blow at
 normal working rate, mass of striking
 parts of hammer, mass of driving cap and
 type and elastic properties of hammer and
 pile cushions.

.2 Hammer:

- .1 Hammers to be selected on basis of driveability analysis using wave equation theory, performed to show that piles can be driven to levels indicated.
- .2 The driveability analysis shall include, but not be limited to, the following: hammer, cushion, and capblock details; static soil parameters; quake and damping factors, total soil resistance, blow count, pile stresses and energy throughput at representative penetrations.
- .3 Driveability analysis to be submitted to the Departmental Representative for approval of the hammer or hammers.
- .4 When required criteria can not be achieved with the proposed hammer, use larger hammer and take other measures as required.

.3 Leads:

.1 Construct pile driver leads to provide free movement of hammer. Hold leads in position at top and bottom, with guys, stiff braces, or other means approved by Departmental Representative to ensure support to pile while being driven. Performance of the leads will be subject

PILE FOUNDATIONS, GENERAL REQUIREMEN	
Slipway Reconstruction Hermitage, NL	Page 3
Project Number 721935	2019-03-03

to assessment of Departmental Representative. Any remedial action required will be at the Contractor's own expense.

.4 Follower:

- .1 Follower must be used for driving of all piles.
- .2 Provide follower with dynamic impedance (EA/c) equal to that of pile and of shape and length enabling driving of pile in specified location to required depth and resistance. Provide follower with socket or hood carefully fitted to the pile head to minimize loss of energy and prevent damage to pile.
- .3 Where follower is to be used, drive applicable test piles using similar follower.
- .4 Proper design and performance of follower will be subject to the assessment of Departmental Representative.

3.2 PREPARATION

.1 Ensure that ground conditions at the pile locations are adequate to support pile driving. Make provision for access and support of piling equipment during performance of work.

3.2 FIELD MEASUREMENTS

- .1 Maintain accurate and daily records of
 driving for each pile, including:
 - .1 Type and make of hammer, rated energy, observed stroke, and observed blows per minute.
 - .2 Other installation equipment including details on use of pile cushion, follower, and water jet.
 - .3 Pile size and length, location of pile in pile group, and location or designation of pile group.
 - .4 Time for start and finish of driving pile and sequence of pile driving for piles in group.

	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 4
Hermitage, NL		
Project Number 721935		2019-03-03

- .5 Penetration for own weight and own weight and weight of hammer, number of blows per 300 mm of penetration from start of driving and penetration for four (4) consecutive series of blows when approaching termination of driving of pile.
- .6 Toe elevation upon termination of driving pile and final toe and cut-off elevations upon completion of pile group.
- .7 For open-toe pipe piles, record length from ground surface outside pile to soil surface inside pipe.
- .8 Records of restriking.
- .9 Result of inspection of pile by means of inspection probe.
- .10 Other pertinent information, such as interruption of continuous driving, observed pile damage, etc.
- .11 Records of elevations of adjacent piles before and after driving of pile.
- .12 Record all information on forms provided by Departmental Representative.
- .2 Provide Departmental Representative with three (3) copies of the records.

3.3 PILE INSTALLATION .1 Use driving helmet to protect pile head.

- .2 Hold pile securely and accurately in position while driving.
- .3 Deliver hammer impacts concentrically and in direct alignment with pile taking care to avoid forcing pile laterally or bending pile.
- .4 Reinforce pile heads, if necessary.
- .5 Advance all piles to full supply length with top elevation as shown on drawings. If piles cannot be driven to full supply length, driving the piles to a penetration resistance as specified in Clause 3.9 may

		G
	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 5
Hermitage, NL		
Project Number 721935		2019-03-03

be accepted by the Departmental Representative.

- .6 Exercise care when driving piles adjacent to existing structures to ensure that no contact between pile and structure takes place.
- .7 Restrike piles which have settled or heaved during driving of adjacent piles. No additional compensation will be made for pile restruck due to such settlement of heave.
- .8 Restrike piles as directed by Departmental Representative.
- .9 Cut-off of piles shall be accepted only where approved by Departmental Representative. Cut-off piles neatly and squarely at elevations indicated.

AND/OR TEMPLATES

- 3.4 TEMPORARY BRACING .1 Provide bracing and/or templates necessary for bracing and/or installation of piles.
 - .2 Bracing and/or templates must be capable of providing the necessary support to piles during initial installation and restriking operations.
 - .3 Remove temporary bracing and templates upon completion of work.
 - .4 Plant, labour, equipment, material, and supervision costs related to providing temporary bracing and/or templates are incidental to the piling work and no additional compensation will be made.

3.5 OBSTRUCTION

.1 Where obstruction is encountered that results in a sudden, unexpected change in penetration resistance and deviation from

	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 6
Hermitage, NL		
Project Number 721935		2019-03-03

specified tolerances, the Contractor may be required to perform one or all of the following:

- .1 Removal of obstruction.
- .2 Extraction, repositioning and redriving.
- .3 Addition of extra piles.
- .2 If in the opinion of Departmental
 Representative work done as per Clause 3.5.1
 could not have been reasonably anticipated
 by the Contractor, additional compensation
 for work done will be considered for
 payment.

3.6 JETTING

- .1 Use water jetting only with authorization/permission of Departmental Representative.
- .2 When water jetting is authorized/permitted, the jetting system used must be sufficient to freely erode and remove the soil material immediately adjacent to the pile without creating a crater around pile causing it to drift.
- .3 Submit all details of jetting including plant description, the number and size of jet nozzles, volume and pressure of water, and size and length of water hoses and pipes to Departmental Representative for approval.
- .4 Restriction: stop jetting at a minimum of 1 metre above expected final toe elevation and at a minimum of 1 metre above the toe elevation of piles previously driven within 2 metres of jetted pile, except where piles are carried to bedrock. Drive piles down beyond depth of jetting until required penetration resistance is obtained. If there is evidence that jetting has disturbed previously installed piles, restore capacity of those piles by restriking. Restrike for verification where necessary after jetting operations in area have been completed. No

	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 7
Hermitage, NL		
Project Number 721935		2019-03-03

additional compensation will be made.

3.7 WORKING LOAD

.1 All piles are to be driven minimum of 3m into the bottom. If the piles cannot be driven to the full supply length without damage, the Departmental Representative will consider an acceptable pile driving resistance. The Contractor is to note that the required working load of each pile is 175 kilonewtons.

RESISTANCE

- 3.8 FINAL PENETRATION .1 Installation of each pile will be subject to approval of Departmental Representative, who will be sole judge of acceptability of pile with respect to final penetration resistance, depth of penetration, or other criteria. If the piles cannot be driven to full supply length, the Departmental Representative will approve final penetration resistance of all piles prior to removal of pile driving equipment from site.
 - .2 If the piles cannot be driven to full supply length, drive piles to a final penetration such that a minimum count of 30 is achieved. The four (4) final consecutive penetrations of 150 mm, should be recorded and provided to the Departmental Representative. Alternatively, a penetration resistance of at least 200 blows for a penetration smaller than 300 mm, or to a penetration smaller than 25 mm for two (2) consecutive series of 50 blows, (whichever occurs first) shall also be considered acceptable. Prior to taking final penetration resistance, drive piles without interruption for a sufficient interval to break or prevent development of soil set-up. When required by Departmental Representative, restrike. No additional compensation will be made for restriking.

3.9 TOLERANCES

.1 Pile, at design elevation, to be no more than 2 % of length out of alignment.

	PILE FOUNDATIONS,	Section 31 61 13
	GENERAL REQUIREMENTS	
Slipway Reconstruction		Page 8
Hermitage, NL		
Project Number 721935		2019-03-03

.2 If in the opinion of Departmental
Representative piles are placed beyond
tolerances specified, the Contractor may be
required to remove such piles and install
new piles to the specified tolerances at his
own expense.

3.10 DAMAGED OR DEFECTIVE PILE

- .1 Departmental Representative will reject any pile found to be defective or damaged.
- .2 Remove rejected pile and replace with a new and if necessary, longer pile, as directed by the Departmental Representative.
- .3 Remove rejected pile and fill hole as directed by Departmental Representative.
- .4 Leave rejected pile in place and cut off as directed by Departmental Representative.
- .5 Leave rejected pile in place and place adjacent pile as directed by Departmental Representative.
- .6 No extra compensation will be made for removing and replacing or other work made necessary through rejection of a defective pile.

	TIMBER PILES	Section 31 62 19
Slipway Reconstruction		Page 1
Hermitage, NL Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 DESCRIPTION

.1 This section specifies requirements for supply and installation of new timber piles.

1.2 RELATED WORK

- .1 Section 31 61 13 Pile Foundations, General.
- .2 Section 06 05 73 Wood Treatment.

1.3 PROTECTION

- .1 Avoid dropping, bruising or breaking of wood fibres.
- .2 Avoid breaking surfaces of treated piles.
- .3 Do not damage surfaces of treated piles below cut-off elevation by boring holes or driving nails or spikes into them to support temporary material or staging. Staging may be supported in rope slings carried over tops of piles or attached to pile clamps of approved design.
- .4 Treat cuts, breaks or abrasions on surfaces of treated piles, bolt holes, cut-offs and field cuts in accordance with CSA 080.

1.4 MEASUREMENT FOR PAYMENT

.1 Treated Timber Piles - Work Area B: Timber piles acceptably driven and secured in the work will be measured by the unit. Include cut-offs, protection of pile tops, pile shoes, hardware, preservative treatment and all equipment, material and labour.

PART 2 - PRODUCTS

	TIMBER PILES	Section 31 62 19
Slipway Reconstruction		Page 2
Hermitage, NL Project Number 721935		2019-03-03

2.1 TIMBER PILES

- .1 Round timber piles: to CAN3-056, latest edition, clean peeled piles with the following dimensions:
 - .1 Diameter (mm): 300 at pile cap elevation.
 - .2 Length (m): Supply in full lengths ensuring a minimum of 3m penetration into the existing bottom.

Note that the minimum diameter of the pile at the underside of the new pile cap support elevation is to be 300mm. Any piles not meeting this minimum requirement will be rejected. Do not arbitrarily order a typical 300mm diameter (imperial size 12) pile in this regard.

- .2 Species: Red Pine, or approved equal.
- .3 Preservative Treatment: to CSA 080 and commodity standard 080.18.

2.2 MISCELLANEOUS MATERIALS

- .1 Wire nails, spikes, staples to CSA B111.
- .2 Bolts, nuts and washers to ASTM A307.
- .3 Items manufactured or fabricated from scrap steel of unknown chemical composition or physical properties are not acceptable.
- .4 Hot dip galvanized bolts, nuts and washers to CSA G164 and unless otherwise specified, spikes and nails and miscellaneous hardware to ASTM A123.

PART 3 - EXECUTION

3.1 PREPARATION

.1 Protect pile heads during driving and hold in position by using a combination cushion - driving head and pilot. Closely fit driving heads to top of pile and extend down sides of pile for at least 75 mm.

Where necessary protect pile head by means

	TIMBER PILES	Section 31 62 19
Slipway Reconstruction		Page 3
Hermitage, NL Project Number 721935		2019-03-03

of heavy steel straps or wrought iron rings. Protect adjacent piles from damage.

3.2 PILE INSTALLATION .1

- 1 Do pile installation work in accordance with Section 31 61 13.
- .2 Provide sufficient length above cut-off elevation so that part damaged during driving is cut-off. Cut-off piles neatly and squarely at elevations indicated.
- .3 Treat exposed ends of cut-off piles with two (2) liberally brushed coats of preservative, allowing sufficient interval between applications to permit total absorption.
- .4 Remove cut-off lengths from site on completion of work.

	GRANULAR BASE COURSES	Section 32 11 23
Slipway Reconstruction		Page 1
Hermitage, NL Project Number 721935		2019-03-03

PART 1 - GENERAL

1.1 DESCRIPTION

.1 This section specifies the requirements for the supplying, producing and placing crushed gravel for quarried stone as a granular base course to lines, grades and typical cross sections indicated, or as directed by Departmental Representative. Granular base courses will not be measured separately for payment and is to be included in the lump sum.

1.2 REFERENCES

- .1 ASTM C117-04, Standard Test method for material finer than 0.075 mm sieve in mineral aggregates by washing.
- .2 ASTM C131-06. Standard Test method for resistance to degradation of small size coarse aggregate by abrasion and impact in the Los Angeles machine.
- .3 ASTM C136-06, Standard Method for sieve analysis of fine and coarse aggregates.
- .4 CAN/CGSB-8.2-M88, Sieves testing, woven wire, metric.

1.3 DELIVERY, STORAGE .1 AND HANDLING

1 Deliver and stockpile aggregates as directed by Departmental Representative.

PART 2 - PRODUCTS

2.1 MATERIALS

.1 Granular base fill (Class "A") will consist of clean, hard, durable crushed gravel or stone, free from shale, clay, friable materials, organic matter and other deleterious substances and graded within the following limits when tested to ASTM C136 and ASTM C117 and giving a smooth curve without sharp breaks when plotted on a semi-chart.

	GRANULAR BASE COURSES	Section 32 11 23
Slipway Reconstruction		Page 2
Hermitage, NL		
Project Number 721935		2019-03-03

ASTM Sieve Designation	% Passing
19.0 mm	100
9.51 mm	50 - 80
4.76 mm	35 - 60
1.20 mm	15 - 35
300 um	7 - 20
75 um	3 - 6 (Pit Source)
	3 - 8 (Rock Source)

- .2 Physical Requirements for Class "A":
 - .1 Liquid Limit ASTM D4318: Maximum 25
 - .2 Plasticity Index ASTM D4318: Maximum 0
 - .3 Los Angeles Abrasion ASTM C131-81 Maximum % loss by weight: 35
 - Crushed Fragments: 50%. The percent of crushed particles will be determined by examining the fraction retained on the 4.76mm sieve and dividing the weight of the crushed particles by the total weight retained on the 4.76 mm sieve.
 - .5 CBR: ASSHTO T193-72 Min 100 when compacted to 100% of AASHTO T180-74 Method D.
- .3 Materials from deposits acceptable as to the quality of the particles, but deficient in sizes to provide the required gradation, may be accepted if the contractor furnishes and satisfactorily incorporates into the product supplementary sizes from other sources to produce the required grading. If the deficiencies occur in Class "A" materials, corrections may be attempted by crushing to a smaller maximum particle size. In that event, the Departmental Representative will furnish special grading limits on the actual maximum particle size.
- .4 Material shall be considered unsuitable even though particle sizes are within the specified gradation limits if particle shape or any other characteristic precludes satisfactory compaction or fails to provide a roadway suitable for traffic. If, in the

	GRANULAR BASE COURSES	Section 32 11 23
Slipway Reconstruction		Page 3
Hermitage, NL Project Number 721935		2019-03-03

opinion of the Departmental Representative, an improved particle shape can be achieved by using a different crushing unit for that proposed by the contractor, then the Contractor shall supply and use a crushing unit of the type directed by the Departmental Representative.

.5 Class "A" shall be processed by crushing and, when necessary, to eliminate surplus fines passing the 4.76 mm sieve, shall be screened and washed.

PART 3 - EXECUTION

3.1 INSTALLATION

.1 Place granular base after sub-base surface is inspected and approved by Departmental Representative.

.2 Placing:

- .1 Construct granular base to depth and grade in area indicated.
- .2 Ensure no frozen material is placed.
- 3 Place material only on clean unfrozen surface, free from snow and ice.
- description 14. The contractor shall place all granular bases in such a manner as to prevent contamination by other materials and to prevent segregation. If, in the opinion of the Departmental Representative, the methods and techniques used by the Contractor cannot overcome contamination or segregation, then the Departmental Representative may direct a modification in these methods which may require the use of an approved spreader box or other acceptable device.
- .5 All granular bases shall be placed in uniform layers such that the thickness of the compacted layer does not exceed 50 mm.
- .6 Prior to closing down operations for each working day, all granular materials shall be bladed and compacted to the specified density.

	GRANULAR BASE COURSES	Section 32 11 23
Slipway Reconstruction Hermitage, NL		Page 4
Project Number 721935		2019-03-03

- .7 The materials shall be sprayed with water when and as directed by the Departmental Representative, either to aid compaction or reduce dust nuisance or both. When water is added to aid compaction, it shall be applied immediately ahead of the compacting unit
- Each layer of granular base shall be bladed shaped and compacted as necessary to produce the required profile and cross-The finished surface shall not section. deviate at any place on a 3 m straight edge by more than 10mm for Class "A". upper layer shall be maintained to these tolerances and to the specified density until compaction of the contract. may require keeping the moisture content at the appropriate value during periods of dry weather in addition to regarding and re-compacting as frequently as may be deemed necessary by the Departmental Representative.
- .3 Shape each layer to smooth contour and compact to specified density before succeeding layer is placed.
- .4 Compaction Equipment:
 - .1 Compaction equipment to be capable of obtaining required material densities.
- .5 Compacting:
 - .1 All Class "A" materials shall be compacted to not less than 100% of the maximum Standard Proctor Dry Density ASTM D698-07el Method D.
 - .2 Compaction operations shall be carried out as closely as possible behind the placing and spreading operation. At the end of each working day, all materials placed shall have been compacted to the specified density.
 - .3 Each layer of material shall be graded and compacted as specified before the next

		GRANULAR BASE COURSES	Section 32 11 23
Slipway Reconstruction Hermitage, NL			Page 5
Project Number 721935			2019-03-03
		layer is placed4 Where necessary to obtai compaction, the contractor sufficient water by means o distributor.	shall apply
3.2 INSPECTION AND TESTING		Testing of materials and co carried out by testing labo designated by the Departmen Representative.	ratory
		Contractor will pay costs fand testing.	or inspection
	3	Sieve Analysis: proposed gr will be tested to confirm s intended use and conformity specifications.	uitability for
	4	Frequency of Tests: to be d Departmental Representative	-
3.3 SITE TOLERANCES .	1	Finished base surface to be minus 10 mm of established	-

3.4 PROTECTION

section but not uniformly high or low.

conforming to this section until succeeding material is applied or until acceptance by

.1 Maintain finished base in condition

Departmental Representative.

FISHERIES AND OCEANS CANADIAN ENVIRONMENTAL ASSESSMENT ACT (CEAA) 2012 PROJECT EFFECTS DETERMINATION REPORT

GENERAL INFORMATION

1.	. Project Title: Boardwalk and Slipway Reconstruction, Hermitage, NL			
2	Proponent: Fisheries and Oceans Canada, Small Craft Harbours (DFO SCH)			
3.	. Other Contacts (Other Proponent, Consultant or Contractor): 4. Role:			
	Public Works and Government Services Canada	OGD Consultant		
5.	. Source of Project Information: Paul Curran, Regional Engineer, DFO – Small Craft Harbours			
6.	Project Review Start Date: April 29, 2019			
7.	PATH No.: N/A	8. PWGSC File No:		
9.	TC File No.: N/A			

BACKGROUND

10. Background about Proposed Development (including a description of the proposed development):

The scope of work includes the reconstruction of an existing boardwalk, and timber slipway structure at the DFO-SCH facility in Hermitage, NL (see appendix A). The existing concrete launchway, complete with toe cribbing, will also be reconstructed southeast of the existing slipway.

PROJECT REVIEW

11. DFO's rationale for the project review:
Project is on federal land ⊠ and;
□ DFO is the proponent
☐ DFO to issue Fisheries Act Authorization or Species at Risk Act Permit
☐ DFO to provide financial assistance to another party to enable the project to proceed
☐ DFO to lease or sell federal land to enable the project to proceed
Other
12. Fisheries Act Sections (if applicable):
n/a

13. Other Authorities • N/A	14. Other Authorities rationale for involvement:					
	• N/A					
15. Other Jurisdiction:						
• N/A						

16. Other Expert Departments Providing Advice:

17. Areas of Interest of Expert Departments:

N/A

N/A

18. Other Contacts and Responses: N/A

19. Scope of Project (details of the project subject to review):

Project Description

- The complete demolition and removal of the existing concrete launchway, and timber slipway and boardwalk. Creosote timber is present in both.
- Construction of a new slipway (post and beam construction) complete with toe cribbing. The new slipway will measure 15.54 m wide by 30.28 m long.
- Construction of a new concrete launchway, complete with toe cribbing. The new concrete launchway will measure 4.01 m wide by 25.23 m long.
- Construction of a new L shaped boardwalk on timber piles. The new boardwalk will be 60.58 m in length.

Refer to the site plans in Appendix B.

Operation/Maintenance

The Environmental Management System with an integrated Environmental Management Plan for the Harbour Authority of Hermitage will cover operational aspects of environmental management at the harbour (fuelling, waste disposal, activities on the property and water). As such, environmental effects resulting from the SCH operations are not considered further in this project effects determination.

Decommissioning

This facility is not presently planned to be decommissioned. At the time of decommissioning, Small Craft Harbours will develop a site-specific re-use or reclamation plan that is appropriate for the applicable environmental legislation and Fisheries and Oceans Canada policies.

Scheduling

Commencement of this project is subject to DFO SCH operational priorities and funding, as well as regulatory approval, but will likely proceed during the 2019-2020 fiscal year.

20. Location of Project:

Hermitage is a community located off Route 364, at coordinates 47° 33' 31" N and 55° 55' 36" W.

21. Environment Description:

The proposed project site is located in Hermitage, NL. Hermitage is within the South Coast Barrens ecoregion. The South Coast Barrens, as its name implies, is characterized by extensive barrens along the south coast of the Island of Newfoundland. Summers in the ecoregion are typically cool, marked by logs of fog and strong southerly winds; the winters, however, are mild.

The topography of the ecoregion has been affected by glacial activity in the last 10,000 years. Most of the area is covered by gently rolling ground moraine, although areas of exposed bedrock are common. The unique hummocky terrain near Burgeo was formed by the deposits of till left by a melting glacier.

In general, where there are sheltered coves, there are trees. Slope and basin bogs, and fens, are the dominant peatlands, which reflects the poor drainage and wet climate of this ecoregion. Before the arrival of Europeans, this sub region, as well as most of the Maritime Barrens, was covered by forest. The large expanses of open barrens so common now are due to the cutting and widespread fires that occurred following European colonization. The general reduction in tree seeds by fire, the thinness of the soil layer, and climatic conditions (strong winds, lack of protective snow cover, and frequent fog) allowed time for competitive dwarf shrub species to invade and dominate the burnt-over areas. As a result, much of this region is today characterized by barrens.

Low numbers of waterfowl, such as Canada goose, American black duck, and green-winged teal, use the area for breeding. Many land birds live in the forests of the sub region, most as migratory breeders (they breed here but migrate elsewhere for the winter), although some are residents (they remain year-round). The migratory breeders include the ruby-crowned kinglet, northern water thrust, white-throated sparrow, gray-cheeked thrush, fox sparrow, and yellow-rumped warbler. Dark-eyed junco and pine grosbeak are examples of forest residents.

As elsewhere in the province, moose, black bear, mink, snowshoe hare, and red fox live in the forest and shrub habitats. Other mammals that can occur here include the red squirrel, little brown bat, meadow vole, masked shrew, and eastern chipmunk. Beaver and muskrat are found in the vicinity of ponds and streams.

Gravel, cobble, boulder, and bedrock outcrops, are predominant along the shoreline. Fauna within the project area is comprised of near shore fish species such as cunner, tomcod, sculpin, winter flounder, lobsters, rock crab, sea cucumber, and blue mussel.

Water depth at the proposed project site ranges between 0.9 - 2.0 metres.

Species at Risk (Aquatic and Terrestrial)

A search of the Atlantic Canada Conservation Data Centre (ACCDC) database was conducted on May 22, 2019. The ACCDC provided a list of rare/unique species (i.e. plants and animals) within a 5 km buffer zone (standard ACCDC procedure) of the site. All species were cross-referenced with Schedule 1 of the Species at Risk Act (SARA) listed as extirpated, endangered, threatened, or special concern. The Bank Swallow (*Riparia riparia*) was found to be listed as threatened.

The proposed project will take place within the same footprint as existing structures, therefore, potential Bank Swallow habitat is not likely to be impacted.

22. Scope of Effects Considered (sections 5(1) and 5(2)):

Table 1: Potential Project / Environment Interactions Matrix

	As per Section 5(1)			Section 5(1c) Aboriginal Interest				Section 5(2)			Due Diligence			
Project Phase / Physical Work/Activity	Fish (Fisheries Act)	Aquatic Species (SARA)	Birds (MBCA)	Health and Socio economic	Physical and cultural heritage	Land use	*HAPA Significance	Health and Socio economic	Physical and cultural heritage	*HAPA Significance	Water (ground, surface, drainage, etc)	Terrestrial / Aquatic Species	Soil/Marine Sediments	Air Quality
Harbour development														
Boardwalk Reconstruction	Р	-	Р	-	-	-	-	Р		*	Р	Р	Р	Р
Slipway Reconstruction	Р	-	Р	-	-	-	-	Р	340	¥6	Р	Р	Р	Р
Launchway Reconstruction	Þ	-	Р	-	-	-	-	Р	0733	73.	Р	Р	Р	Р
Operation / Maintenance	-	-	-	-	-	-	-		9 2 ×	\$>	발	12	<u></u>	-
Decommissioning / Abandonment	-	-	-	-	-	-	-	-	474	5	ē.	-	17	ē.

*structure, site or thing that is of historical, archaeological, paleontological or architectural significance.

Legend: P = Potential Effect of Project on Environment; ' - ' = No Interaction

23. Environmental Effects of Project:

In the table above, potential environmental effects were identified. Scoped project activities such as dredging, disposal, wharf construction and infilling have the potential to effect the environment. Each of the potential effects are addressed here:

Fish / Fish Habitat

- Sedimentation and/or increased turbidity as a result of placement of launchway, slipway and/or boardwalk materials may negatively impact fish and quality of potential fish habitat.
- Accidental discharge of heavy machinery fuel/fluids will negatively impact fish and potential fish habitat.

Bird/Bird Habitat

- Any type of hydrocarbon spill could result in bird or bird habitat loss.
- Noise/fumes may result in birds avoiding the sit and surrounding areas.

Health and Socio economic

Potential for safety hazards to workers during demolition and construction activities.

Water

- Sedimentation and/or increased turbidity as a result of placement of launchway, slipway and/or boardwalk materials may decrease marine water quality at immediate project site.
- Accidental discharge of heavy machinery fuel/fluids will result in a decrease of marine water quality.
- Construction activities taking place near the shoreline may result in run off/erosion.

Aquatic Species

- Sedimentation and/or increased turbidity as a result of infilling may negatively impact aquatic species near project site.
- Accidental discharge of heavy machinery fuel/fluids may negatively impact aquatic species near project site.

Soil (Surface and Subsurface)/Marine Sediments

 Construction activities at site or natural events (e.g. rainfalls) could result in erosion, sedimentation, and/or increased turbidity.

Air Quality / Noise

 Some minor disruptions and annoyance to facility users and residents who live near the project site can be anticipated from project activities and the use of heavy equipment.

24. Mitigation Measures for Project (including Habitat Compensation):

Minimize duration of in water work.

Conduct instream work during periods of low flow, or at low tide, to further reduce the risk to fish and their habitat or to allow work in water to be isolated from flows.

Schedule work to avoid wet, windy and rainy periods that may increase erosion, sedimentation and/or increased turbidity. Plan activities near water such that materials such as paint, primers, blasting

abrasives, rush solvents, degreasers, grout, or other chemicals do not enter the watercourse.

Develop a response plan that is to be implemented immediately in the event of a sediment release or spill of a deleterious substance and keep an emergency spill kit on site.

Remove all construction materials from site upon project completion.

Ensure that machinery arrives on site in a clean condition and is maintained free of fluid leaks, invasive species and noxious weeds.

Whenever possible, operate machinery on land above the high-water mark, on ice, or from a floating barge in a manner that minimizes disturbance to the banks and bed of the waterbody.

Wash refuel and service machinery and store fuel and other materials for the machinery in such a way as to prevent any deleterious substances from entering the water.

If using a barge, vessels should be compliant with all Canada Shipping Act, 2001, requirements for inspection, which includes certification of the vessel and adequate training and appropriate certificate of competency for the operators.

Ensure that all vessels will have procedures in place to ensure safeguards against marine pollution: awareness training of all employees, means of retention of waste oil on board and discharge to shore based reception facilities, capacity of responding to and clean-up of accidental spill caused by vessels involved in any particular project.

Workers in contact with hazardous materials (e.g. wastes) must be provided with and use appropriate personal protective equipment;

Proper safety procedures must be followed during the duration of the project as per applicable municipal, provincial, and federal regulations;

Employees will be trained in health and safety protocols (e.g. safe work practices, emergency response).

25. Significance of Adverse Environmental Effects of project:

Significant adverse environmental effects are unlikely, taking into account mitigation measures.

26, Other Considerations (Public Consultation, Aboriginal Consultation, Follow-up)

Public Consultation

The proposed project will provide more adequate and secure access for vessels utilizing this facility. No negative public concern was received as a result of this project. SCH consulted the local harbor users and Harbour Authority on all aspects of the project to ensure all requirements at the site were considered during design.

Aboriginal Consultation

Aboriginal fishers are not known to utilize the Hermitage SCH facility. As such, aboriginal consultation was not deemed necessary as part of this determination.

Government Consultation

Federal and provincial authorities likely to have an interest in the project were consulted by Public Works & Government Services Canada, Environmental Services, during the course of this assessment.

The project was "self-assessed" in accordance with Fisheries and Oceans Canada, Fisheries Protection Program (DFO FPP) website. As a result of this assessment it was determined that the proposed project would not likely require a formal review by DFO FPP.

The project falls under section 5 of the Navigation Protection Act, Minor Works and Waters Order (NPA MWWO). As such, an application to Transport Canada's Navigation Protection Program was not deemed necessary.

Pollution Prevention Division provided approval to dispose of creosote treated timber material to an approved landfill.

Accuracy and Compliance Monitoring

A follow-up program (as defined in S. 2(1) and as applicable to non-designated projects on federal lands) is a program for determining the effectiveness of any mitigation measures. Site monitoring (accuracy and compliance monitoring) may be conducted to verify whether required mitigation measures were implemented. The proponent must provide site access to Responsible Authority officials and/or its agents upon request.

27. Other Monitoring and Compliance Requirements (e.g. Fisheries Act or Species at Risk Act requirements)

n/a

CONCLUSION

28. Conclusion on Significance of Adverse Environmental Effects:

The Federal Authorities have evaluated the project in accordance with Section 67 of Canadian Environmental Assessment Act (CEAA), 2012. On the basis of this evaluation, the departments have determined that the project is not likely to cause significant adverse environmental effects with mitigation and therefore can proceed as outlined.

29. Prepared by:

Notasha Maxen Date: June 7, 2019

31. Name:

Natasha Warren

32. Title:

Environmental Specialist, PWGSC-ES

DECISION

33.	Decision Take	n				
	project is no	ercise its power, duty or function, i.e. may issue the authorization - where the t likely to cause significant adverse environmental effects. Confirm below the ver, duty or function that may be exercised.				
	 □ DFO to issue Fisheries Act Authorization or Species at Risk Act Permit □ DFO to proceed with project (as proponent) □ for project to proceed financial assistance for project to proceed □ DFO to provide federal land for project to proceed 					
	to cause sig ☐ DFO to ask	ecided not to exercise its power, duty or function because the project is likely inificant adverse environmental effects. the Governor in Council to determine if the significant adverse environmental ustified in the circumstances				
34.	Approved by:	Paul Cum 35. Date: June 7/19				
36.	Name:	Paul Curran				
37.	Title:	Regional Engineer, DFO-SCH, NL				
38.	References:	n/a				

Appendix A FIGURES

-Topo Map - Aerial Photograph

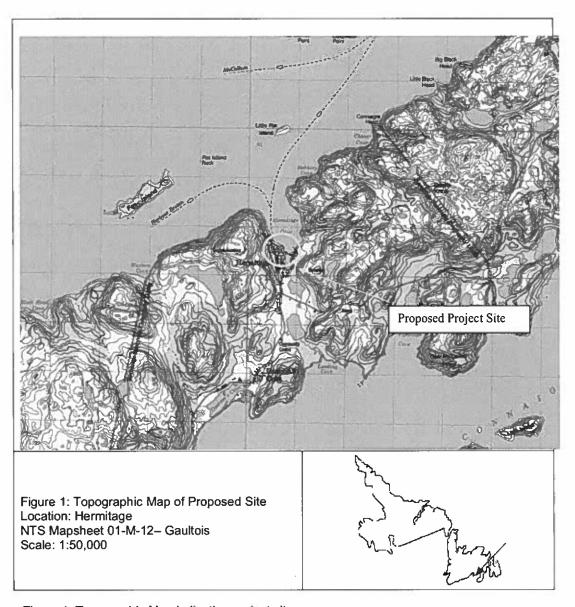


Figure 1: Topographic Map indicating project site.

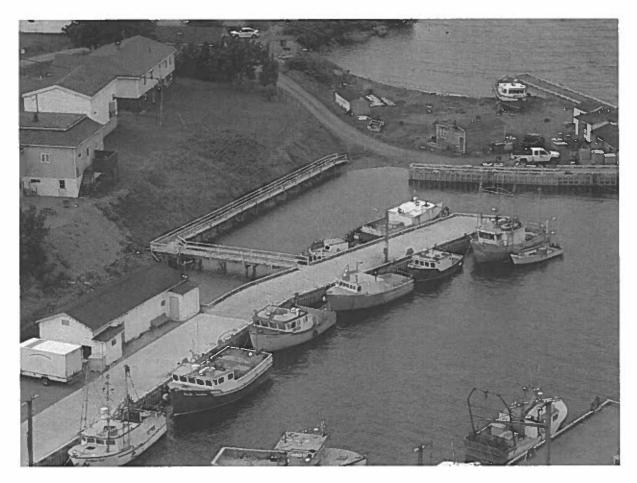


Figure 2: Location of proposed project (Boardwalk component).



Figure 2: Location of proposed project (Slipway and Launchway component).

Appendix B SITE PLANS



Figure 3: New Site Plan.

Appendix C REGULATORY APPROVALS

Measures to avoid causing harm to fish and fish habitat including aquatic species at risk

If you are conducting a project near water, it is your responsibility to ensure you avoid causing serious harm to fish in compliance with the <u>Fisheries Act</u> and avoid contravening SARA prohibitions. The following advice will help you avoid causing harm and comply with both Acts.

PLEASE NOTE: This advice applies to all project types and replaces all "Operational Statements" previously produced by DFO for different project types in all regions. Projects near water must also comply with the pollution <u>prevention provisions</u> of the Fisheries Act.

Measures

Project planning Timing

- Time work in water to respect <u>timing windows</u> to protect fish, including their eggs, juveniles, spawning adults and/or the organisms upon which they feed.
- Minimize duration of in-water work.
- Conduct instream work during periods of low flow, or at low tide, to further reduce the risk to fish and their habitat or to allow work in water to be isolated from flows.
- Schedule work to avoid wet, windy and rainy periods that may increase erosion and sedimentation.

Site selection

- Design and plan activities and works in waterbody such that loss or disturbance to aquatic
 habitat is minimized and sensitive spawning habitats are avoided, and impacts to SARAlisted aquatic species, their residences or critical habitat are avoided.
- Design and construct approaches to the waterbody such that they are perpendicular to the watercourse to minimize loss or disturbance to riparian vegetation.
- Avoid building structures on meander bends, braided streams, alluvial fans, active
 floodplains or any other area that is inherently unstable and may result in erosion and
 scouring of the stream bed or the built structures.
- Undertake all instream activities in isolation of open or flowing water to maintain the natural flow of water downstream and avoid introducing sediment into the watercourse.

Contaminant and spiil management

- Plan activities near water such that materials such as paint, primers, blasting abrasives, rust solvents, degreasers, grout, poured concrete or other chemicals do not enter the watercourse.
- Develop a response plan that is to be implemented immediately in the event of a sediment release or spill of a deleterious substance and keep an emergency spill kit on site.

 Ensure that building material used in a watercourse has been handled and treated in a manner to prevent the release or leaching of substances into the water that may be deleterious to fish.

Erosion and sediment control

- Develop and implement an Erosion and Sediment Control Plan for the site that minimizes risk of sedimentation of the waterbody during all phases of the project. Erosion and sediment control measures should be maintained until all disturbed ground has been permanently stabilized, suspended sediment has resettled to the bed of the waterbody or settling basin and runoff water is clear. The plan should, where applicable, include:
 - Installation of effective erosion and sediment control measures before starting work to prevent sediment from entering the water body.
 - Measures for managing water flowing onto the site, as well as water being pumped/diverted from the site such that sediment is filtered out prior to the water entering a waterbody. For example, pumping/diversion of water to a vegetated area, construction of a settling basin or other filtration system.
 - Site isolation measures (e.g., silt boom or silt curtain) for containing suspended sediment where in-water work is required (e.g., dredging, underwater cable installation).
 - Measures for containing and stabilizing waste material (e.g., dredging spoils, construction waste and materials, commercial logging waste, uprooted or cut aquatic plants, accumulated debris) above the high water mark of nearby waterbodies to prevent re-entry.
 - Regular inspection and maintenance of erosion and sediment control measures and structures during the course of construction.
 - Repairs to erosion and sediment control measures and structures if damage
 - Removal of non-biodegradable erosion and sediment control materials once site is stabilized.

Shoreline/bank re-vegetation and stabilization

- Clearing of riparian vegetation should be kept to a minimum: use existing trails, roads or
 cut lines wherever possible to avoid disturbance to the riparian vegetation and prevent
 soil compaction. When practicable, prune or top the vegetation instead of
 grubbing/uprooting.
- Minimize the removal of natural woody debris, rocks, sand or other materials from the banks, the shoreline or the bed of the waterbody below the ordinary high water mark. If material is removed from the waterbody, set it aside and return it to the original location once construction activities are completed.
- Immediately stabilize shoreline or banks disturbed by any activity associated with the project to prevent erosion and/or sedimentation, preferably through re-vegetation with native species suitable for the site.

- Restore bed and banks of the waterbody to their original contour and gradient; if the
 original gradient cannot be restored due to instability, a stable gradient that does not
 obstruct fish passage should be restored.
- If replacement rock reinforcement/armouring is required to stabilize eroding or exposed areas, then ensure that appropriately-sized, clean rock is used; and that rock is installed at a similar slope to maintain a uniform bank/shoreline and natural stream/shoreline alignment.
- Remove all construction materials from site upon project completion.
- Species at Risk Do not remove riparian vegetation if the riparian area is identified as part of critical habitat of an aquatic listed species at risk.

Fish protection

- Ensure that all in-water activities, or associated in-water structures, do not interfere with fish passage, constrict the channel width, or reduce flows, or result in the stranding or death of fish.
- Retain a qualified environmental professional to ensure appropriate protocols are applied, and applicable permits for relocating fish are obtained and to capture any fish trapped within an isolated/enclosed area at the work site and safely relocate them to an appropriate location in the same waters. Fish may need to be relocated again, should flooding occur on the site.

SARA-listed aquatic species

Any capture and relocation of an endangered or threatened aquatic species at risk will require approval from DFO. See the protocols for the detection and relocation of certain aquatic species at risk.

- Screen any water intakes or outlet pipes to prevent entrainment or impingement of fish.
 Entrainment occurs when a fish is drawn into a water intake and cannot escape.
 Impingement occurs when an entrapped fish is held in contact with the intake screen and is unable to free itself.
 - o In freshwater, follow these measures for design and installation of intake end of pipe fish screens to protect fish where water is extracted from fish-bearing waters:
 - Screens should be located in areas and depths of water with low concentrations of fish throughout the year.
 - Screens should be located away from natural or artificial structures that may attract fish that are migrating, spawning, or in rearing habitat.
 - The screen face should be oriented in the same direction as the flow.
 - Ensure openings in the guides and seals are less than the opening criteria to make "fish tight".
 - Screens should be located a minimum of 300 mm (12 in.) above the bottom of the watercourse to prevent entrainment of sediment and aquatic organisms associated with the bottom area.
 - Structural support should be provided to the screen panels to prevent sagging and collapse of the screen.

- Large cylindrical and box-type screens should have a manifold installed in them to ensure even water velocity distribution across the screen surface.
 The ends of the structure should be made out of solid materials and the end of the manifold capped.
- Heavier cages or trash racks can be fabricated out of bar or grating to protect the finer fish screen, especially where there is debris loading (woody material, leaves, algae mats, etc.). A 150 mm (6 in.) spacing between bars is typical.
- Provision should be made for the removal, inspection, and cleaning of screens
- Ensure regular maintenance and repair of cleaning apparatus, seals, and screens is carried out to prevent debris-fouling and impingement of fish.
- Pumps should be shut down when fish screens are removed for inspection and cleaning.
- Avoid using explosives in or near water. Use of explosives in or near water produces shock waves that can damage a fish swim bladder and rupture internal organs. Blasting vibrations may also kill or damage fish eggs or larvae.

Operation of machinery

- Ensure that machinery arrives on site in a clean condition and is maintained free of fluid leaks, invasive species and noxious weeds.
- Whenever possible, operate machinery on land above the high water mark, on ice, or from a floating barge in a manner that minimizes disturbance to the banks and bed of the waterbody.
- Limit machinery fording of the watercourse to a one-time event (i.e., over and back), and only if no alternative crossing method is available. If repeated crossings of the watercourse are required, construct a temporary crossing structure.
- Use temporary crossing structures or other practices to cross streams or waterbodies with steep and highly erodible (e.g., dominated by organic materials and silts) banks and beds.
 For fording equipment without a temporary crossing structure, use stream bank and bed protection methods (e.g., swamp mats, pads) if minor rutting is likely to occur during fording.
- Wash, refuel and service machinery and store fuel and other materials for the machinery in such a way as to prevent any deleterious substances from entering the water.
- Species at Risk Do not ford, place crossing materials or operate machinery on the bed of a waterbody where SARA-listed shellfish occur, or critical habitat or residences of freshwater SARA-listed aquatic species occur.

From: To: Hann, Joan
Cathy Martin
Boone, Karl

Cc:

Boo

Subject:

FW: Permission for Timber Disposal - Hermitage, NL

Date: Attachments: June-06-19 3:05:15 PM image004.png

image001.emz

oledata.mso

Hann Timber disposal Itr Hermitage.pdf

Hello Cathy

The TWW is acceptable for disposal to an approved WDS. Contact regional SNL office (Karl - I believe that is your area , if not please forward to appropriate EPO) for a location. Regards

Joan Hann

Environmental Scientist
Pollution Prevention Division
Department of Municipal Affa

Department of Municipal Affairs and Environment

4th Floor, Confederation Building, West Block

P.O. Box 8700

St. John's, NL, Canada A1B 4J6 Email: <u>Joanhann@gov.nl.ca</u> Phone: 709-729-1771

From: Cathy Martin [mailto:Cathy.Martin@pwgsc-tpsgc.gc.ca]

Sent: Wednesday, June 05, 2019 4:33 PM

To: Hann, Joan

Subject: Permission for Timber Disposal - Hermitage, NL

Good Afternoon Joan,

Please see the attached request.

Thanks in advance,

Cathy



Cathy Martin

Environmental Services / Service Environnementaux

Public Services and Procurement Canada / Government of Canada cathy.martin@pwgsc-tpsgc.gc.ca / Tel: 709-691-1567

Services publics et Approvisionnement Canada / Gouvernement du Canada cathy.martin@tpsgc-pwgsc.gc.ca / Tél: 709-691-1567

[&]quot;This email and any attached files are intended for the sole use of the primary and copied addressee(s) and may contain privileged and/or confidential information. Any distribution, use or copying by any means of this information is strictly prohibited. If you received this email in error, please delete it immediately and notify the sender."

Extract Canada Gazette, Part I April 19, 2014



Extrait Gazette du Canada, Partie I Le 19 avril 2014

DEPARTMENT OF TRANSPORT

MINISTÈRE DES TRANSPORTS

Order Amending the Minor Works and Waters (Navigable Waters Protection Act) Order Arrêté modifiant l'Arrêté sur les ouvrages et les eaux secondaires (Loi sur la protection des eaux navigables)

DEPARTMENT OF TRANSPORT

NAVIGABLE WATERS PROTECTION ACT

Order Amending the Minor Works and Waters (Navigable Waters Protection Act) Order

The Minister of Transport, pursuant to subsection 13(1)^a of the Navigable Waters Protection Act, makes the annexed Order Amending the Minor Works and Waters (Navigable Waters Protection Act) Order.

Ottawa, March 31, 2014

LISA RAITT

Minister of Transport

MINISTÈRE DES TRANSPORTS

LOI SUR LA PROTECTION DES EAUX NAVIGABLES

Arrêté modifiant l'Arrêté sur les ouvrages et les eaux secondaires (Loi sur la protection des eaux navigables)

La ministre des Transports, en vertu du paragraphe 13(1)^a de la Loi sur la protection des eaux navigables^b, prend l'Arrêté modifiant l'Arrêté sur les ouvrages et les eaux secondaires (Loi sur la protection des eaux navigables), ci-après.

Ottawa, le 31 mars 2014

La ministre des Transports LISA RAITT

ORDER AMENDING THE MINOR WORKS AND WATERS (NAVIGABLE WATERS PROTECTION ACT) ORDER

AMENDMENTS

- 1. (1) The definitions "berm" and "high-water mark" in section 1 of the Minor Works and Waters (Navigable Waters Protection Act) Order1 are repealed.
- (2) The definitions "petit quai" and "plan d'eau navigable cartographié" in section 1 of the French version of the Order are repealed.
- (3) The definition "charted navigable waters" in section 1 of the English version of the Order is replaced by the following:

"charted navigable water" means navigable waters for which navigation charts are produced by the Canadian Hydrographic Service or the National Oceanic and Atmospheric Administration,

- (4) The marginal note to the definition "dock" in section 1 of the English version of the Order is amended by replacing "petit quai" with "quai".
- (5) Section 1 of the Order is amended by adding the following in alphabetical order:

"ice breaker" a brise-glace n

"charted

navigable

navigables cartogra-

phiées »

water"

« eatex

"ice breaker" means a vessel that is specially constructed or modified for the purpose of navigating through ice.

ARRÊTÉ MODIFIANT L'ARRÊTÉ SUR LES **OUVRAGES ET LES EAUX SECONDAIRES** (LOI SUR LA PROTECTION DES EAUX NAVIGABLES)

MODIFICATIONS

- 1. (1) Les définitions de « berme » et « laisse des hautes eaux », à l'article 1 de l' ouvrages et les eaux secondaires (Loi sur la protection des eaux navigables)1, sont abrogées.
- (2) Les définitions de « petit quai » et « plan d'eau navigable cartographié », à l'article 1 de la version française du même arrêté, sont abrogées.
- (3) La définition de « chartered navigable waters », à l'article 1 de la version anglaise du même arrêté, est remplacée par ce qui suit :

"charted navigable water" means navigable waters for which navigation charts are produced by the Canadian Hydrographic Service or the National Oceanic and Atmospheric Administration.

"charted navigable « euna navigables curtogra oluees »

- (4) Dans la note marginale relative à la définition de « dock », à l'article 1 de la version anglaise du même arrêté, « petit quai » est remplacé par « quai ».
- (5) L'article 1 du même arrêté est modifié par adjonction, selon l'ordre alphabétique, de ce qui
- « brise-glace » Bateau spécialement construit ou modifié pour naviguer à travers les glaces.

« brise-glace » "live breaker"

⁸ S.C. 2009, c. 2, s. 328

R.S., c. N-22

Canada Gazette, Part I, May 9, 2009

L.C. 2009. ch. 2, art. 328

^{1.} R., ch. N=22

Partie I de la Gazette du Canada, le 9 mai 2009

"pipeline" « pipeline » "pipeline" includes a conduit that contains wires or

(6) Section 1 of the French version of the Order is amended by adding the following in alphabetical order:

« саих navigables cartographičes » "charted navigable witter

« duai » "dock"

« eaux navigables cartographiées » Eaux navigables pour lesquelles des cartes de navigation sont produites par le Service hydrographique du Canada ou la National Oceanie and Atmospherie Administration.

« quai » S'entend notamment d'un môle ou d'une ictée.

2. The heading before section 2 and sections 2 to 14 of the Order are replaced by the following:

TERMS AND CONDITIONS

Imposed under paragraph 13(1)(b)

2. Subsections 3(4) to (8), 4(3) to (6), 5(3) to (7), 6(3) to (9), 7(3) to (11), 8(3) to (11), 9(3) to (5), 11(4) to (8), 12(3) to (8) and 13(4) and (5) are terms and conditions imposed under paragraph 13(1)(b) of the Act

CLASSES OF WORKS

EROSION-PROTECTION WORKS

Definitions

3. (1) The following definitions apply in this "erosion-protection works" means shoreline-

stabilization, riprap or bank-protection works.

"erosionprotection works" « ouvrages de protection contre

l'erosion » "groyne" or "spur" « épi » ou

"riprap" a enrichenient »

« éperon »

"shorelinestabilization" « stabilisation des rives s

Class established

"groyne" or "spur" means a structure built out from

the bank of a navigable water in a direction transverse to the current in order to prevent erosion of the bank. "riprap" means a layer of stones or rocks placed

irregularly on a slope or a bank of a navigable water in order to protect the slope or bank against scouring or erosion.

"shoreline-stabilization" means stones, rocks, concrete, logs or other common building materials, or living plants, placed in order to protect the shores of a navigable water from erosion.

- (2) Erosion-protection works are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the works are integrated with and parallel to the existing or natural shoreline or bank;
 - (b) the base of the works is 5 m or less from the high-water mark:
 - (c) the vertical to horizontal slope of the works from the navigable water is greater than 33%;
 - (d) the works are not associated with an existing or proposed structure, including a bridge, boom, dam or road, across the navigable water; and
 - (e) the works do not include groynes, spurs or other devices to deflect the current.

« pipeline » Est assimilé au pipeline un conduit dans lequel se trouvent des fils ou des tuyaux.

(6) L'article 1 de la version française du même arrêté est modifié par adjonction, selon l'ordre alphabétique, de ce qui suit :

« caux navigables cartographiées » Eaux navigables pour lesquelles des cartes de navigation sont produites par le Service hydrographique du Canada la National Oceanic and Atmospheric Administration.

« caux navigables cartogra-'charted navigable water"

« quai » S'entend notamment d'un môle ou d'une « quai » ictée.

2. L'intertitre précédant l'article 2 et les articles 2 à 14 du même arrêté sont remplacés par ce aui suit :

CONDITIONS

2. Les paragraphes 3(4) à (8), 4(3) à (6), 5(3) à (7), Conditions 6(3) à (9), 7(3) à (11), 8(3) à (11), 9(3) à (5), 11(4) à prévues à (8), 12(3) à (8) et 13(4) et (5) sont des conditions de la Loi prévues à l'alinéa 13(1)b) de la Loi.

l'alinéa 13(1)b)

CATÉGORIES D'OUVRAGES

OUVRAGES DE PROTECTION CONTRE L'ÉROSION

3. (1) Les définitions qui suivent s'appliquent au Définitions présent article.

« enrochement » Couche de pierres ou de roches dis- « enrochement » posées irrégulièrement sur une pente ou une berge "riprap" des eaux navigables pour protéger celles-ci contre

l'affouillement ou l'érosion: « épi » ou « éperon » Structure construite sur la « épi » ou berge des eaux navigables dans un axe transversal au "éperon » "grovne" or courant pour en prévenir l'érosion.

'spur'

« ouvrages de protection contre l'érosion » Ouvrages de stabilisation des rives, d'enrochement ou de protection des berges.

« ouvrages de protection l'érosion » "erosion protection works'

« stabilisation des rives » Pierres, roches, béton, rondins ou autres matériaux de construction courants, ou plantes vivantes, qui sont placés pour protéger les rives des eaux navigables contre l'érosion.

« stabilisation des rives »

(2) Les ouvrages de protection contre l'érosion Catégorie sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :

- a) les ouvrages sont intégrés et parallèles à la rive ou à la berge existantes ou naturelles;
- b) l'assise des ouvrages se trouve à 5 m ou moins de la laisse des hautes eaux;
- c) la pente des ouvrages, de la verticale à l'horizontale, à partir des eaux navigables est supérieure à 33 %;
- d) les ouvrages ne sont pas associés à une structure existante ou projetée, y compris un pont, une estacade, un barrage ou une route qui traversent les eaux navigables;
- e) ils ne comprennent ni épis, ni éperons, ni aucun autre dispositif, qui servent à dévier le courant.

Temporary works - class established

- (3) Temporary works that are required for the construction or placement of works of the class established by subsection (2) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works
 - (a) are in, on, over, under, through or across a navigation channel; or
 - (b) cross more than halfway from one side of the navigable water to the other side.

During construction or placement

- (4) During the construction or placement of works of the class established by subsection (2) or (3), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site; and
 - (b) in the case of a river, a stream, a creek or similar navigable water that, when measured from the ordinary high-water mark on one side of the navigable water to the ordinary high-water mark on the other side, is of a width set out in column 1 of the table to this subsection, signs stating "Construction Ahead" and "Travaux de construction" that are legible from at least 50 m are in place, upstream and downstream from the work site, at the minimum distance set out in column 2.

(3) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement des ouvrages de la catégorie établie par le paragraphe (2) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf dans les cas suivants:

- a) ils sont situés dans un chenal de navigation, sur. sous ou à travers celui-ci, ou au-dessus de celui-ci:
- b) ils occupent, sur plus de leur moitié, les eaux navigables d'un côté à l'autre.
- (4) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (2) ou (3), leur propriétaire veille à ce que les conditions suivantes soient respectées :
 - a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier;
 - b) dans le cas des rivières ou des fleuves, des ruisseaux, des criques ou des eaux navigables semblables qui, lorsqu'ils sont mesurés de la laisse des hautes eaux ordinaires d'un côté des eaux navigables à la laisse des hautes eaux ordinaires de l'autre côté, sont d'une largeur figurant à la colonne 1 du tableau du présent paragraphe, des panneaux portant les mentions « Travaux de construction » et « Construction Ahead », lisibles à une distance d'au moins 50 m, sont en place en amont et en aval du chantier, à la distance minimale figurant à la colonne 2.

temporaires

construction on Pemplacement

TABLE

	Column 1	Column 2
Item	Width of Navigable Water	Minimum Distance
1.	Less than 10 m	25 m
2.	10 m or more but less than 20 m	50 m
3.	20 m or more but less than 50 m	m 001
4.	50 m or more	200 m

During construction or placement of temporary works

- (5) During the construction or placement of works of the class established by subsection (3), the owner of the works must ensure that
 - (a) if the works are on or over a navigable water, the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or

TABLEAU

	Colonne 1	Colonne 2	
Article	Largeur des eaux navigables	Distance minimale	
1.	Moins de 10 m	25 m	
2.	10 m ou plus mais moins de 20 m	50 m	
3.	20 m ou plus mais moins de 50 m	100 m	
4.	50 m ou plus	200 m	

- (5) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par le paragraphe (3), leur propriétaire veille à ce que les conditions suivantes soient respectées:
 - a) si les ouvrages sont situés sur les eaux navigables ou au-dessus de celles-ci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite, par des feux clignotants jaunes qui sont conformes aux exigences suivantes:
 - (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m,

construction ou l'emplacement d'ouvrages temporaires

- (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
- (b) if the works are in or through a navigable water, the works are marked with cautionary buoys that are lighted from dusk to dawn and during periods of restricted visibility and are
 - (i) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

Removal of temporary works

(6) The owner of works of the class established by subsection (3) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Restoration of contours

- (7) The owner of works of the class established by subsection (2) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsec-
 - (b) the removal of works of the class established by subsection (3).

Works in disrepair

(8) If works of the class established by subsection (2) become a danger to navigation because of disrepair, the owner of the works must immediately repair the works so that they are no longer a danger to navigation.

DOCKS AND BOATHOUSES

Class established

- 4. (1) Docks and boathouses are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the works are not within 5 m of the adjoining property lines at the ordinary high water mark;
 - (b) the works are not within 10 m of a dock, boathouse or other structure that is in, on, over, through or across the navigable water and that is not owned by the owner of the works,

- si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
- (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de
- b) si les ouvrages sont situés dans les eaux navigables ou à travers le cours de celles-ci, ils sont indiqués par des bouées d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:
 - (i) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.
- (6) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (3) veille à ce que ceux-ci d'ouvrages soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

(7) Le propriétaire d'ouvrages de la catégorie éta- Remise en état hlie par le paragraphe (2) veille à ce que les contours des contours du lit des eaux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel des l'achèvement de la construction ou de l'emplacement de ces ouvrages :

- a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (3);
- b) l'enlèvement d'ouvrages de la catégorie établie par le paragraphe (3).
- (8) Si des ouvrages de la catégorie établie par le Ouvrages en paragraphe (2) deviennent un danger pour la navigation en raison de leur mauvais état, leur propriétaire les répare immédiatement pour qu'ils ne constituent plus un danger pour la navigation.

mauvais état

QUAIS ET REMISES À EMBARCATIONS

- 4. (1) Les quais et les remises à embarcations sont Catégorie établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :
 - a) les ouvrages ne sont pas situés à 5 m ou moins des limites d'une propriété attenante à la laisse des hautes eaux ordinaires;
 - b) ils ne sont pas situés à 10 m ou moins d'un quai, d'une remise à embarcations ou d'une autre structure qui se trouvent dans les eaux navigables,

- (c) in the case of a charted navigable water, the works are not within 30 m of a navigation channel:
- (d) the works do not extend further in, on or over the navigable water than any other structure within 100 m of the works;
- (e) the works do not, when measured from the ordinary high-water mark, extend horizontally more than 30 m into, onto, over, through or across the navigable water;
- (f) the works do not cross more than halfway from one side of the navigable water to the other side;
- (g) the works are not associated with any other proposed works that are not of a class established by this Order; and
- (h) the works are not used for float planes or other aircraft equipped with floats.

Temporary works - class established

- (2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works
 - (a) are in, on, over, under, through or across a navigation channel; or
 - (b) cross more than halfway from one side of the navigable water to the other side.

During construction or placement

- (3) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site;
 - (b) if the works are on or over a navigable water, that the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
 - (c) if the works are in or through a navigable water, the works are marked with cautionary

- sur ou à travers celles-ci, ou au-dessus de celles-ci et qui n'appartiennent pas au propriétaire des ouvrages;
- c) dans le cas des eaux navigables cartographiées, ils ne sont pas situés à 30 m ou moins d'un chenal de navigation;
- d) ils ne s'étendent, ni dans les eaux navigables, ni sur celles-ci, ni au-dessus de celles-ci, à 100 m ou moins de tout autre ouvrage;
- e) lorsqu'ils sont mesurés à partir de la laisse des hautes eaux ordinaires, ils ne s'étendent pas horizontalement au-delà de 30 m dans les eaux navigables, sur ou à travers celles-ci, ou au-dessus de celles-ci;
- f) ils n'occupent pas, sur plus de leur moitié, les caux navigables d'un côté à l'autre;
- g) ils ne sont associés à aucun autre ouvrage projeté qui n'est pas d'une catégorie établie par le présent arrêté;
- h) ils ne sont utilisés ni pour des hydravions ni pour d'autres aéronefs munis de flotteurs.
- (2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf dans les cas suivants:

temporaires

- a) ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci, ou au-dessus de celui-ci:
- b) ils occupent, sur plus de leur moitié, les eaux navigables d'un côté à l'autre.
- (3) Durant la construction ou l'emplacement d'ou- Durant la vrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les conditions suivantes soient respectées :
 - a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier;
 - b) si les ouvrages sont situés sur les eaux navigables ou au-dessus de celles-ci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite, par des feux elignotants jaunes qui sont conformes aux exigences suivantes :
 - (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci

construction ou l'emplacement

buoys that are lighted from dusk to dawn and during periods of restricted visibility and are

- (i) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
- (ii) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
- (iii) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
- (iv) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

Removal of temporary works

(4) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Restoration of contours

- (5) The owner of works of the class established by subsection (1) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsection (2); or
 - (b) the removal of works of the class established by subsection (2).

Works in disrepair

- (6) If works of the class established by subsection (1) become a danger to navigation because of disrepair, the owner of the works must immediately
 - (a) repair the works so that they are no longer a danger to navigation; or
 - (b) remove the works:

BOAT RAMPS, SLIPWAYS AND LAUNCH RAMPS

Class established

- 5. (1) Boat ramps, slipways and launch ramps that are not marine railways are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the works are not within 5 m of the adjoining property lines at the ordinary high-water mark;
 - (b) the works are not associated with any other proposed works that are not of a class established by this Order.

- de façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m:
- c) si les ouvrages sont situés dans les eaux navigables ou à travers le cours de celles-ci, ils sont indiqués par des bouées d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:
 - (i) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.
- (4) Le propriétaire d'ouvrages de la catégorie Enlèvement établie par le paragraphe (2) veille à ce que ceux-cisoient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

(5) Le propriétaire d'ouvrages de la catégorie éta- Remise en état blie par le paragraphe (1) veille à ce que les contours du lit des caux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel dès l'achèvement de la construction ou de l'emplacement de ces ouvrages :

- a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (2);
- b) l'enlèvement d'ouvrages de la catégorie établie par le paragraphe (2).
- (6) Si des ouvrages de la catégorie établie par le Ouvrages en paragraphe (1) deviennent un danger pour la navigation en raison de leur mauvais état, leur propriétaire est tenu, selon le cas :

mauvais état

- a) de les réparer immédiatement pour qu'ils ne constituent plus un danger pour la navigation;
- b) de les enlever immédiatement.

RAMPES À BATEAUX, CALES DE HALAGE ET RAMPES DE MISE À L'EAU

- 5. (1) Les rampes à bateaux, les cales de halage et Catégorie les rampes de mise à l'eau qui ne sont pas des slips de carénage sont établies comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :
 - a) les ouvrages ne sont pas situés à 5 m ou moins des limites d'une propriété attenante à la laisse des hautes eaux ordinaires;
 - b) ils ne sont associés à aucun autre ouvrage projeté qui n'est pas d'une catégorie établie par le présent arrêté.

d'auvrages

Temporary works - class established

- (2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works
 - (a) are in, on, over, under, through or across a navigation channel; or
 - (b) cross more than halfway from one side of the navigable water to the other side.

During construction or placement

(3) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site.

During construction or placement of temporary works

- (4) During the construction or placement of works of the class established by subsection (2), the owner of the works must ensure that
 - (a) if the works are on or over a navigable water. the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
 - (b) if the works are in or through a navigable water, the works are marked with cautionary buoys that are lighted from dusk to dawn and during periods of restricted visibility and are
 - (i) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

(2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf dans les cas suivants:

- a) ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci, ou au-dessus de celui-ci:
- b) ils occupent, sur plus de leur moitié, les eaux navigables d'un côté à l'autre.
- (3) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les bateaux puissent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, à ce qu'il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier.

construction ou l'emplacement

- (4) Durant la construction ou l'emplacement d'ou- Durant la vrages de la catégorie établie par le paragraphe (2), leur propriétaire veille à ce que les conditions suivantes soient respectées:
 - a) si les ouvrages sont situés sur les eaux navigables ou au-dessus de celles-ci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite, par des feux elignotants jaunes qui sont conformes aux exigences suivantes :
 - (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m;
 - b) si les ouvrages sont situés dans les eaux navigables ou à travers le cours de celles-ci, ils sont indiqués par des bouées d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:
 - (i) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,

construction ou L'emplacement d'ouvrages temporaires

Removal of temporary

(5) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Restoration of contours

- (6) The owner of works of the class established by subsection (1) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsection (2); or
 - (b) the removal of works of the class established by subsection (2).

Works in disrepair

- (7) If works of the class established by subsection (1) become a danger to navigation because of disrepair, the owner of the works must immediately
 - (a) repair the works so that they are no longer a danger to navigation; or
 - (b) remove the works.

AERIAL CABLES - POWER AND TELECOMMUNICATION

Class established

- (1) Aerial cables that are over or across a navigable water and that are only for power or telecommunication purposes, and the associated structures and equipment, are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the width of the navigable water at the site of the crossing is less than 30 m when measured from the ordinary high-water mark on one side of the navigable water to the ordinary high-water mark on the other side;
 - (b) the works are not over or across a lake or tidal waters:
 - (c) the works are not over or across a canal that is accessible to the public;
 - (d) the works do not include towers or poles within the area between the ordinary high-water marks on each side of the navigable water; and
 - (e) the works meet the requirements of section 5.3.3.2 of Overhead Systems, CAN/CSA-C22.3 No. 1-10, as amended from time to time.

Temporary works - class established

(2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works are in, on, under, through or across a navigation channel.

(iv) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.

(5) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

- (6) Le propriétaire d'ouvrages de la catégorie éta- Remise en état blie par le paragraphe (1) veille à ce que les contours du lit des eaux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel dès l'achèvement de la construction ou de l'emplacement de ces ouvrages :
 - a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (2),
 - b) l'enlèvement d'ouvrages de la catégorie établie par le paragraphe (2).
- (7) Si des ouvrages de la catégorie établie par le Ouvrages en paragraphe (1) deviennent un danger pour la navigation en raison de leur mauvais état, leur propriétaire est tenu, selon le cas :

a) de les réparer immédiatement pour qu'ils ne constituent plus un danger pour la navigation;

b) de les enlever immédiatement.

CÂBLES AÉRIENS — ÉNERGIE ET TELECOMMUNICATIONS

6. (1) Les câbles aériens qui passent au-dessus ou Catégorie à travers les eaux navigables et qui servent unique- d'ouvrages ment pour l'énergie ou les télécommunications, ainsi que leurs supports et équipements, sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies!

a) la largeur des eaux navigables au lieu de passage, mesurée de la laisse des hautes eaux ordinaires d'un côté des eaux navigables à la laisse des hautes eaux ordinaires de l'autre côté, est inférieure à 30 m;

- b) les ouvrages ne passent ni au-dessus d'un lac ou d'eaux à marée ni à travers ceux-ci;
- c) ils ne passent ni au-dessus d'un canal accessible au public ni à travers celui-ci;
- d) ils ne comprennent ni pylônes ni poteaux situés dans la zone comprise entre la laisse des hautes caux ordinaires de chaque côté des caux navigables;
- e) ils sont conformes aux exigences de l'article 5.3.3.2 de la norme CAN/CSA-C22.3 nº 1-10, intitulée Réseaux aériens, avec ses modifications successives.
- (2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci.

d'ouvrages temporaires notification of Canadian Coast Guard

(3) If works of the class established by subsection (2) are in a charted navigable water, the owner of the works must, at least 48 hours before the construction or placement of the works starts, in writing notify a Canadian Coast Guard Marine Communications and Traffic Services Centre of the day on which construction or placement of the works is expected to start.

During construction or placement

- (4) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site;
 - (b) in the case of a river, a stream, a creek or similar navigable water, that signs stating "Construction Ahead" and "Travaux de construction" that are legible from at least 50 m are in place 50 m upstream and downstream from the work site; and (e) that any cables that are in, on, over, under, through or across the navigable water are not left unattended or unsupervised unless they meet the

requirements referred to in paragraph (1)(e) or are

lying on the bed of the water.

Removal of temporary works

(5) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Notification of Canadian Coast Guard on removal

(6) If works of the class established by subsection (2) are in a charted navigable water, on removal of the works the owner of the works must, in writing, notify a Canadian Coast Guard Marine Communications and Traffic Services Centre that the works have been removed.

Notification of Canadian Hydrographic completion

(7) If works of the class established by subsection (1) are over or across a charted navigable water, on completion of the construction or placement of the works the owner of the works must, in writing, notify the Canadian Hydrographic Service that the works have been constructed or placed.

Maintenance

(8) The owner of works of the class established by subsection (1) must ensure that the works continue to meet the requirements referred to in paragraph (1)(e).

Works in disrenair

- (9) If works of the class established by subsection (1) become a danger to navigation because of disrepair, the owner of the works must immediately
- (a) repair the works so that they are no longer a danger to navigation; or
- (b) remove the works.

(3) Si des ouvrages de la catégorie établie par le Notification paragraphe (2) sont situés dans des eaux navigables cartographiées, leur propriétaire notifie par écrit, au moins quarante-huit heures avant le commencement de la construction ou de l'emplacement des ouvrages, à un centre des Services de communications et de trafic maritimes de la Garde côtière canadienne, la date prévue du commencement de la construction ou de l'emplacement des ouvrages.

préalable à la canadienne

(4) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les conditions suivantes soient respectées :

construction ou l'emplacement

- a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier;
- b) dans le cas des rivières ou des fleuves, des ruisseaux, des criques ou des eaux navigables semblables, des panneaux portant les mentions « Travaux de construction » et « Construction Ahead », lisibles à une distance d'au moins 50 m, sont en place à 50 m en amont et en aval du chantier;
- e) les câbles qui sont dans les caux navigables, sur, sous ou à travers celles-ci, ou au-dessus de celles-ci ne sont laissés ni sans surveillance ni sans supervision, sauf s'ils sont conformes aux exigences visées à l'alinéa (1)e) ou s'ils reposent sur le lit des caux navigables.
- (5) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

(6) Si des ouvrages de la catégorie établie par le paragraphe (2) sont situés dans des eaux navigables cartographiées, leur propriétaire notifie par écrit, dès leur enlèvement, à un centre des Services de com- l'enlèvement munications et de trafic maritimes de la Garde côtière canadienne, que les ouvrages ont été enlevés.

Notification à la Garde côtière canadienne

(7) Si des ouvrages de la catégorie établie par le paragraphe (1) passent au-dessus des eaux navigables cartographiées ou à travers celles-ci, leur propriétaire notifie par écrit, dès l'achèvement de la construction ou du placement des ouvrages, au Ser- l'achèvement vice hydrographique du Canada, que les ouvrages ont été construits ou places.

Notification au Service hydrographique

(8) Le propriétaire d'ouvrages de la catégorie éta- Entretien et blie par le paragraphe (1) veille à ce que les ouvrages demeurent conformes aux exigences visées à l'alinéa (1)e).

exploitation

manyais état

- (9) Si des ouvrages de la catégorie établie par le Ouvrages en paragraphe (1) deviennent un danger pour la navigation en raison de leur mauvais état, leur propriétaire est tenu, selon le cas:

 - a) de les réparer immédiatement pour qu'ils ne constituent plus un danger pour la navigation;
 - b) de les enlever immédiatement.

944 Canada Gazette Part I April 19, 2014

Effective date of amendments

(10) An amendment to one language version of section 5.3.3.2 of Overhead Systems, CAN/CSA-C22.3 No. 1-10, is not incorporated until the corresponding amendment is made to the other language version.

SUBMARINE CABLES - POWER AND TELECOMMUNICATION

Class established

- 7. (1) Submarine cables that are only for power or telecommunication purposes are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the works lie on or under the bed of the navigable water:
 - (b) the works do not extend vertically above the bed of the navigable water more than
 - (i) in the case of a navigable water of less than 15 m in depth, when measured from the ordinary high-water mark, 5% of the depth of the water when measured from the ordinary highwater mark, or
 - (ii) in any other case, 1 m;
 - (c) the works are not across the entrance to any port, including any marina;
 - (d) the works are not in a dredged channel or area with maintained depth; and
 - (e) the works are not in an area that is identified as an anchorage area on a Canadian Hydrographic Service or National Oceanic and Atmospheric Administration chart.

Temporary class established

(2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works are in, on, over, under, through or across a navigation channel.

Prior notification of Canadian Coast Guard

(3) If works of the class established by subsection (2) are in a charted navigable water, the owner of the works must, at least 48 hours before the construction or placement of the works starts, in writing notify a Canadian Coast Guard Marine Communications and Traffic Services Centre of the day on which construction or placement of the works is expected to start:

During construction or placement

(4) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure that vessels can navigate safely through the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site.

During construction or placement of temporary works

(5) During the construction or placement of works of the class established by subsection (2), the owner of the works must ensure, that if the works are in or through a navigable water, the works are marked with cautionary buoys that are lighted from dusk to

(10) Les modifications apportées dans une seule Date version linguistique de l'article 5.3.3.2 de la norme d'entrée en CAN/CSA-C22.3 nº 1-10, intitulée Réseaux aériens, modifications ne sont pas incorporées tant qu'elles ne sont pas apportées dans l'autre version linguistique.

CÂBLES SOUS-MARINS — ENERGIE ET **TÉLÉCOMMUNICATIONS**

- 7. (1) Les câbles sous-marins qui servent unique Catégorie ment pour l'énergie ou les télécommunications sont d'ouvrages établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies:
 - a) les ouvrages reposent sur le lit des eaux navigables ou sous celui-ci;
 - b) ils ne s'étendent pas verticalement au-dessus du lit des eaux navigables;
 - (i) dans le cas d'eaux navigables d'une profondeur de moins de 15 m, mesurée de la laisse des hautes eaux ordinaires, au-delà de 5 % de la profondeur des eaux, mesurée de la laisse des hautes eaux ordinaires,
 - (ii) dans tous les autres cas, au-delà de 1 m;
 - c) ils ne traversent pas l'entrée d'un port, y compris toute marina;
 - d) ils ne sont pas situés dans un chenal ou une zone dragués avec la profondeur entretenue;
 - e) ils ne sont pas situés dans une zone indiquée comme un mouillage sur une carte du Service hydrographique du Canada ou de la National Oceanic and Atmospheric Administration.
- (2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci, ou au-dessus de celui-ci.
- (3) Si des ouvrages de la catégorie établie par le Notification paragraphe (2) sont situés dans des eaux navigables cartographices, leur propriétaire notifie par écrit, au moins quarante-huit heures avant le commencement de la construction ou de l'emplacement des ouvrages, à un centre des Services de communications et de trafic maritimes de la Garde côtière canadienne, la date prévue du commencement de la construction ou de l'emplacement des ouvrages.
- (4) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les bateaux puissent naviguer de façon sécuritaire à travers le chantier ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, à ce qu'il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier.
- (5) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par le paragraphe (2), leur propriétaire veille à ce que ceux qui sont situés dans les eaux navigables ou à travers le cours de celles-ci soient indiqués par des bouées

d'ouvrages temporaires

Garde côtière canadienne

construction on l'emplacement

construction on l'emplacement

dawn and during periods of restricted visibility and

- (a) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length;
- (b) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length;
- (c) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length; or
- (d) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

Removal of temporary works

(6) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Notification of Canadian Hydrographic Service on completion

(7) If works of the class established by subsection (1) are over or across a charted navigable water, on completion of the construction or placement of the works the owner of the works must, in writing, notify the Canadian Hydrographic Service that the works have been constructed or placed:

Notification of Canadian Coast Guard on removal

(8) If works of the class established by subsection (2) are in a charted navigable water, on removal of the works the owner of the works must, in writing, notify a Canadian Coast Guard Marine Communications and Traffic Services Centre that the works have been removed.

Restoration of contours

- (9) The owner of works of the class established by subsection (1) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsec-
 - (b) the removal of works of the class established by subsection (2).

Re-laying works

- (10) Subject to subsection (11), if works of the class established by subsection (1) no longer lie on or under the bed of the navigable water, the owner of the works must, as soon as feasible,
 - (a) re-lay the works so that they lie on or under the bed; or
 - (b) remove the works.

Dangers to navigation

(11) The owner must immediately take the action referred to in subsection (10) if the works become a danger to navigation because they no longer lie on or under the bed of the navigable water.

d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:

- a) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m;
- b) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m;
- c) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m;
- d) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.
- (6) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

d'ouvrages temporaires

(7) Si des ouvrages de la catégorie établie par le paragraphe (1) passent au-dessus des eaux navigables cartographiées ou à travers celles-ci, leur propriétaire notifie par écrit, dès l'achèvement de la construction ou du placement des ouvrages, au Ser- l'achèvement vice hydrographique du Canada, que les ouvrages ont été construits ou placés.

Notification au Service hydrographique du Canada

(8) Si des ouvrages de la catégorie établie par le Notification à la paragraphe (2) sont situés dans des eaux navigables cartographices, leur propriétaire notifie par écrit, des leur enlèvement, à un centre des Services de com- l'enlèvement munications et de trafic maritimes de la Garde côtière canadienne, que les ouvrages ont été enlevés.

Garde côtière canadienne

(9) Le propriétaire d'ouvrages de la catégorie éta- Remise en état blie par le paragraphe (1) veille à ce que les contours des contours du lit des caux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel des l'achèvement de la construction ou de l'emplacement de ces ouvrages :

- a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (2);
- b) l'enlèvement d'ouvrages de la catégorie établie par le paragraphe (2).
- (10) Sous réserve du paragraphe (11), si des Reposer les ouvrages de la catégorie établie par le paragraphe (1) ne reposent plus sur ou sous le lit des eaux navigables, leur propriétaire est tenu, selon le cas :

a) de les reposer des que possible sur ou sous le

- b) de les enlever dès que possible.
- (11) Le propriétaire prend immédiatement la Dangers pour la mesure visée au paragraphe (10) si les ouvrages navigation deviennent un danger pour la navigation parce qu'ils ne reposent plus sur ou sous le lit des eaux navigables.

PIPELINES BURIED UNDER THE BED OF NAVIGABLE WATER

Class established

- 8. (1) Pipelines that are buried under the bed of a navigable water and that are built or placed using a trenched method are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the width of the navigable water at the site of the crossing is less than 50 m when measured from the ordinary high-water mark on one side of the navigable water to the ordinary high-water mark on the other side; and
 - (b) the construction or placement of the works is completed within two weeks after the day on which construction or placement of the works started.

Temporary class works established

(2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works include or consist of cables that do not lie on the bed of the navigable

Prior notification of Canadian Coast Guard

(3) If works of the class established by subsection (2) are in a charted navigable water, the owner of the works must, at least 48 hours before the construction or placement of the works starts, in writing notify a Canadian Coast Guard Marine Communications and Traffic Services Centre of the day on which construction or placement of the works is expected

During construction or placement

- (4) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site; and
 - (b) if the works are under a river, a stream, a creek or similar navigable water that, when measured from the ordinary high-water mark on one side of the navigable water to the ordinary high-water mark on the other side, is of a width set out in column 1 of the table to this subsection, that signs stating "Construction Ahead" and "Travaux de construction" that are legible from at least 50 m. are in place, upstream and downstream from the work site, at the minimum distance set out in column 2.

TABLE

	Column 1	Column 2
Item	Width of Navigable Water	Minimum Distance
L.	Less than 10 m	25 m
2.	10 m or more but less than 20 m	50 m
3.	20 m or more but less than 50 m	100 m

PIPELINES ENFOUIS SOUS LE LIT DES FAUX NAVIGABLES

- 8. (1) Les pipelines enfouis sous le lit des eaux Catégorie navigables qui sont construits ou placés selon la méthode de construction avec tranchée sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies:
 - a) la largeur des caux navigables au lieu de passage, mesurée de la laisse des hautes eaux ordinaires d'un côté des eaux navigables à la laisse des hautes eaux ordinaires de l'autre côté, est inférieure à 50 m;
 - b) la construction ou l'emplacement des ouvrages sont terminés dans les deux semaines suivant la date où commencent leur construction ou leur emplacement.
- (2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils comprennent des câbles, ou sont constitués de câbles, qui ne reposent pas sur le lit des eaux navigables.
- (3) Si des ouvrages de la catégorie établie par le paragraphe (2) sont situés dans des eaux navigables cartographices, leur propriétaire notifie par écrit, au moins quarante-huit heures avant le commencement de la construction ou de l'emplacement des ouvrages, à un centre des Services de communications et de trafic maritimes de la Garde côtière canadienne, la date prévue du commencement de la construction ou de l'emplacement des ouvrages.
- (4) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les conditions suivantes soient respectées;
 - a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier;
 - b) si les ouvrages sont situés sous des rivières ou des fleuves, des ruisseaux, des criques ou des eaux navigables semblables qui, lorsqu'ils sont mesurés de la laisse des hautes eaux ordinaires d'un côté des eaux à la laisse des hautes eaux ordinaires de l'autre côté, sont d'une largeur figurant à la colonne 1 du tableau du présent paragraphe, des panneaux portant les mentions « Travaux de construction » et « Construction Ahead », lisibles à une distance d'au moins 50 m, sont en place en amont et en aval du chantier, à la distance minimale figurant à la colonne 2.

TABLEAU

	Colonne 1	Colonne 2	
Article	Largeur des eaux navigables	Distance minimale	
1	Moins de 10 m	25 m	
2	10 m ou plus mais moins de 20 m	50 m	
3.	20 m ou plus mais moins de 50 m	100 m	

temporaires

Notification préalable à la Garde côtière

construction ou l'emplacement

During construction or placement of temporary works

- (5) During the construction or placement of works of the class established by subsection (2), the owner of the works must ensure that
 - (a) if the works are on, over or across a navigable water, the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
 - (b) if the works are in or through a navigable water, the works are marked with cautionary buoys that are lighted from dusk to dawn and during periods of restricted visibility and are
 - (i) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

Removal of temporary works

(6) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Notification of Canadian Hydrographic Service on completion

(7) If works of the class established by subsection (1) are under the bed of a charted navigable water, on completion of the construction or placement of the works the owner of the works must, in writing, notify the Canadian Hydrographic Service that the works have been constructed or placed.

- (5) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par le paragraphe (2), leur propriétaire veille à ce que les conditions suivantes soient respectées:
 - a) si les ouvrages sont situés sur les eaux navigables, à travers celles-ci ou au-dessus de cellesci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite, par des feux clignotants jaunes qui sont conformes aux exigences suivantes:
 - (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de
 - b) si les ouvrages sont situés dans les eaux navigables ou à travers le cours de celles-ci, ils sont indiqués par des bouées d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:
 - (i) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.
- (6) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci soient complètement enlevés des l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.
- (7) Si des ouvrages de la catégorie établie par le Notification au paragraphe (1) sont situés sous le lit d'eaux navigables cartographiées, leur propriétaire notifie par du Canada écrit, dès l'achèvement de la construction ou du pla- des cement des ouvrages, au Service hydrographique du l'achèvement Canada, que les ouvrages ont été construits ou placés.

construction ou **Pemplacement** d'ouvrages temporaires

d'ouvrages temporaires

Service hydrographique Notification of Canadian Coast Guard on removal

(8) If works of the class established by subsection (2) are in a charted navigable water, on removal of the works the owner of the works must, in writing, notify a Canadian Coast Guard Marine Communications and Traffic Services Centre that the works have been removed.

Restoration of

- (9) The owner of works of the class established by subsection (1) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsection (2); or
 - (b) the removal of works of the class established by subsection (2).

Re-laying works

- (10) Subject to subsection (11), if works of the class established by subsection (1) no longer lie on or under the bed of the navigable water, the owner of the works must, as soon as feasible,
 - (a) re-lay the works so that they lie on or under the hed; or
 - (b) remove the works.

Dangers to navigation

(11) The owner must immediately take the action referred to in subsection (10) if the works become a danger to navigation because they no longer lie on or under the bed of the navigable water.

PIPELINES AND POWER OR COMMUNICATION CABLES ATTACHED TO EXISTING WORKS

Class established

9. (1) Pipelines and cables that are attached to an existing work that was approved under the Act or is referred to in subsection 4(1) or (2) or section 8 of the Act, are established as a class of works for the purposes of subsection 5.1(1) of the Act if the works do not increase the interference with navigation caused by the existing work.

Temporary works - class established

(2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works are in, on, under, through or across a navigation channel.

During construction or placement

- (3) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site;
 - (b) if the works are on, over or across a navigable water, that the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,

(8) Si des ouvrages de la catégorie établie par le Notification à la paragraphe (2) sont situés dans des eaux navigables cartographiées, leur propriétaire notifie par écrit, dès leur enlèvement, à un centre des Services de communications et de trafic maritimes de la Garde côtière canadienne, que les ouvrages ont été enlevés.

Garde côtière canadienne l'enlèvement

(9) Le propriétaire d'ouvrages de la catégorie éta- Remise en état blie par le paragraphe (1) veille à ce que les contours du lit des eaux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel dès l'achèvement de la construction ou de l'emplacement de ces ouvrages :

des contours

- a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (2);
- b) l'enlevement d'ouvrages de la catégorie établie par le paragraphe (2).
- (10) Sous réserve du paragraphe (11), si des Reposerles ouvrages de la catégorie établie par le paragraphe (1) ne reposent plus sur ou sous le lit des eaux navigables, leur propriétaire est tenu, selon le cas :
 - a) de les reposer des que possible sur ou sous le
 - b) de les enlever dès que possible.
- (11) Le propriétaire prend immédiatement la Dangers pour la mesure visée au paragraphe (10) si les ouvrages navigation deviennent un danger pour la navigation parce qu'ils ne reposent plus sur ou sous le lit des caux navigables.

PIPELINES ET CABLES - ÉNERGIE ET TÉLÉCOMMUNICATIONS - FIXÉS À DES OUVRAGES EXISTANTS

- 9. (1) Les pipelines et les câbles qui sont fixés à un Catégorie ouvrage existant qui a été approuvé en vertu de la Loi ou est visé aux paragraphes 4(1) ou (2) ou à l'article 8 de la Loi sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les ouvrages ne gênent pas la navigation plus que le fait l'ouvrage existant.
- (2) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci.

temporaires

- (3) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (1) ou (2), leur propriétaire veille à ce que les conditions suivantes soient respectées :
 - a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier,
 - b) dans le cas des ouvrages qui sont situés sur les eaux navigables, à travers celles-ci ou au-dessus de celles-ci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite,

construction ou l'emplacement

- (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
- (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
- (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
- (c) in the case of a river, a stream, a creek or similar navigable water, that signs stating "Construction Ahead" and "Travaux de construction" that are legible from at least 50 m are in place 50 m upstream and downstream from the work site.

Removal of temporary works

(4) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Works in disrepair

- (5) If works of the class established by subsection (1) become a danger to navigation because of disrepair, the owner of the works must immediately
 - (a) repair the works so that they are no longer a danger to navigation; or
 - (b) remove the works.

WORKS WITHIN A BOOMED-OFF AREA UPSTREAM OR DOWNSTREAM OF AN EXISTING WORK FOR WATER CONTROL

Class established

- 10. Works within a boomed-off area upstream or downstream of an existing work for water control are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the existing work for water control was approved under the Act or is referred to in subsection 4(1) or (2) of the Act;
 - (b) the boom was approved under the Act or is referred to in subsection 4(1) or (2) of the Act;
 - (c) the works do not adversely affect the efficacy of the boom:
 - (d) the works do not after the level or flow of the navigable water;
 - (e) the works are not related to rebuilding or alterations to the boom or the existing work for water control; and
 - (f) the owner of the works is also the owner of the boom or the existing work for water control.

par des feux clignotants jaunes qui sont conformes aux exigences suivantes:

- (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
- (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
- (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
- (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m:
- c) dans le cas des rivières ou des fleuves, des ruisseaux, des criques ou des eaux navigables semblables, des panneaux portant les mentions « Travaux de construction » et « Construction Ahead », lisibles à une distance d'au moins 50 m, sont en place à 50 m en amont et en aval du chantier.
- (4) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci d'ouvrages soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

(5) Si des ouvrages de la catégorie établie par le Ouvrages en paragraphe (1) deviennent un danger pour la naviga- mauvais état tion en raison de leur mauvais état, leur propriétaire est tenu, selon le cas:

- a) de les réparer immédiatement pour qu'ils ne constituent plus un danger pour la navigation;
- b) de les enlever immédiatement.

OUVRAGES RÉALISÉS DANS UNE SECTION BORDÉE D'UNE BARRIÈRE FLOTTANTE EN AMONT OU EN AVAL D'UN OUVRAGE EXISTANT DE RÉGULARISATION DES EAUX

- 10. Les ouvrages réalisés dans une section bordée Catégorie d'une barrière flottante en amont ou en aval d'un d'ouvrages ouvrage existant de régularisation des eaux sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :
 - a) l'ouvrage existant de régularisation des eaux a été approuvé en vertu de la Loi ou est visé aux paragraphes 4(1) ou (2) de la Loi;
 - b) la barrière flottante est approuvée en vertu de la Loi ou est visée aux paragraphes 4(1) ou (2) de la Loi;
 - c) les ouvrages ne compromettent pas l'efficacité de la barrière flottante;
 - d) ils ne modifient ni le niveau ni le débit des caux navigables;
 - e) ils ne visent pas à reconstruire ou à modifier la barrière flottante ou l'ouvrage existant de régularisation des eaux;

OUTFALLS AND WATER INTAKES

Definitions

11. (1) The following definitions apply in this section.

"crib" « encoltrement »

"crib" means pieces of timber affixed together to form bays or cells that are filled with stones or

"headpond" « bassin d'amont »

the construction of a dam or weir.

"outfall" « émissuire »

"weir" « deversoir »

"weir" means a low dam or barrier that raises the level or diverts the flow of a navigable water.

Class established

- (2) Outfalls and water intakes are established as a class of works for the purposes of subsection 5.1(1)
 - (a) the works do not include a crib or other outfall or intake structure, such as a fish screen, an anchor, a collar or a weight, that extends vertically above the bed of the navigable water more than
 - (i) in the case of a navigable water of less than 15 m in depth when measured from the ordinary high-water mark, 5% of the depth of the water when measured from the ordinary highwater mark, or
 - (ii) in any other case, 1 m;
 - (b) the works do not alter the level or flow of the navigable water;
 - (c) in the case of a charted navigable water, the works are not within 30 m of a navigation chan-
 - (d) the works are not associated with a dam, weir or headpond, including a proposed dam, weir or headpond.

Temporary works

(3) Temporary works that are required for the construction or placement of works of the class established by subsection (2) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works are in, on, over, under, through or across a navigation channel.

During construction or placement

- (4) During the construction or placement of works of the class established by subsection (2) or (3), the owner of the works must ensure
 - (a) that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site; and
 - (b) that no floating pipes are left unattended or unsupervised.

f) le propriétaire des ouvrages est également le propriétaire de la barrière flottante ou de l'ouvrage existant de régularisation des eaux.

ÉMISSAIRES ET PRISES D'EAU

11. (1) Les définitions qui suivent s'appliquent au Définitions présent article.

construction d'un barrage ou d'un déversoir.

« bassin d'amont » Réservoir d'eau créé par la «bassin d'amont» "headpand"

"headpond" means a reservoir of water created by

« déversoir » Barrage ou mur peu élevés qui augmentent le niveau des eaux navigables ou en dévient l'écoulement.

« déversoir » "weir"

"outfall" does not include a diffuser-type outfall.

« émissaire » Sont exclus des émissaires les émis- « émissaire » saires de type diffuseur.

"outfall"

« encoffrement » Pièces de bois d'œuvre fixées les unes aux autres pour former des baies ou des cellules qui sont remplies de pierres ou de béton.

« encoffrement »

d'ouvrages

- (2) Les émissaires et les prises d'eau sont établis Catégorie comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :
 - a) les ouvrages ne comprennent ni encoffrement ni aucune autre structure d'émissaire ou de prise, comme une claie à poisson, une ancre, un collet, ou un poids, s'étendant verticalement au-dessus du lit des eaux navigables :
 - (i) dans le cas d'eaux navigables d'une profondeur de moins de 15 m, mesurée de la laisse des hautes eaux ordinaires, au-delà de 5 % de la profondeur des eaux, mesurée de la laisse des hautes eaux ordinaires,
 - (ii) dans tous les autres cas, au-delà de 1 m;
 - b) ils ne modifient ni le niveau ni le débit des eaux navigables;
 - c) dans le cas d'eaux navigables cartographiées, les ouvrages ne sont pas situés à 30 m ou moins d'un chenal de navigation;
 - d) ils ne sont associés ni à un barrage, ni à un déversoir, ni à un bassin d'amont, y compris un barrage, un déversoir ou un bassin d'amont projetés.
- (3) Les ouvrages temporaires exigés pour la Catégorie construction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (2) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils sont situés dans un chenal de navigation, sur, sous ou à travers celui-ci, ou au-dessus de celui-ci.
 - temporaires
- (4) Durant la construction ou l'emplacement Durant la d'ouvrages de la catégorie établie par les paragraphes (2) ou (3), leur propriétaire veille à ce que les conditions suivantes soient respectées :
 - a) les bateaux peuvent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier;
 - b) les tuyaux flottants ne sont laisses ni sans surveillance ni sans supervision.

construction ou l'emplacement

Removal of temporary works

(5) The owner of works of the class established by subsection (3) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Restoration of contours

- (6) The owner of works of the class established by subsection (2) must, if the contours of the bed of the navigable water were disturbed by either of the following, ensure that the contours are restored to their natural state on completion of the construction or placement of the works:
 - (a) the placement or construction of the works or of works of the class established by subsection (3); or
 - (b) the removal of works of the class established by subsection (3).

Re-laying piping

- (7) Subject to subsection (8), if the piping of works of the class established by subsection (2) no longer lies on the bed of the navigable water, the owner of the works must, as soon as feasible,
 - (a) re-lay the piping so that it lies on the bed; or
 - (b) remove the works.

Dangers to navigation

(8) The owner must immediately take the action referred to in subsection (7) if the piping becomes a danger to navigation because it no longer lies on the bed of the navigable water.

DREDGING

Class established

- 12. (1) Dredging is established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the works are done in order to maintain the width or depth of the navigable water;
 - (b) all dredged materials are disposed of
 - (i) above the ordinary high-water mark, or
 - (ii) in water where the disposal is authorized by or under an Act of Parliament;
 - (c) the works do not use any suction dredging that involves the use of floating or submerged pipes;
 - (d) the works have no cables that cross on, over or through any portion of the navigable water; and
 - (e) the works do not include blasting.

Temporary works - class established

(2) Temporary works that are required for the construction or placement of works of the class established by subsection (1) are established as a class of works for the purposes of subsection 5.1(1) of the Act unless the temporary works are in, on, over, under, through or across a navigation channel marked by the federal government, a provincial government or an agency of one of those governments.

Prior notification of Canadian Coast Guard

(3) If works of the class established by subsection (2) are in a charted navigable water, the owner of the works must, at least 48 hours before the construction or placement of the works starts, in writing

(5) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (3) veille à ce que ceux-ei d'ouvrages soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

(6) Le propriétaire d'ouvrages de la catégorie éta- Remise en état blie par le paragraphe (2) veille à ce que les contours du lit des eaux navigables qui ont été perturbés pour l'une ou l'autre des raisons ci-après soient remis à leur état naturel dès l'achèvement de la construction ou de l'emplacement de ces ouvrages :

- a) la construction ou l'emplacement des ouvrages ou d'ouvrages de la catégorie établie par le paragraphe (3);
- b) l'enlevement d'ouvrages de la catégorie établie par le paragraphe (3).
- (7) Sous réserve du paragraphe (8), si la tuyauterie Reposer la des ouvrages de la catégorie établie par le paragraphe (2) ne repose plus sur le lit des eaux navigables, le propriétaire de ces ouvrages est tenu, selon

tuyauterie

- a) de reposer la tuyauterie dès que possible sur le lit;
- b) d'enlever les ouvrages dès que possible.
- (8) Le propriétaire prend immédiatement la me-Danger pour la sure visée au paragraphe (7) si la tuyauterie devient navigation un danger pour la navigation parce qu'elle ne repose plus sur le lit des eaux navigables.

DRAGAGE

12. (1) Le dragage est établi comme catégorie Catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont réunies :

server la largeur ou la profondeur des eaux navigables; b) tous les déblais de dragage sont rejetés, selon le

a) les ouvrages sont réalisés dans le but de con-

- (i) au-dessus de la laisse des hautes eaux
- (ii) dans des caux où le rejet est autorisé sous le régime d'une loi fédérale;
- c) les ouvrages ne font pas appel à du dragage par succion comportant l'utilisation de tuyaux flottants ou submergés;
- d) ils ne comportent pas de câbles passant sur une partie des eaux navigables, au-dessus de celle-ci ou à travers le cours de celle-ci;
- e) ils ne comportent pas de sautage.

cas:

- (2) Les ouvrages temporaires exigés pour la cons- Catégorie truction ou l'emplacement d'ouvrages de la catégorie établie par le paragraphe (1) sont établis comme catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi, sauf s'ils sont situés dans un chenal de navigation indiqué par le gouvernement fédéral ou un gouvernement provincial ou un organisme d'un de ceux-ci, sur, sous ou à travers celui-ci, ou au-dessus de celui-ci;
- (3) Si des ouvrages de la catégorie établie par le Notification paragraphe (2) sont situés dans des eaux navigables cartographices, leur propriétaire notifie par écrit, au moins quarante-huit heures avant le commencement

temporaires

Garde côtière canadienne

notify a Canadian Coast Guard Marine Communications and Traffic Services Centre of the day on which construction or placement of the works is expected

During construction or placement

(4) During the construction or placement of works of the class established by subsection (1) or (2), the owner of the works must ensure that vessels can navigate safely through or around the work site or, if navigation is interrupted by any activity related to the construction or placement, that suitable means, such as a portage, exist to allow vessels to resume navigation on the other side of the work site.

During construction or placement of temporary works

- (5) During the construction or placement of works of the class established by subsection (2), the owner of the works must ensure that
 - (a) if the works are on, over or across a navigable water, the works are marked, from dusk to dawn and during periods of restricted visibility, with yellow flashing lights that are
 - (i) located on the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located on each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located on each end of the works and at any other location on the works so that the lights are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located on each end of the works and at any other location on the works so that the lights are spaced not more than 30 m apart, if the works are more than 30 m in length; and
 - (b) if the works are in or through a navigable water, the works are marked with cautionary buoys that are lighted from dusk to dawn and during periods of restricted visibility and are
 - (i) located at the end of the works that is farthest from the nearest bank or shore, if the works are not more than 3 m in length,
 - (ii) located at each end of the works, if the works are more than 3 m in length but not more than 20 m in length,
 - (iii) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 20 m apart, if the works are more than 20 m in length but not more than 30 m in length, or
 - (iv) located at each end of the works and at any other location alongside the works so that the buoys are spaced not more than 30 m apart, if the works are more than 30 m in length.

de la construction ou de l'emplacement des ouvrages, à un centre des Services de communications et de trafic maritimes de la Garde cotière canadienne, la date prévue du commencement de la construction ou de l'emplacement des ouvrages.

- (4) Durant la construction ou l'emplacement d'ou- Durant la vrages de la catégorie établie par le paragraphe (1) ou (2), leur propriétaire veille à ce que les bateaux puissent naviguer de façon sécuritaire à travers le chantier ou autour de celui-ci ou, si la navigation est interrompue par toute activité liée à la construction ou à l'emplacement, à ce qu'il existe un moyen approprié, comme le portage, pour leur permettre de reprendre la navigation de l'autre côté du chantier.
- (5) Durant la construction ou l'emplacement d'ou- Durant la vrages de la catégorie établie par le paragraphe (2), leur propriétaire veille à ce que les conditions suivantes soient respectées:
 - a) si les ouvrages sont situés sur des caux navigables, à travers celles-ci ou au-dessus de cellesci, ils sont indiqués, du crépuscule à l'aube et durant les périodes de visibilité réduite, par des feux elignotants jaunes qui sont conformes aux exigences suivantes !
 - (i) ils sont situés sur l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) ils sont situés sur chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-ci de façon à n'être pas espacés de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) ils sont situés sur chacune des extrémités des ouvrages et à tout autre endroit sur ceux-cide façon à n'être pas espacés de plus de 30 m, si les ouvrages sont d'une longueur de plus de
 - b) si les ouvrages sont situés dans les eaux navigables ou à travers le cours de celles-ci, ils sont indiqués par des bouées d'avertissement qui sont illuminées du crépuscule à l'aube et durant les périodes de visibilité réduite et qui sont conformes aux exigences suivantes:
 - (i) elles sont situées à l'extrémité des ouvrages qui est la plus loin de la berge ou de la rive la plus proche, si les ouvrages sont d'une longueur d'au plus 3 m,
 - (ii) elles sont situées à chacune des extrémités des ouvrages, si les ouvrages sont d'une longueur de plus de 3 m mais d'au plus 20 m,
 - (iii) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de façon à n'être pas espacées de plus de 20 m, si les ouvrages sont d'une longueur de plus de 20 m mais d'au plus 30 m,
 - (iv) elles sont situées à chacune des extrémités des ouvrages et à tout autre endroit le long de ceux-ci de facon à n'être pas espacées de plus de 30 m, si les ouvrages sont d'une longueur de plus de 30 m.

l'emplacement

construction on l'emplacement temporaires

Removal of temporary works

(6) The owner of works of the class established by subsection (2) must ensure that they are completely removed on completion of the construction or placement of the works for which they were required.

Contouring

(7) The owner of works of the class established by subsection (1) must ensure that the bed of the navigable water is, on completion of the construction or placement of the works, contoured to prevent hazards to navigation.

Notification of Canadian Coast Guard on completion

(8) If works of the class established by subsection (1) or (2) are in a charted navigable water, on completion of the construction or placement of the works the owner of the works must, in writing, notify a Canadian Coast Guard Marine Communications and Traffic Services Centre that the works have been completed,

MOORING SYSTEMS

Definitions

"length"

"mooring

«système

system"

13. (1) The following definitions apply in this

"length" means, in respect of a vessel, the distance between the fore and aft extremities of the vessel.

"mooring system" means a system that is used to secure a vessel and that consists of an anchor that is set in or on the bed of a navigable water, a single d'amarrage» anchor line, a single buoy and a mooring line to attach to a vessel,

"swing area" d'éviture »

"swing area" means the diameter of a circle created by the swinging of a vessel moored to a mooring system.

Class established

- (2) Mooring systems are established as a class of works for the purposes of subsection 5.1(1) of the Act if
 - (a) the swing area of the works is not
 - (i) within 20 m of a work, other than a pipeline or an aerial or submarine cable, that is not owned by the owner of the works,
 - (ii) within 20 m of the swing area of another work of the class established by this subsection,
 - (iii) within 50 m of a marina, public launchramp or navigation channel;
 - (b) the works are not associated with an existing or proposed marina;
 - (c) the width of the navigable water is more than 100 m when measured from the ordinary highwater mark on one side of the water to the ordinary high-water mark on the other side; and
 - (d) the buoy has the following characteristics:
 - (i) the name, address and telephone number of the owner of the works is displayed on it in a conspicuous location and in a legible manner,
 - (ii) the part of the buoy that shows above the surface of the water is at least 15.25 cm wide and at least 30.5 cm high,
 - (iii) the top third of the buoy is orange and the rest of it is white, and

(6) Le propriétaire d'ouvrages de la catégorie éta- Enlèvement blie par le paragraphe (2) veille à ce que ceux-ci d'ouvrages soient complètement enlevés dès l'achèvement de la construction ou de l'emplacement des ouvrages pour lesquels ils étaient exigés.

temporaires

(7) Le propriétaire d'ouvrages de la catégorie éta- Aménagement blie par le paragraphe (1) veille à ce que les contours des contours du lit des eaux navigables soient aménagés, dès l'achèvement de la construction ou de l'emplacement de ces ouvrages, pour prévenir les dangers pour la navigation.

(8) Si des ouvrages de la catégorie établie par le Notification à la paragraphe (1) ou (2) sont situés dans des eaux navi- Garde côtière gables cartographiées, leur propriétaire notifie par des écrit, dès l'achèvement de la construction ou de l'achèvement l'emplacement de ces ouvrages, à un centre des Services de communications et de trafic maritimes de la Garde côtière canadienne, que les ouvrages ont été enlevés.

Systèmes d'amarrage

13. (1) Les définitions qui suivent s'appliquent au Définitions

«aire d'évitage» Le diamètre d'un cercle créé par «aire le mouvement d'un bateau arrimé à un système d'amarrage.

d'évitage » "swing area"

«longueur» S'agissant d'un bateau, la distance mesurée entre l'extrémité avant et l'extrémité arrière du

« longueur »

« système d'amarrage » Système qui est utilisé pour « système arrimer un bateau et qui consiste en une ancre mouil- d'amarrage» lée dans ou sur le lit d'eaux navigables, une seule system" ligne d'ancrage, une seule bouée et une ligne d'amarre qui s'attache à un bateau.

(2) Les systèmes d'amarrage sont établis comme Catégorie catégorie d'ouvrages pour l'application du paragraphe 5.1(1) de la Loi si les conditions suivantes sont reunies:

- a) l'aire d'évitage des ouvrages n'est :
- (i) ni là 20 m ou moins d'un ouvrage, autre qu'un pipeline ou un câble aérien ou sousmarin, qui n'appartient pas au propriétaire des ouvrages,
- (ii) ni à 20 m ou moins d'une aire d'évitage d'un autre ouvrage de la catégorie établie par le présent paragraphe,
- (iii) ni à 50 m ou moins d'une marina, d'une rampe de mise à l'eau publique ou d'un chenal de navigation;
- b) les ouvrages ne sont pas associés à une marina existante ou projetée;
- c) la largeur des eaux navigables, mesurée de la laisse des hautes eaux ordinaires d'un côté des eaux à la laisse des hautes eaux ordinaires de l'autre côté, est supérieure à 100 m;
- d) la bouée possède les caractéristiques suivantes :
 - (i) elle porte bien en vue une inscription lisible, indiquant les nom, adresse et numéro de téléphone du propriétaire des ouvrages,
 - (ii) sa partie qui émerge de l'eau mesure au moins 15,25 cm de largeur et au moins 30,5 cm de hauteur,

(iv) the buoy displays, on opposite sides, the capital letters "PRIV", which are in black and are as large as is practicable for the size of the

Swing area

- (3) For the purposes of subparagraphs (2)(a)(i) and (ii), the swing area of a vessel is considered to be the area set out in column 1 of the table to this subsection when the navigable water has the depth set out in column 2
 - (a) at the higher high-water mean tidewater level, in the case of tidal waters; or
 - (b) at the 10-year high-water level, in any other

TABLE

	Column 1	Column 2
ltem	Swing Area	Depth of Navigable Water
I.	50 m	6 m or less
2	70 m	More than 6 m but not more than 10 m
3.	80 m	More than 10 m but not more than 14 m
4.	100 m	More than 14 m

Buoys and anchors

- (4) The owner of the works must
- (a) ensure that
 - (i) the buoy maintains the characteristics described in paragraph (2)(d) during the navigation season, and
 - (ii) the anchor remains in the position in which it was set in or on the bed of the navigable water; and
- (b) comply with any order made under section 5 of the Private Buoy Regulations in respect of the buoy.

Mooning of vessels and removal of works

- (5) The owner of the works
- (a) must not moor, or permit the mooring of, a vessel that is more than 12 m in length to the works; and
- (b) must remove the works if
 - (i) any part of the works is removed, or
 - (ii) during any two-year period, no vessel has moored to the works.

COMING INTO FORCE

3. This Order comes into force on the day on which it is made.

- (iii) son tiers supérieur est orange et le reste est
- (iv) elle porte, sur des côtés opposés, les lettres majuscules «PRIV», lesquelles sont en noir et sont aussi grandes que possible, compte tenu des dimensions de la bouée.
- (3) Pour l'application des sous-alinéas (2)a)(i) et Aire d'évitage (ii), l'aire d'évitage d'un bateau est réputée être celle figurant à la colonne 1 du tableau du présent paragraphe lorsque les eaux navigables sont d'une profondeur figurant à la colonne 2, dans les cas suivants:
 - a) dans le cas des caux à marée, au niveau de la ligne de la pleine mer supérieure de marée
 - b) dans tout autre cas, au niveau d'eau le plus élevé en dix ans.

TABLEAU

	Colonne 1	Colonne 2	
Article	Aire d'évitage	Profondeur des eaux navigables	
1=	.50 m	6 m ou moins	
2	70 m	Plus de 6 m mais 10 m ou moins	
3.	80 m	Plus de 10 m mais 14 m ou moins	
4.	100 m	Plus de 14 m	

- (4) Le propriétaire des ouvrages est tenu :
- a) de veiller à ce que les conditions suivantes soient respectées:
 - (i) la bouée conserve les caractéristiques figurant à l'alinéa (2)d) durant la saison de navigation.
 - (ii) l'ancre reste où elle a été mouillée dans ou sur le lit des caux navigables;
- b) de se conformer aux ordres donnés en vertu de l'article 5 du Règlement sur les bouées privées concernant la bouée.
- (5) Le propriétaire des ouvrages :
- a) ne peut ni amarrer, ni permettre d'amarrer, aux enlèvement ouvrages un bateau d'une longueur de plus de d'ouvrages 12 m de longueur;
- b) est tenu d'enlever les ouvrages dans les cas suivants:
 - (i) une partie des ouvrages est enlevée,
 - (ii) durant une période de deux ans, aucun bateau n'a été amarré aux ouvrages.

ENTRÉE EN VIGUEUR

3. Le présent arrêté entre en vigueur à la date de sa prise.

Boučes et

Amarrage d'un

bateau et

ancres

[10-Fee]