
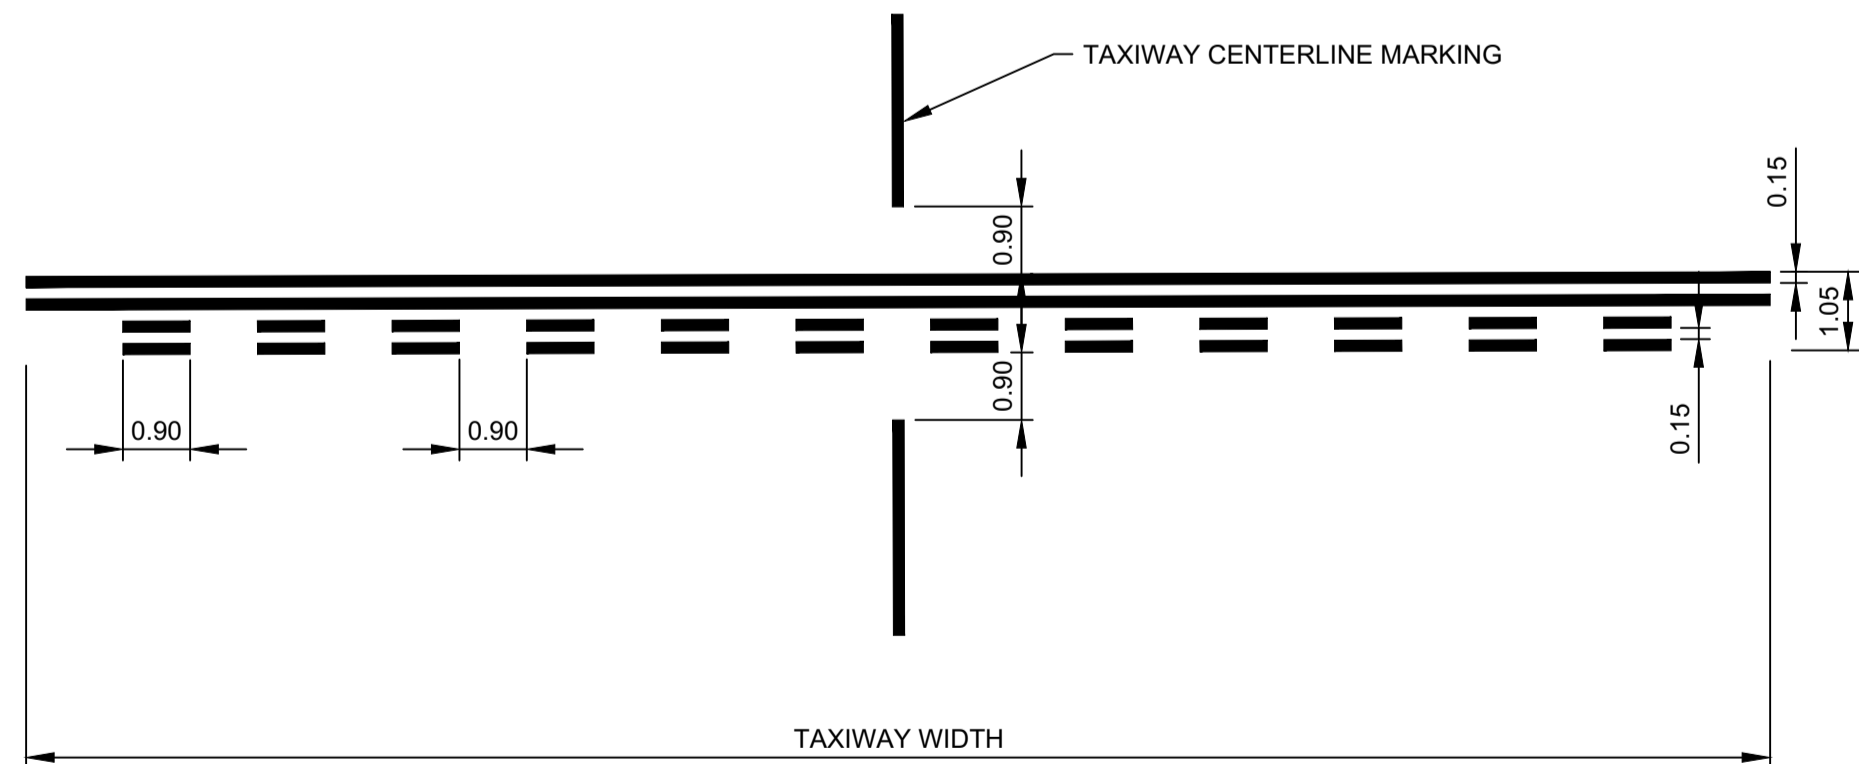
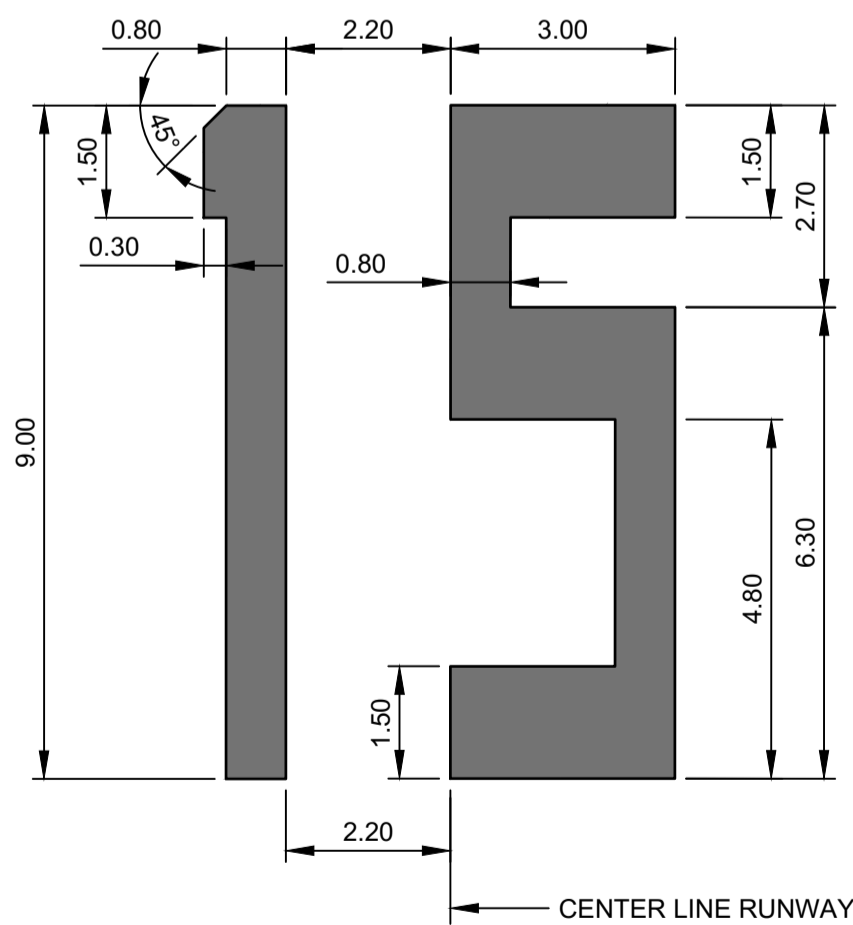


PLOT DATE: 6/12/2019 5:12:31 PM  
SAVE DATE: 6/12/2019 5:10:00 PM  
DWG PATH: \\s-wp-fs-01\projects\2018\4136-01-airport\_design\working\_dwg\4136-01-c-mp-paint.dwg

PWOSC - A1 - 841X394

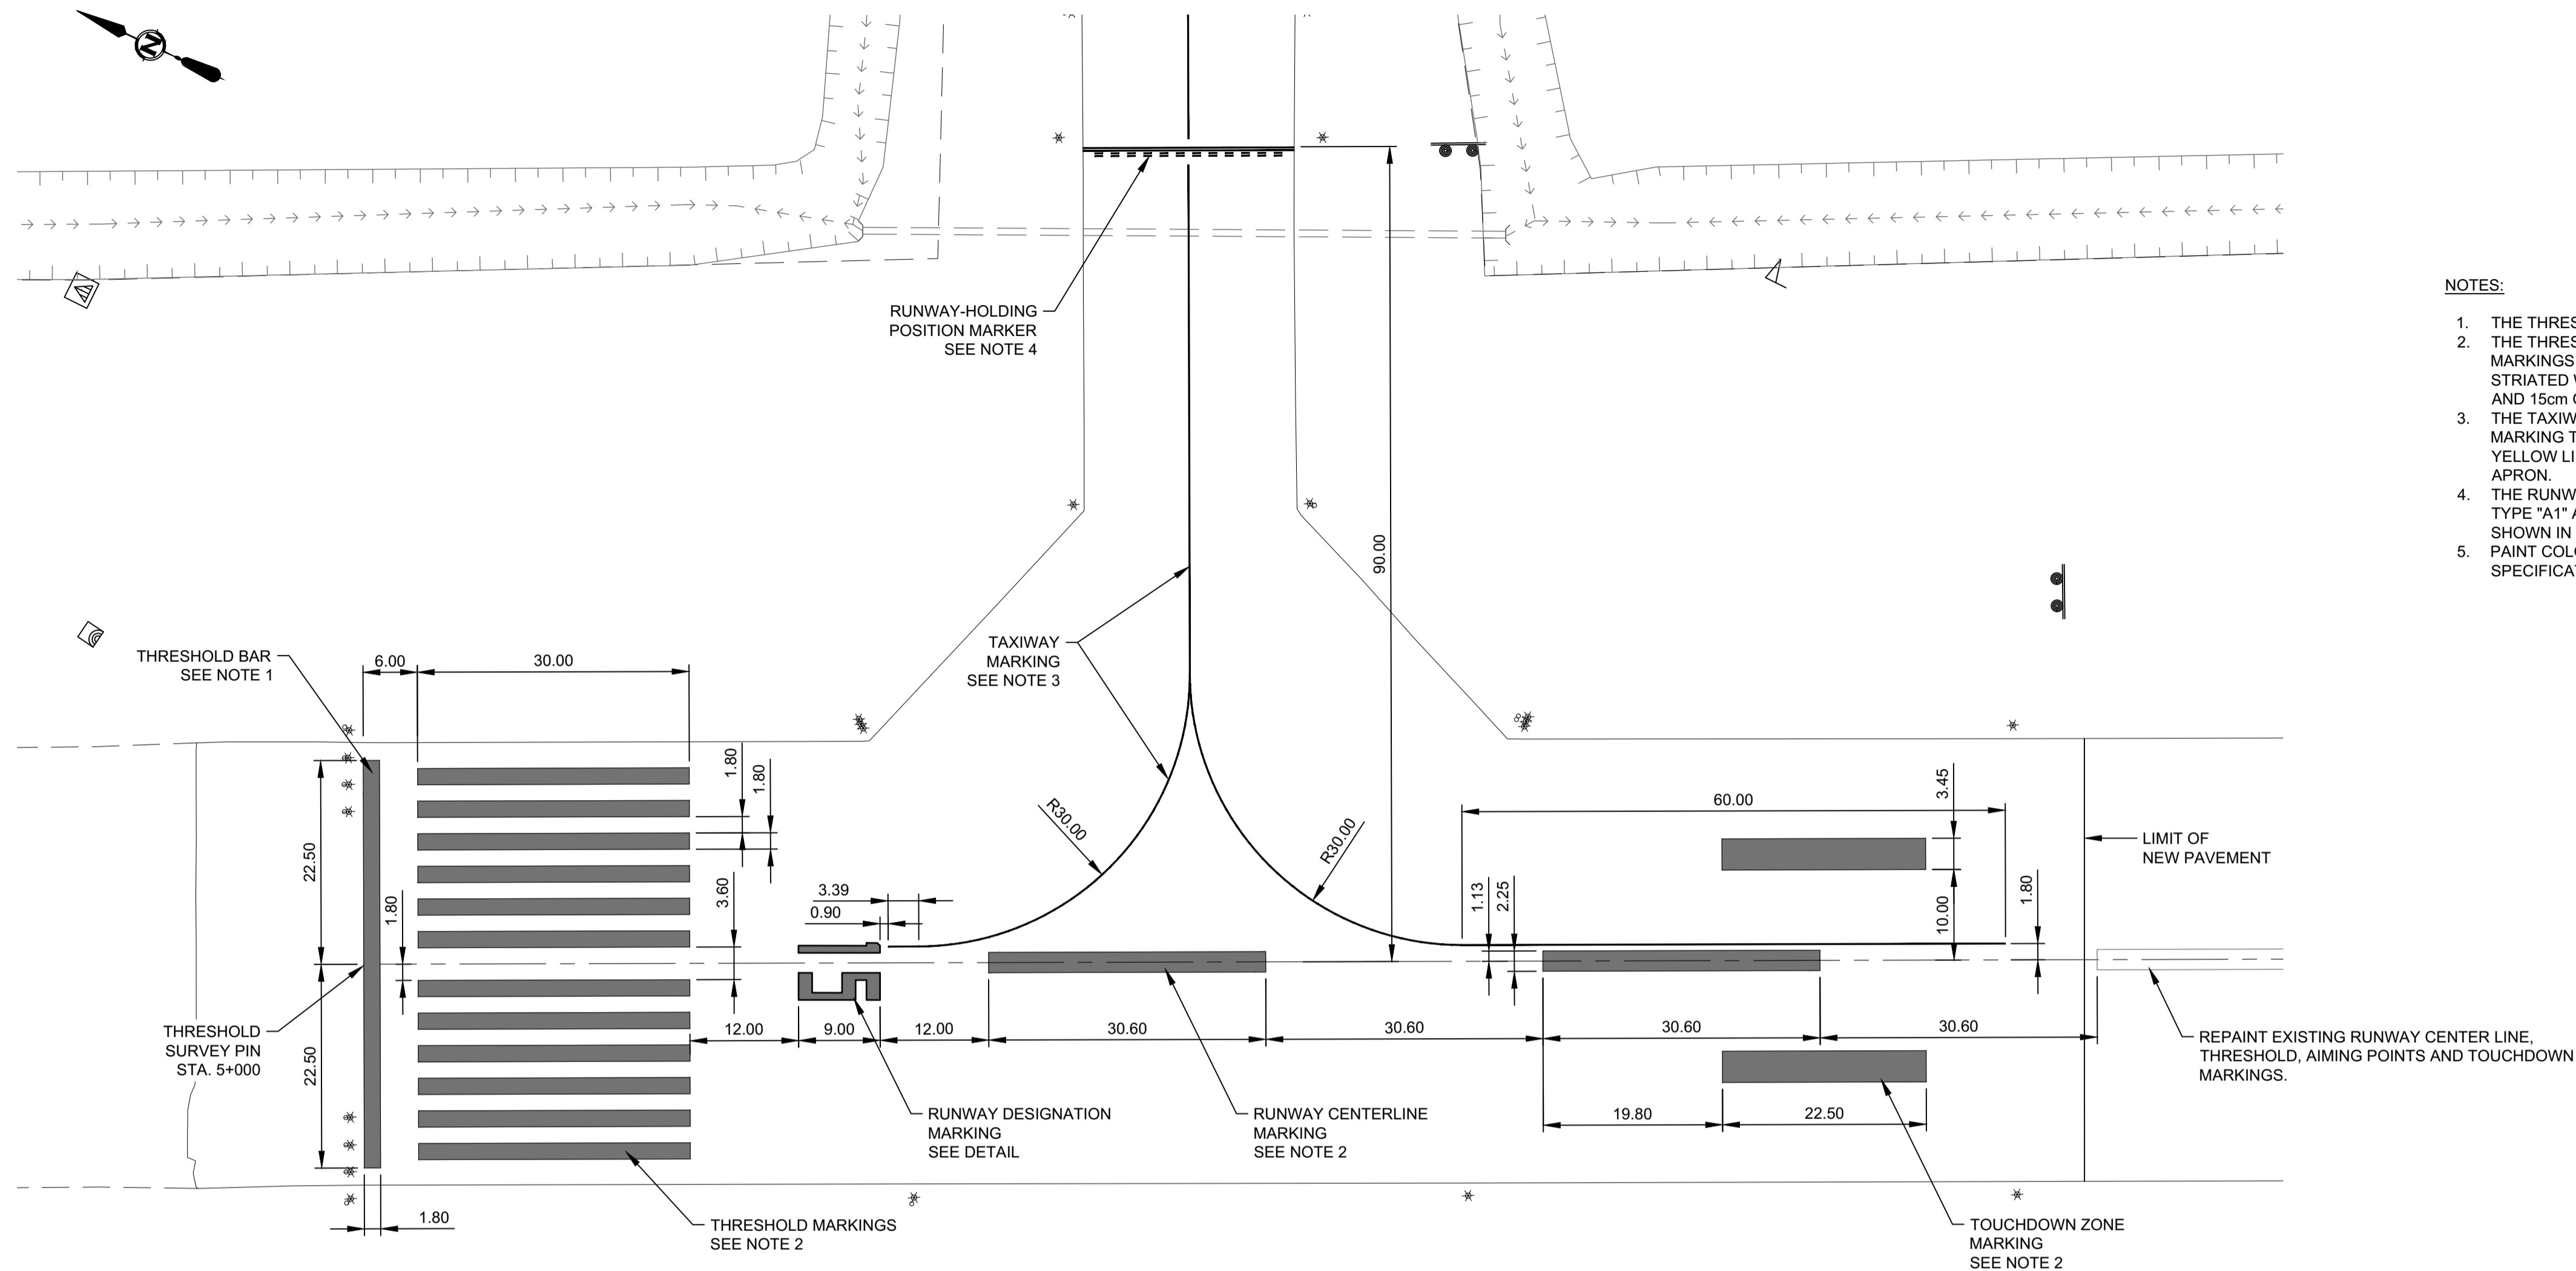

NOTES:

1. THE THRESHOLD BAR IS A SOLID PAINTED WHITE LINE.
2. THE THRESHOLD MARKINGS, RUNWAY CENTER LINE MARKINGS AND THE TOUCHDOWN ZONE MARKINGS ARE STRIATED WITH A SERIES OF 15cm PAINTED WHITE LINES AND 15cm GAPS.
3. THE TAXIWAY CENTERLINE MARKING AND THE TAXIWAY MARKING TURN RADIUS IS A SOLID 15cm PAINTED YELLOW LINE AND CONTINUES TO THE EDGE OF THE APRON.
4. THE RUNWAY-HOLDING POSITION MARKER IS PATTERN TYPE "A1" AND IS A SOLID 15cm PAINTED YELLOW LINE AS SHOWN IN THE DETAIL.
5. PAINT COLOR, ADDITIVES AND APPLICATION AS PER SPECIFICATIONS.



5		
4		
3		
2		
1	Issued for Tender	2019/06/10
0	99% Review	2019/03/29
Revision	Description	Date
Client		client

Project title	Project
CHURCHILL, MANITOBA	
CHURCHILL AIRPORT RUNWAY 15-33 AND TAXIWAY A REPAIR	
Designed by S. CHUNG	Conçu par
Drawn by B. DONALD	Dessiné par
Approved by D. ANDERSON	Approuvé par
PWOSC Project Manager CHRISTINA KOVACS	Administrateur de Projets TPSGC
Drawing title	Titre du dessin
2019 RUNWAY REPAIRS RUNWAY AND TAXIWAY A PAVEMENT MARKINGS	

Project no./No. du projet R.098099.001	Drawing no./No. du dessin C-13 OF 13	Revision no. 1
---	--	-------------------