

1 Demolition Plan - 20th Floor  
09 09 Scale: 1:100

### Demolition Legend:


- Interior u/s of suspended T-bar partition to be removed and discarded.
- Interior u/s of suspended T-bar partition c/w plenum barrier and/or slab to slab partition to be removed and discarded.
- Existing door, door frame, hardware and related components to be removed and discarded.
- Existing door, door frame c/w sidelight(s), hardware and related components to be removed and discarded.
- Existing carpet tile and related components to be removed and discarded throughout project area unless noted otherwise. Symbol not shown at all locations. Contractor to patch, repair and prepare floor to receive new floor finish per Floor Finish Plan on ID24, 25, 26, 27.
- Existing intermediate ceiling and related components to be removed and discarded. Contractor to patch, repair and prepare floor to receive new floor finish per Floor Finish Plan on ID24, 25, 26, 27.

### Demolition Drawing Notes:


- Repair gypsum board at columns where partitions have been removed to Level 4.
- Existing upper and lower millwork cabinets and related components to be removed and discarded. Refer to Mechanical drawings for related plumbing demolition work.
- Existing upper and lower millwork cabinets and related components to be removed and discarded.
- Existing lower millwork cabinets and related components to be removed and discarded.
- Patch and repair to Level 4 all core partitions where demolition has occurred.
- Contractor to remove existing field applied vinyl wall covering, skim coat, and prepare to Level 4 ready to receive new wall finish.
- Existing wire mesh from suspended T-bar ceiling to u/s ceiling slab to be removed and discarded.
- Existing partial height partition, partition cap, and related components to be removed and discarded.
- Soap and paper towel dispenser to be removed and discarded.
- Contractor to remove existing vinyl wall board and demountable trim.
- Curtains and related hardware to be removed and discarded.
- Existing tackboards to be removed and discarded.
- Corner phone shelf to be removed and discarded.
- Contractor to remove existing slab mounted projector mount and related components.
- Existing projector screen and related hardware to be removed and discarded.
- Plastic corner guards to be removed and discarded.
- Contractor to remove existing wall sconce. Supply and install new cover plate.
- Contractor to remove existing roller blind mounted to partition with care. Supply and install new "L" bracket to mount blind to window mullion.
- Contractor to protect existing plastic laminate drinking fountain and fire hose cabinet surround from damage during demolition and construction activities.

### Demolition General Notes:

- It is the Contractor's responsibility to refer to all information in the Specification Document.
- It is the Contractor's responsibility to read this drawing in conjunction with all other drawings in this package. Report any discrepancies between drawings to prior to commencing with Construction.
- Contractor will be held responsible for any damage done to existing partitions, ceiling, finishes and all other components to remain and to adjacent spaces.
- Refer to Mechanical and Electrical drawings for extent of demolition.
- Unless otherwise noted, all existing partitions, door/sidelight assembly, floor finish, etc. to remain.
- Contractor to remove and turn over to Departmental Representative all items not being used for new construction, unless otherwise noted.
- Contractor to remove and discard all floor finishes and baseboards as indicated.
- Contractor to remove all existing carpet tile.
- All existing floor mounted door stops to be removed and discarded.
- Contractor to remove all non-essential data and communication wiring within plenum.
- All existing perimeter convectors to remain. Refer to Mechanical drawings. Refer to Wall Finish Plan on ID28, 29, 30, 31.
- Contractor to remove/clean all glue/2-way tape residue on perimeter window mullion where partition was removed and throughout the space where required.
- All existing perimeter blinds/window treatment to remain. Contractor to bundle and wrap blinds/window shades adequately for dust protection prior to Construction. Contractor to include for the removal and replacement of 50% of the existing roller shades with new. Width from centreline of mullion is 1525mm. Height of glazing 2667. Refer to Specification.

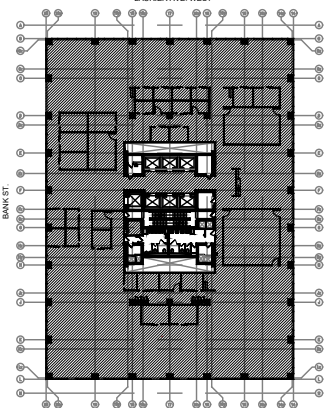

### Key Plan



### Project North



I, the undersigned have reviewed and take responsibility for this design work on behalf of the firm. I am qualified and the firm is registered, in the appropriate design discipline.		
David Gibbons	25000	2019
REGISTRATION INFORMATION As required by the Province of Ontario, Canada		
LWG Architectural Interiors Inc.	42687	2018

Contractor to verify all dimensions & conditions on site and immediately notify the engineer of all discrepancies.


04	Issued for Addendum 01	2019-07-16
03	Issued for Tender	2019-01-15
02	Issued for 99% Client Review	2018-03-09
01	Issued for 66% Client Review	2018-02-16

revisions	description	date
-----------	-------------	------

A	detail no.	A
C	no. of detail	B
	location drawing no.	C
	our design no.	
	drawing no.	
	design no.	

project project

### LEL Generic Swing Space

300 Laurier West, Ottawa, N

drawing dessin

### Demolition Plan 20th Floor

Scale: As Noted

Designed By	RB & MB	Conçu par
Date	2018-01-26	(yyyy/mm/dd)
Drawn By	MB	Dessiné par
Date	2018-03-09	(yyyy/mm/dd)
Reviewed By	BW	Examiné par
Date	2018-03-09	(yyyy/mm/dd)
Approved By	BW	Approuvé par
Date	2018-01-26	(yyyy/mm/dd)
Tender		Soumission
Project Manager	Brent Cheff	Administrateur de projets
Project no.		No. du projet
	R.088901.013 (17096)	
Drawing no.		No. du dessin

ID09