
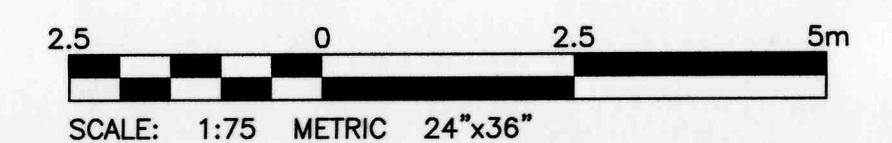
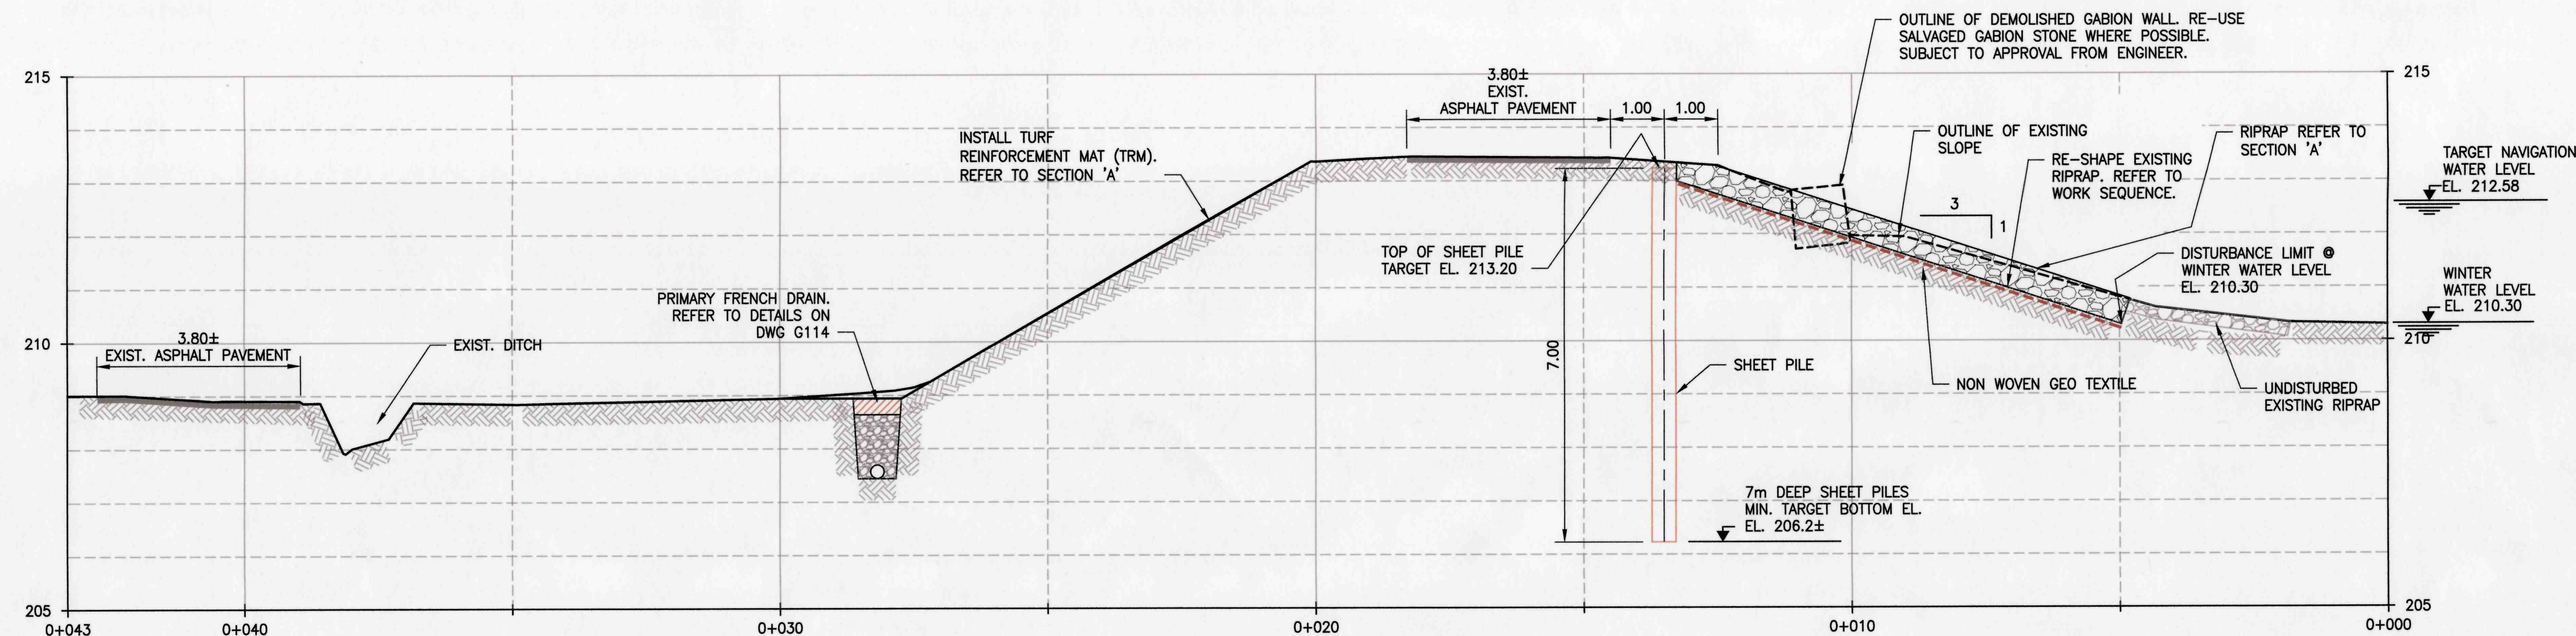


WORK SEQUENCE ON RESHAPING WET SIDE SLOPE

1. DEMOLISH EXISTING GABION BOX RETAINING WALLS. SALVAGE EXISTING GABION ROCK FILL FOR FUTURE USE.
2. REMOVE EXISTING RIP-RAP.
3. RE-SHAPE SLOPE TO 3H:1V.
4. LINE REWORKED SLOPE WITH NON WOVEN GEOTEXTILE.
5. RE-INSTALL RIP-RAP.

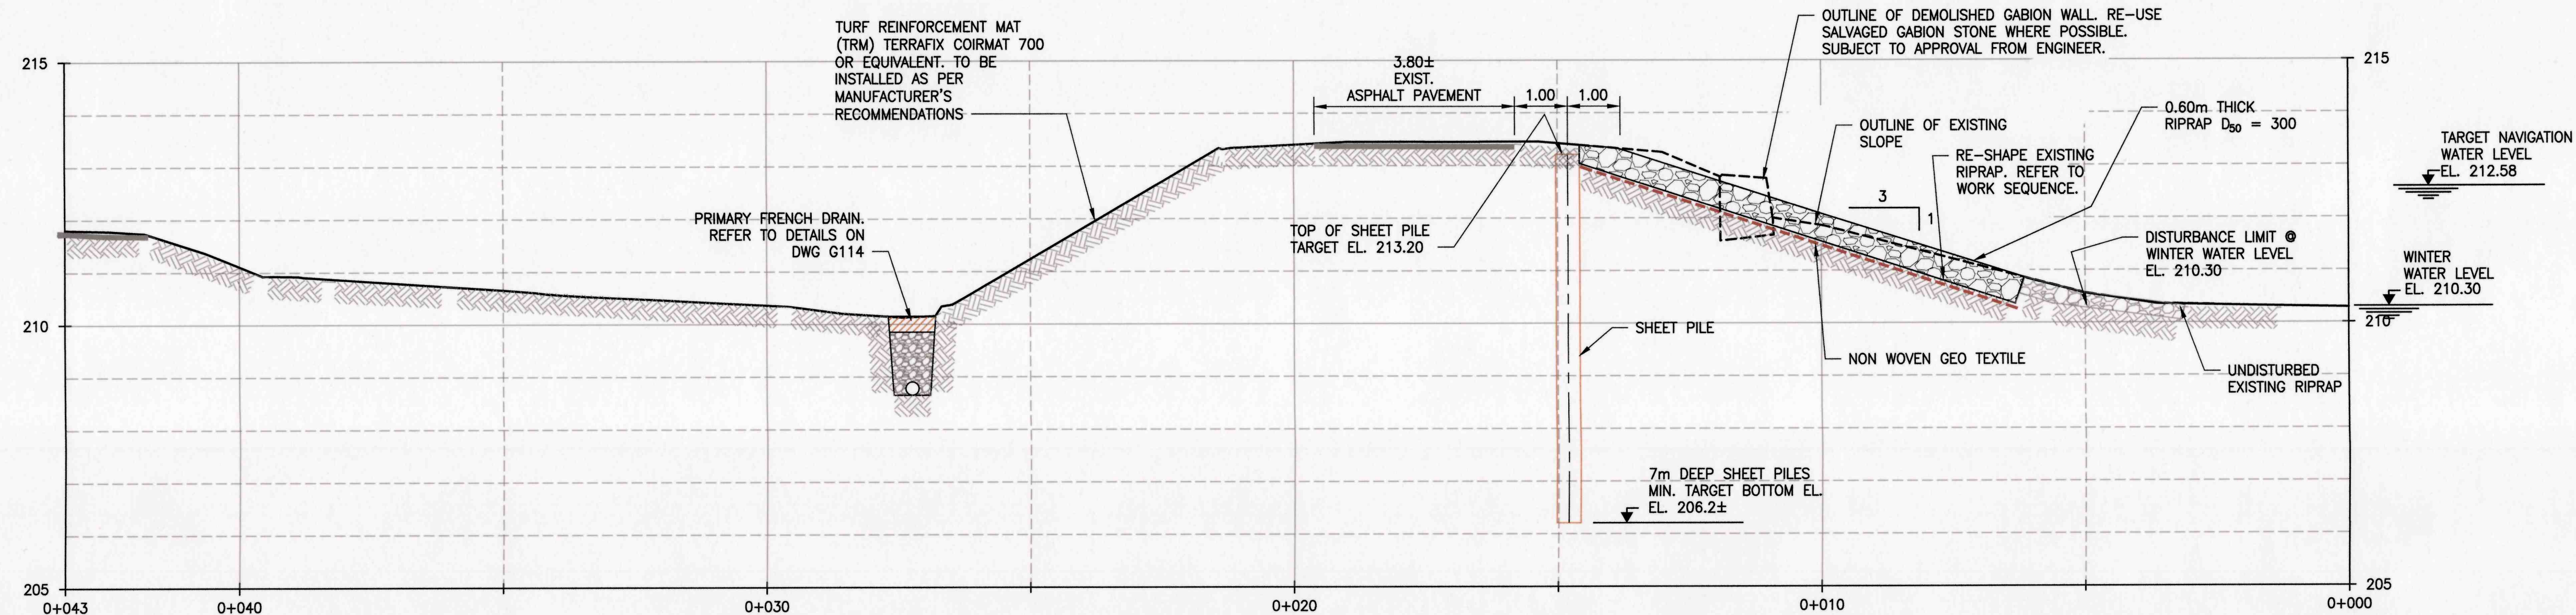

0	19/09/09	ISSUED FOR TENDER	DESIGN BY	DESIGN CHECK
NO.	YY/MM/DD	DESCRIPTION	BY	CHECK
REVISIONS / ISSUE				
CLIENT:				
Parks Canada				
PROJECT:				
UPPER WEST BANK REHABILITATION PETERBOROUGH LIFT LOCK				
DWG. DESCRIPTION:				
REMEDIAL WORK - SECTIONS				
AUTHENTICATION FOR CURRENT REVISION				
DESIGN BY: SG		DATE (YY/MM/DD): 19/08/20		
DESIGN CHECK: S. Gnanasunthar		DATE: 19/09/09		
DRAWN BY: JTC		DATE: 19/08/21		
DWG CHECK: S. Gnanasunthar		DATE: 19/09/09		
DWG. NO. 19-1538-003 G112				REV. 0