



**RETURN BIDS TO:
RETOURNER LES SOUMISSIONS À:**

Bid Receiving - PWGSC / Réception des
soumissions - TPSGC
11 Laurier St. / 11, rue Laurier
Place du Portage, Phase III
Core 0B2 / Noyau 0B2
Gatineau, Québec K1A 0S5
Bid Fax: (819) 997-9776

**REQUEST FOR PROPOSAL
DEMANDE DE PROPOSITION**

**Proposal To: Public Works and Government
Services Canada**

We hereby offer to sell to Her Majesty the Queen in right
of Canada, in accordance with the terms and conditions
set out herein, referred to herein or attached hereto, the
goods, services, and construction listed herein and on any
attached sheets at the price(s) set out therefor.

**Proposition aux: Travaux Publics et Services
Gouvernementaux Canada**

Nous offrons par la présente de vendre à Sa Majesté la
Reine du chef du Canada, aux conditions énoncées ou
incluses par référence dans la présente et aux annexes
ci-jointes, les biens, services et construction énumérés
ici sur toute feuille ci-annexée, au(x) prix indiqué(s).

Comments - Commentaires

Vendor/Firm Name and Address

Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution

Defence Communications Division. (QD)
11 Laurier St./11, rue Laurier
Place du Portage, Phase III, 8C2
Gatineau, Québec K1A 0S5

Title - Sujet Assaulter Hub/Cables Assaulter Hub/Cables	
Solicitation No. - N° de l'invitation W8476-206139/A	Date 2021-04-12
Client Reference No. - N° de référence du client W8476-206139	
GETS Reference No. - N° de référence de SEAG PW-\$\$QD-027-28185	
File No. - N° de dossier 027qd.W8476-206139	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM Eastern Daylight Saving Time EDT on - le 2021-05-13 Heure Avancée de l'Est HAE	
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Westcott, Karen	Buyer Id - Id de l'acheteur 027qd
Telephone No. - N° de téléphone (343) 998-5234 ()	FAX No. - N° de FAX () -
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: Specified Herein Précisé dans les présentes	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée See Herein – Voir ci-inclus	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie) Signature Date	



Destination Code - Code destinataire	Destination Address - Adresse de la destination	Invoice Code - Code bur.-comptable	Invoice Address - Adresse de facturation
D - 1	SEE ITEMS	I - 1	SEE ITEMS



Item Article	Description	Dest. Code Dest.	Inv. Code Fact.	Qty Qté	U. of I. U. de D.	Unit Price/Prix unitaire FOB/FAM		Delivery Req. Livraison Req.	Del. Offered Liv. offerte
						Destination	Plant/Usine		
1	ISSP Assaulter Hub and Cable 2.0	Total		450	Each	\$	\$		
2	ISSP Assaulter Hub and Cable 2.0	Total		1800	Each	\$	\$		
3	ISSP Assaulter Hub and Cable 2.0	Total		450	Each	\$	\$		
4	AWR limit of expenditure	D - 1	I - 1	100000	Each	\$	\$	See Herein – Voir ci-inclus	

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

INTEGRATED SOLDIER SYSTEM

ACQUISITION AND SUPPORT OF ASSAULTER HUB 2.0

TABLE OF CONTENTS

PART 1 - GENERAL INFORMATION	4
1.1 INTRODUCTION.....	4
1.2 SUMMARY	4
1.3 DEBRIEFINGS	4
1.4 PHASED BID COMPLIANCE PROCESS	5
PART 2 - BIDDER INSTRUCTIONS	5
2.1 STANDARD INSTRUCTIONS, CLAUSES AND CONDITIONS.....	5
2.2 SUBMISSION OF BIDS.....	5
2.3 ENQUIRIES - BID SOLICITATION.....	6
2.4 APPLICABLE LAWS.....	7
2.5 IMPROVEMENT OF REQUIREMENT DURING SOLICITATION PERIOD	7
2.6 BID CHALLENGE AND RECOURSE MECHANISMS.....	7
PART 3 - BID PREPARATION INSTRUCTIONS.....	7
3.1 BID PREPARATION INSTRUCTIONS	7
PART 4 - EVALUATION PROCEDURES AND BASIS OF SELECTION	9
4.1 PHASED BID COMPLIANCE PROCESS (PBCP).....	9
4.2 TECHNICAL EVALUATION	12
4.3 FINANCIAL EVALUATION.....	12
4.4 BASIS OF SELECTION.....	12
PART 5 – CERTIFICATIONS AND ADDITIONAL INFORMATION	13
5.1 CERTIFICATIONS REQUIRED WITH THE BID	13
5.2 CERTIFICATIONS PRECEDENT TO CONTRACT AWARD AND ADDITIONAL INFORMATION	13
PART 6 - RESULTING CONTRACT CLAUSES	14
6.1 STATEMENT OF WORK.....	14
6.2 STANDARD CLAUSES AND CONDITIONS.....	15
6.3 SECURITY REQUIREMENTS	15
6.4 TERM OF CONTRACT	15
6.5 AUTHORITIES	16
6.6 PAYMENT	17
6.7 CERTIFICATIONS AND ADDITIONAL INFORMATION.....	18
6.8 APPLICABLE LAWS.....	18
6.9 PRIORITY OF DOCUMENTS	18
6.10 DEFENCE CONTRACT	18
6.11 INSURANCE REQUIREMENTS	19
6.12 SHIPPING INSTRUCTIONS	19
6.13 ADDITIONAL PACKAGE MARKINGS - IDENTICAL	21
6.14 PACKAGING REQUIREMENT USING SPECIFICATION D-LM-008-036/SF-000.....	21
6.15 SACC MANUAL CLAUSES	21
6.16 DISPUTE RESOLUTION.....	22
ANNEX “A” STATEMENT OF WORK.....	23
ANNEX “B”, BASIS OF PAYMENT	24

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

ANNEX “C” TO PART 3 OF THE BID SOLICITATION	25
ELECTRONIC PAYMENT INSTRUMENTS.....	25
ANNEX “D” TO PART 5 OF THE BID SOLICITATION	26
FEDERAL CONTRACTORS PROGRAM FOR EMPLOYMENT EQUITY – CERTIFICATION.....	26
ANNEX “E” DND 626 TASK AUTHORIZATION FORM	27

PART 1 - GENERAL INFORMATION

1.1 Introduction

The bid solicitation is divided into six parts plus attachments and annexes, as follows:

- Part 1 General Information: provides a general description of the requirement;
- Part 2 Bidder Instructions: provides the instructions, clauses and conditions applicable to the bid solicitation;
- Part 3 Bid Preparation Instructions: provides Bidders with instructions on how to prepare their bid;
- Part 4 Evaluation Procedures and Basis of Selection: indicates how the evaluation will be conducted, the evaluation criteria that must be addressed in the bid, and the basis of selection;
- Part 5 Certifications and Additional Information: includes the certifications and additional information to be provided;
- Part 6 Resulting Contract Clauses: includes the clauses and conditions that will apply to any resulting contract.

1.2 Summary

1.2.1 Requirement

The Integrated Soldier System (ISS) is a system in use by the Canadian Armed Forces (CAF) that supports the mission of the dismounted soldier by providing situational awareness and better command execution. The basic configuration of the ISS is composed of a Tactical User Interface (TUI), a radio, a Hub and a battery. The Hub is an important component to the ISS as it provides power and data distribution to other peripherals connected to the system. The CAF is interested in upgrading the existing Hub for soldiers in an Assaulter role in order to benefit from the latest technological advancements available today. The requirement is for the acquisition and support of an Assaulter Hub 2.0 with associated Cables and Accessories. The Assaulter Hub 2.0 is the next generation Hub for soldiers in a Commander type of role. The delivery points will be to Canadian Forces Supply Depot Montreal and Canadian Forces Supply Depot Edmonton.

1.2.2 The Federal Contractors Program (FCP)

The Federal Contractors Program (FCP) for employment equity applies to this procurement; refer to Part 5 – Certifications and Additional Information, Part 7 - Resulting Contract Clauses and the annex titled Federal Contractors Program for Employment Equity - Certification.

1.2.3 Epost Connect

This bid solicitation mandates bidders to use the epost Connect service provided by Canada Post Corporation to transmit their bid electronically. Bidders must refer to Part 2 entitled Bidder Instructions, and Part 3 entitled Bid Preparation Instructions, of the bid solicitation, for further information."

1.3 Debriefings

Bidders may request a debriefing on the results of the bid solicitation process. Bidders should make the request to the Contracting Authority within 15 working days from receipt of the results of the bid solicitation process. The debriefing may be in writing, by telephone or in person.

1.4 Phased Bid Compliance Process

The Phased Bid Compliance Process applies to this requirement.

PART 2 - BIDDER INSTRUCTIONS

2.1 Standard Instructions, Clauses and Conditions

All instructions, clauses and conditions identified in the bid solicitation by number, date and title are set out in the [Standard Acquisition Clauses and Conditions Manual](https://buyandsell.gc.ca/policy-and-guidelines/standard-acquisition-clauses-and-conditions-manual) (<https://buyandsell.gc.ca/policy-and-guidelines/standard-acquisition-clauses-and-conditions-manual>) issued by Public Works and Government Services Canada.

Bidders who submit a bid agree to be bound by the instructions, clauses and conditions of the bid solicitation and accept the clauses and conditions of the resulting contract.

The [2003](#) (2020-05-28) Standard Instructions - Goods or Services - Competitive Requirements, are incorporated by reference into and form part of the bid solicitation.

Subsection 5.4 of [2003](#), Standard Instructions - Goods or Services - Competitive Requirements, is amended as follows:

Delete: 60 days
Insert: 120 days

Modify 2003 Para 08 (2020-05-28) Transmission by facsimile DELETE Para 1

2.2 Submission of Bids

Bids must be submitted only to Public Works and Government Services Canada (PWGSC) Bid Receiving Unit by the date, time and place indicated in the bid solicitation.

Note: bidders must only submit using epost Connect for bids closing at the Bid Receiving Unit in the National Capital Region (NCR) the email address is:

tpsgc.dgareceptiondessoumissions-abbidreceiving.pwgsc@tpsgc-pwgsc.gc.ca

Note: Bids will not be accepted if emailed directly to this email address. This email address is to be used to open an epost Connect conversation, as detailed in Standard Instructions 2003, or to send bids through an epost Connect message if the bidder is using its own licensing agreement for epost Connect.

2.2.1 epost Connect

a. Unless specified otherwise in the bid solicitation, bids **must** be submitted by using the [epost Connect service](#) provided by Canada Post Corporation.

- i. PWGSC, National Capital Region: The only acceptable email address to use with epost Connect for responses to bid solicitations issued by PWGSC headquarters is: tpsgc.dgareceptiondessoumissions-abbidReceiving.pwgsc@tpsgc-pwgsc.gc.ca, or, if applicable, the email address identified in the bid solicitation.
- ii. PWGSC regional offices: The only acceptable email address to use with epost Connect for responses to bid solicitations issued by PWGSC regional offices is identified in the bid solicitation.

-
- b. To submit a bid using epost Connect service, the Bidder must either:
 - i. send directly its bid only to the specified PWGSC Bid Receiving Unit, using its own licensing agreement for epost Connect provided by Canada Post Corporation; or
 - ii. send as early as possible, and in any case, at least six business days prior to the solicitation closing date and time, (in order to ensure a response), an email that includes the bid solicitation number to the specified PWGSC Bid Receiving Unit requesting to open an epost Connect conversation. Requests to open an epost Connect conversation received after that time may not be answered.
 - c. If the Bidder sends an email requesting epost Connect service to the specified Bid Receiving Unit in the bid solicitation, an officer of the Bid Receiving Unit will then initiate an epost Connect conversation. The epost Connect conversation will create an email notification from Canada Post Corporation prompting the Bidder to access and action the message within the conversation. The Bidder will then be able to transmit its bid afterward at any time prior to the solicitation closing date and time.
 - d. If the Bidder is using its own licensing agreement to send its bid, the Bidder must keep the epost Connect conversation open until at least 30 business days after the solicitation closing date and time.
 - e. The bid solicitation number should be identified in the epost Connect message field of all electronic transfers.
 - f. It should be noted that the use of epost Connect service requires a Canadian mailing address. Should a bidder not have a Canadian mailing address, they may use the Bid Receiving Unit address specified in the solicitation in order to register for the epost Connect service.
 - g. For bids transmitted by epost Connect service, Canada will not be responsible for any failure attributable to the transmission or receipt of the bid including, but not limited to, the following:
 - i. receipt of a garbled, corrupted or incomplete bid;
 - ii. availability or condition of the epost Connect service;
 - iii. incompatibility between the sending and receiving equipment;
 - iv. delay in transmission or receipt of the bid;
 - v. failure of the Bidder to properly identify the bid;
 - vi. illegibility of the bid;
 - vii. security of bid data; or,
 - viii. inability to create an electronic conversation through the epost Connect service.
 - h. The Bid Receiving Unit will send an acknowledgement of the receipt of bid document(s) via the epost Connect conversation, regardless of whether the conversation was initiated by the supplier using its own license or the Bid Receiving Unit. This acknowledgement will confirm only the receipt of bid document(s) and will not confirm if the attachments may be opened nor if the content is readable.
 - i. Bidders must ensure that they are using the correct email address for the Bid Receiving Unit when initiating a conversation in epost Connect or communicating with the Bid Receiving Unit and should not rely on the accuracy of copying and pasting the email address into the epost Connect system.
 - j. A bid transmitted by epost Connect service constitutes the formal bid of the Bidder and must be submitted in accordance with section 05.

2.3 Enquiries - Bid Solicitation

All enquiries must be submitted in writing to the Contracting Authority no later than **5** calendar days before the bid closing date. Enquiries received after that time may not be answered.

Bidders should reference as accurately as possible the numbered item of the bid solicitation to which the enquiry relates. Care should be taken by Bidders to explain each question in sufficient detail in order to enable Canada to provide an accurate answer. Technical enquiries that are of a proprietary nature must be clearly marked "proprietary" at each relevant item. Items identified as "proprietary" will be treated as such except where Canada determines that the enquiry is not of a proprietary nature. Canada may edit the question(s) or may request that the Bidder do so, so that the proprietary nature of the question(s) is eliminated and the enquiry can be answered to all Bidders. Enquiries not submitted in a form that can be distributed to all Bidders may not be answered by Canada.

2.4 Applicable Laws

Any resulting contract must be interpreted and governed, and the relations between the parties determined, by the laws in force in Ontario.

Bidders may, at their discretion, substitute the applicable laws of a Canadian province or territory of their choice without affecting the validity of their bid, by deleting the name of the Canadian province or territory specified and inserting the name of the Canadian province or territory of their choice. If no change is made, it acknowledges that the applicable laws specified are acceptable to the Bidders.

2.5 Improvement of Requirement During Solicitation Period

Should bidders consider that the specifications or Statement of Work contained in the bid solicitation could be improved technically or technologically, bidders are invited to make suggestions, in writing, to the Contracting Authority named in the bid solicitation. Bidders must clearly outline the suggested improvement as well as the reason for the suggestion. Suggestions that do not restrict the level of competition nor favour a particular bidder will be given consideration provided they are submitted to the Contracting Authority at least 10 days before the bid closing date. Canada will have the right to accept or reject any or all suggestions.

2.6 Bid Challenge and Recourse Mechanisms

- (a) Several mechanisms are available to potential suppliers to challenge aspects of the procurement process up to and including contract award.
- (b) Canada encourages suppliers to first bring their concerns to the attention of the Contracting Authority. Canada's [Buy and Sell](#) website, under the heading "[Bid Challenge and Recourse Mechanisms](#)" contains information on potential complaint bodies such as:
 - Office of the Procurement Ombudsman (OPO)
 - Canadian International Trade Tribunal (CITT)
- (c) Suppliers should note that there are **strict deadlines** for filing complaints, and the time periods vary depending on the complaint body in question. Suppliers should therefore act quickly when they want to challenge any aspect of the procurement process.

PART 3 - BID PREPARATION INSTRUCTIONS

3.1 Bid Preparation Instructions

The Bidder **must** submit its bid electronically, Canada requests that the Bidder submits its bid in accordance with section 08 of the 2003 standard instructions. The epost Connect system has a limit of 1GB per single message posted and a limit of 20GB per conversation.

The bid must be gathered per section and separated as follows:

Section I: Technical Bid
Section II: Financial Bid
Section III: Certifications

If the Bidder provided through epost Connect service, the wording of the electronic copy provided through epost Connect service will have priority over the wording of the other copies.

Section I: Technical Bid

In their technical bid, Bidders should demonstrate their understanding of the requirements contained in the bid solicitation and explain how they will meet these requirements. Bidders should demonstrate their capability in a thorough, concise and clear manner for carrying out the work.

The technical bid should address clearly and in sufficient depth the points that are subject to the evaluation criteria against which the bid will be evaluated. Simply repeating the statement contained in the bid solicitation is not sufficient. In order to facilitate the evaluation of the bid, Canada requests that Bidders address and present topics in the order of the evaluation criteria under the same headings. To avoid duplication, Bidders may refer to different sections of their bids by identifying the specific paragraph and page number where the subject topic has already been addressed.

Section II: Financial Bid

Bidders must submit their financial bid in accordance with the Basis of Payment in Annex "B.

3.1.1 Electronic Payment of Invoices – Bid

Electronic Payment Instruments, complete Annex "C" Electronic Payment Instruments, to identify which ones are accepted.

Acceptance of Electronic Payment Instruments will not be considered as an evaluation criterion.

3.1.2 Exchange Rate Fluctuation

C3010T (2014-11-27), Exchange Rate Fluctuation Risk Mitigation,
C3011T (2017-08-17), Exchange Rate Fluctuation

3.1.3 SACC *Manual* Clauses

Section III: Certifications

Bidders must submit the certifications and additional information required under Part 5.

PART 4 - EVALUATION PROCEDURES AND BASIS OF SELECTION

4.1 Phased Bid Compliance Process (PBCP)

4.1.1 General

a) Canada is conducting the Phased Bid Compliance Process described below for this requirement.

b) Notwithstanding any review by Canada at Phase I or II of the Phased Bid Compliance Process, Bidders are and will remain solely responsible for the accuracy, consistency and completeness of their Bids and Canada does not undertake, by reason of this review, any obligations or responsibility for identifying any or all errors or omissions in Bids or in responses by a Bidder to any communication from Canada.

THE BIDDER ACKNOWLEDGES THAT THE REVIEWS IN PHASE I AND II OF THIS PHASED BID COMPLIANCE PROCESS ARE PRELIMINARY AND DO NOT PRECLUDE A FINDING IN PHASE III THAT THE BID IS NON-RESPONSIVE, EVEN FOR MANDATORY REQUIREMENTS WHICH WERE SUBJECT TO REVIEW IN PHASE I OR II AND NOTWITHSTANDING THAT THE BID HAD BEEN FOUND RESPONSIVE IN SUCH EARLIER PHASE. CANADA MAY DEEM A BID TO BE NON-RESPONSIVE TO A MANDATORY REQUIREMENT AT ANY PHASE. THE BIDDER ALSO ACKNOWLEDGES THAT ITS RESPONSE TO A NOTICE OR A COMPLIANCE ASSESSMENT REPORT (CAR) (EACH DEFINED BELOW) IN PHASE I OR II MAY NOT BE SUCCESSFUL IN RENDERING ITS BID RESPONSIVE TO THE MANDATORY REQUIREMENTS THAT ARE THE SUBJECT OF THE NOTICE OR CAR, AND MAY RENDER ITS BID NON-RESPONSIVE TO OTHER MANDATORY REQUIREMENTS.

c) Canada may, in its discretion, request and accept at any time from a Bidder and consider as part of the Bid, any information to correct errors or deficiencies in the Bid that are clerical or administrative, such as, without limitation, failure to sign the Bid or any part or to checkmark a box in a form, or other failure of format or form or failure to acknowledge; failure to provide a procurement business number or contact information such as names, addresses and telephone numbers; inadvertent errors in numbers or calculations that do not change the amount the Bidder has specified as the price or of any component thereof that is subject to evaluation. This shall not limit Canada's right to request or accept any information after the bid solicitation closing in circumstances where the bid solicitation expressly provides for this right. The Bidder will have the time period specified in writing by Canada to provide the necessary documentation. Failure to meet this deadline will result in the Bid being declared non-responsive.

d) The PBCP does not limit Canada's rights under Standard Acquisition Clauses and Conditions (SACC) 2003 (2018-05-22) Standard Instructions – Goods or Services – Competitive Requirements nor Canada's right to request or accept any information during the solicitation period or after bid solicitation closing in circumstances where the bid solicitation expressly provides for this right, or in the circumstances described in subsection (c).

e) Canada will send any Notice or CAR by any method Canada chooses, in its absolute discretion. The Bidder must submit its response by the method stipulated in the Notice or CAR. Responses are deemed to be received by Canada at the date and time they are delivered to Canada by the method and at the address specified in the Notice or CAR. An email response permitted by the Notice or CAR is deemed received by Canada on the date and time it is received in Canada's email inbox at Canada's email address specified in the Notice or CAR. A Notice or CAR sent by Canada to the Bidder at any address provided by the Bidder in or pursuant to the Bid is deemed received by the Bidder on the date it is sent by Canada. Canada is not responsible for late receipt by Canada of a response, however caused.

4.1.1.2 Phase I: Financial Bid

- a) After the closing date and time of this bid solicitation, Canada will examine the Bid to determine whether it includes a Financial Bid and whether any Financial Bid includes all information required by the solicitation. Canada's review in Phase I will be limited to identifying whether any information that is required under the bid solicitation to be included in the Financial Bid is missing from the Financial Bid. This review will not assess whether the Financial Bid meets any standard or is responsive to all solicitation requirements.
- b) Canada's review in Phase I will be performed by officials of the Department of Public Works and Government Services.
- c) If Canada determines, in its absolute discretion that there is no Financial Bid or that the Financial Bid is missing all of the information required by the bid solicitation to be included in the Financial Bid, then the Bid will be considered non-responsive and will be given no further consideration.
- d) For Bids other than those described in c), Canada will send a written notice to the Bidder ("Notice") identifying where the Financial Bid is missing information. A Bidder whose Financial Bid has been found responsive to the requirements that are reviewed at Phase I, will not receive a Notice. Such Bidders shall not be entitled to submit any additional information in respect of their Financial Bid.
- e) The Bidders who have been sent a Notice shall have the time period specified in the Notice (the "Remedy Period") to remedy the matters identified in the Notice by providing to Canada, in writing, additional information or clarification in response to the Notice. Responses received after the end of the Remedy Period will not be considered by Canada, except in circumstances and on terms expressly provided for in the Notice.
- f) In its response to the Notice the Bidder will be entitled to remedy only that part of its Financial Bid which is identified in the Notice. For instance, where the Notice states that a required line item has been left blank, only the missing information may be added to the Financial Bid, except that, in those instances where the addition of such information will necessarily result in a change to other calculations previously submitted in its Financial Bid, (for example, the calculation to determine a total price), such necessary adjustments shall be identified by the Bidder and only these adjustments shall be made. All submitted information must comply with the requirements of this solicitation.
- g) Any other changes to the Financial Bid submitted by the Bidder will be considered to be new information and will be disregarded. There will be no change permitted to any other Section of the Bidder's Bid. Information submitted in accordance with the requirements of this solicitation in response to the Notice will replace, in full, **only** that part of the original Financial Bid as is permitted above, and will be used for the remainder of the bid evaluation process.
- h) Canada will determine whether the Financial Bid is responsive to the requirements reviewed at Phase I, considering such additional information or clarification as may have been provided by the Bidder in accordance with this Section. If the Financial Bid is not found responsive for the requirements reviewed at Phase I to the satisfaction of Canada, then the Bid shall be considered non-responsive and will receive no further consideration.
- i) Only Bids found responsive to the requirements reviewed in Phase I to the satisfaction of Canada, will receive a Phase II review.

4.1.1.3 Phase II: Technical Bid

- a) Canada's review at Phase II will be limited to a review of the Technical Bid to identify any instances where the Bidder has failed to meet any Eligible Mandatory Criterion. This review will not assess whether the Technical Bid meets any standard or is responsive to all solicitation requirements. Eligible

Mandatory Criteria are all mandatory technical criteria that are identified in this solicitation as being subject to the Phased Bid Compliance Process. Mandatory technical criteria that are not identified in the solicitation as being subject to the Phased Bid Compliance Process, will not be evaluated until Phase III.

- b) Canada will send a written notice to the Bidder (Compliance Assessment Report or "CAR") identifying any Eligible Mandatory Criteria that the Bid has failed to meet. A Bidder whose Bid has been found responsive to the requirements that are reviewed at Phase II will receive a CAR that states that its Bid has been found responsive to the requirements reviewed at Phase II. Such Bidder shall not be entitled to submit any response to the CAR.
- c) A Bidder shall have the period specified in the CAR (the "Remedy Period") to remedy the failure to meet any Eligible Mandatory Criterion identified in the CAR by providing to Canada in writing additional or different information or clarification in response to the CAR. Responses received after the end of the Remedy Period will not be considered by Canada, except in circumstances and on terms expressly provided for in the CAR.
- d) The Bidder's response must address only the Eligible Mandatory Criteria listed in the CAR as not having been achieved, and must include only such information as is necessary to achieve such compliance. Any additional information provided by the Bidder which is not necessary to achieve such compliance will not be considered by Canada, except that, in those instances where such a response to the Eligible Mandatory Criteria specified in the CAR will necessarily result in a consequential change to other parts of the Bid, the Bidder shall identify such additional changes, provided that its response must not include any change to the Financial Bid.
- e) The Bidder's response to the CAR should identify in each case the Eligible Mandatory Criterion in the CAR to which it is responding, including identifying in the corresponding section of the original Bid, the wording of the proposed change to that section, and the wording and location in the Bid of any other consequential changes that necessarily result from such change. In respect of any such consequential change, the Bidder must include a rationale explaining why such consequential change is a necessary result of the change proposed to meet the Eligible Mandatory Criterion. It is not up to Canada to revise the Bidder's Bid, and failure of the Bidder to do so in accordance with this subparagraph is at the Bidder's own risk. All submitted information must comply with the requirements of this solicitation.
- f) Any changes to the Bid submitted by the Bidder other than as permitted in this solicitation, will be considered to be new information and will be disregarded. Information submitted in accordance with the requirements of this solicitation in response to the CAR will replace, in full, **only** that part of the original Bid as is permitted in this Section.
- g) Additional or different information submitted during Phase II permitted by this section will be considered as included in the Bid, but will be considered by Canada in the evaluation of the Bid at Phase II only for the purpose of determining whether the Bid meets the Eligible Mandatory Criteria. It will not be used at any Phase of the evaluation to increase or decrease any score that the original Bid would achieve without the benefit of such additional or different information. For instance, an Eligible Mandatory Criterion that requires a mandatory minimum number of points to achieve compliance will be assessed at Phase II to determine whether such mandatory minimum score would be achieved with such additional or different information submitted by the Bidder in response to the CAR. If so, the Bid will be considered responsive in respect of such Eligible Mandatory Criterion, and the additional or different information submitted by the Bidder shall bind the Bidder as part of its Bid, but the Bidder's original score, which was less than the mandatory minimum for such Eligible Mandatory Criterion, will not change, and it will be that original score that is used to calculate any score for the Bid.
- h) Canada will determine whether the Bid is responsive for the requirements reviewed at Phase II,

considering such additional or different information or clarification as may have been provided by the Bidder in accordance with this Section. If the Bid is not found responsive for the requirements reviewed at Phase II to the satisfaction of Canada, then the Bid shall be considered non-responsive and will receive no further consideration.

- i) Only Bids found responsive to the requirements reviewed in Phase II to the satisfaction of Canada, will receive a Phase III evaluation.

4.1.1.4 Phase III: Final Evaluation of the Bid

- a) In Phase III, Canada will complete the evaluation of all Bids found responsive to the requirements reviewed at Phase II. Bids will be assessed in accordance with the entire requirement of the bid solicitation including the technical and financial evaluation criteria.
- b) A Bid is non-responsive and will receive no further consideration if it does not meet all mandatory evaluation criteria of the solicitation.

4.2 Technical Evaluation

4.2.1 Mandatory Technical Criteria

Mandatory technical evaluation criteria are included in Annex A, Appendix 4.

The Phased Bid Compliance Process will apply to all mandatory technical criteria.

4.3 Financial Evaluation

4.3.1. Financial Bids will be evaluated in Canadian currency. Prices submitted in foreign currency will be converted to Canadian dollars based on the exchange rate provided by the Bank of Canada at 16:30 Eastern Time (ET) on the date of the RFP closing date and the resulting conversion values will be used for the evaluation.

4.3.2. Financial bids will be evaluated based on prices received from Bidders set out in Annex C. The evaluated price will be the sum of the totals of Table 1, Table 2, Table 4, Table 5 and Table 6. No other pricing or financial information, if provided, will be evaluated.

4.4 Basis of Selection

A bid must comply with the requirements of the bid solicitation and meet all mandatory technical evaluation criteria to be declared responsive. The responsive bid with the lowest evaluated price will be recommended for award of a contract.

PART 5 – CERTIFICATIONS AND ADDITIONAL INFORMATION

Bidders must provide the required certifications and additional information to be awarded a contract.

The certifications provided by Bidders to Canada are subject to verification by Canada at all times. Unless specified otherwise, Canada will declare a bid non-responsive, or will declare a contractor in default if any certification made by the Bidder is found to be untrue, whether made knowingly or unknowingly, during the bid evaluation period or during the contract period.

The Contracting Authority will have the right to ask for additional information to verify the Bidder's certifications. Failure to comply and to cooperate with any request or requirement imposed by the Contracting Authority will render the bid non-responsive or constitute a default under the Contract.

5.1 Certifications Required with the Bid

Bidders must submit the following duly completed certifications as part of their bid.

5.1.1 Integrity Provisions - Declaration of Convicted Offences

In accordance with the Integrity Provisions of the Standard Instructions, all bidders must provide with their bid, **if applicable**, the Integrity declaration form available on the [Forms for the Integrity Regime](http://www.tpsgc-pwgsc.gc.ca/ci-if/declaration-eng.html) website (<http://www.tpsgc-pwgsc.gc.ca/ci-if/declaration-eng.html>), to be given further consideration in the procurement process.

5.2 Certifications Precedent to Contract Award and Additional Information

The certifications and additional information listed below should be submitted with the bid but may be submitted afterwards. If any of these required certifications or additional information is not completed and submitted as requested, the Contracting Authority will inform the Bidder of a time frame within which to provide the information. Failure to provide the certifications or the additional information listed below within the time frame specified will render the bid non-responsive.

5.2.1 Integrity Provisions – Required Documentation

In accordance with the section titled Information to be provided when bidding, contracting or entering into a real property agreement of the [Ineligibility and Suspension Policy](http://www.tpsgc-pwgsc.gc.ca/ci-if/politique-policy-eng.html) (<http://www.tpsgc-pwgsc.gc.ca/ci-if/politique-policy-eng.html>), the Bidder must provide the required documentation, as applicable, to be given further consideration in the procurement process.

5.2.2 Federal Contractors Program for Employment Equity - Bid Certification

By submitting a bid, the Bidder certifies that the Bidder, and any of the Bidder's members if the Bidder is a Joint Venture, is not named on the Federal Contractors Program (FCP) for employment equity "FCP Limited Eligibility to Bid" list available at the bottom of the page of the [Employment and Social Development Canada \(ESDC\) - Labour's](https://www.canada.ca/en/employment-social-development/programs/employment-equity/federal-contractor-program.html#) website (<https://www.canada.ca/en/employment-social-development/programs/employment-equity/federal-contractor-program.html#>).

Canada will have the right to declare a bid non-responsive if the Bidder, or any member of the Bidder if the Bidder is a Joint Venture, appears on the "FCP Limited Eligibility to Bid list at the time of contract award.

PART 6 - RESULTING CONTRACT CLAUSES

The following clauses and conditions apply to and form part of any contract resulting from the bid solicitation.

6.1 Statement of Work

The Contractor must perform the Work in accordance with the Statement of Work at Annex "A."

6.1.1 Option to Purchase

The Contractor grants to Canada the irrevocable option to acquire the goods, services or both described at Annex A of the Contract under the same conditions and at the prices and/or rates stated in the Contract. The option may only be exercised by the Contracting Authority and will be evidenced, for administrative purposes only, through a contract amendment.

The Contracting Authority may exercise the option at any time before the expiry of the Contract by sending a written notice to the Contractor.

6.1.2 Task Authorization

The Work or a portion of the Work to be performed under the Contract will be on an "as and when requested basis" using a Task Authorization (TA). The Work described in the TA must be in accordance with the scope of the Contract.

6.1.2.1 Task Authorization Process

The Work or a portion of the Work to be performed under the Contract will be on an "as and when requested basis" using a Task Authorization (TA). The Work described in the TA must be in accordance with the scope of the Contract.

1. The Technical Authority will provide the Contractor with a description of the task using the "Task Authorization Form "DND 626, Task Authorization Form" or "Task Authorization" form specified in Annex E.
2. The Task Authorization (TA) will contain the details of the activities to be performed, a description of the deliverables, and a schedule indicating completion dates for the major activities or submission dates for the deliverables. The TA will also include the applicable basis (bases) and methods of payment as specified in the Contract.
3. The Contractor must provide the Technical Authority, within 15 calendar days of its receipt, the proposed total estimated cost for performing the task and a breakdown of that cost, established in accordance with the Basis of Payment Annex B specified in the Contract.
4. The Contractor must not commence work until a TA authorized by the Contracting Authority has been received by the Contractor. The Contractor acknowledges that any work performed before a TA has been received will be done at the Contractor's own risk.

6.1.2.2 Canada's Obligation - Portion of the Work - Task Authorizations

Canada's obligation with respect to the portion of the Work under the Contract that is performed through task authorizations is limited to the total amount of the actual tasks performed by the Contractor.

6.1.2.3 Periodic Usage Reports - Contracts with Task Authorizations

The Contractor must compile and maintain records on its provision of services to the federal government under authorized Task Authorizations issued under the Contract.

The Contractor must provide this data in accordance with the reporting requirements detailed below. If some data is not available, the reason must be indicated. If services are not provided during a given period, the Contractor must still provide a "nil" report.

The data must be submitted on a quarterly basis to the Contracting Authority.

The quarterly periods are defined as follows:

1st quarter: April 1 to June 30;

2nd quarter: July 1 to September 30;

3rd quarter: October 1 to December 31; and

4th quarter: January 1 to March 31.

The data must be submitted to the Contracting Authority no later than 10 calendar days after the end of the reporting period.

6.2 Standard Clauses and Conditions

All clauses and conditions identified in the Contract by number, date and title are set out in the [Standard Acquisition Clauses and Conditions Manual](https://buyandsell.gc.ca/policy-and-guidelines/standard-acquisition-clauses-and-conditions-manual) (<https://buyandsell.gc.ca/policy-and-guidelines/standard-acquisition-clauses-and-conditions-manual>) issued by Public Works and Government Services Canada.

6.2.1 General Conditions

[2030](#) (2020-05-28), General Conditions - Higher Complexity - Goods, apply to and form part of the Contract.

6.2.2 Supplemental General Conditions

4001 (2015-04-01), Hardware Purchase,

4006 (2010-08-16), Contractor to Own Intellectual Property Rights in Foreground Information

6.3 Security Requirements

There is no security requirement applicable to the Contract.

6.4 Term of Contract

The Contractor grants to Canada the irrevocable option to extend the term of the Contract by up to two additional one year period(s) under the same conditions. The Contractor agrees that, during the extended period of the Contract, it will be paid in accordance with the applicable provisions as set out in the Basis of Payment.

Canada may exercise this option at any time by sending a written notice to the Contractor at least 30 calendar days before the expiry date of the Contract. The option may only be exercised by the Contracting Authority, and will be evidenced for administrative purposes only, through a contract amendment.

6.4.1 Period of the Contract

The period of the contract is defined as being from the date of contract award until all services and deliverables have been delivered and accepted, all warranties have expired, and no outstanding warranty issues exist.

6.4.2 Delivery Date

All of the firm deliverables must be received on or before 22 weeks after contract award.

6.5 Authorities

6.5.1 Contracting Authority

The Contracting Authority for the Contract is:

Ms. Karen Westcott
Supply Team Leader
Public Services and Procurement Canada
Acquisitions Branch (LAEPSS)
Place du Portage, Phase III, 11 Laurier Street, Gatineau, QC K1A 0S5
Government of Canada
Telephone: (343) 998-5234
E-mail: karen.westcott@tpsgc-pwgsc.gc.ca

The Contracting Authority is responsible for the management of the Contract and any changes to the Contract must be authorized in writing by the Contracting Authority. The Contractor must not perform work in excess of or outside the scope of the Contract based on verbal or written requests or instructions from anybody other than the Contracting Authority.

6.5.2 Technical Authority

The Technical Authority for the Contract is:

To be inserted at Contract award.

The Technical Authority is the representative of the department or agency for whom the Work is being carried out under the Contract and is responsible for all matters concerning the technical content of the Work under the Contract. Technical matters may be discussed with the Technical Authority; however the Technical Authority has no authority to authorize changes to the scope of the Work. Changes to the scope of the Work can only be made through a contract amendment issued by the Contracting Authority.

6.5.3 Procurement Authority

The Procurement Authority for the Contract is:

To be inserted at Contract award.

The Procurement Authority is the representative of the department or agency for whom the Work is being carried out under the Contract and is responsible for all matters concerning the financial and technical content of the Work under the Contract. Technical matters may be discussed with the Procurement Authority; however the Procurement Authority has no authority to authorize changes to the scope of the Work or the pricing in the Basis of Payment (Annex C). Changes to the scope of the Work or the Basis of Payment can only be made through a contract amendment issued by the Contracting Authority.

6.5.4 Contractor's Representative

Bidders to provide name, title, telephone number and email address.

6.6 Payment

6.6.1 Basis of Payment

In consideration of the Contractor satisfactorily completing all of its obligations under the Contract, the Contractor will be paid firm unit prices as specified in Annex B – Basis of Payment, for a cost of \$ _____. Customs duties are excluded and Applicable Taxes are extra, if applicable.

Canada will not pay the Contractor for any design changes, modifications or interpretations of the Work unless they have been approved, in writing, by the Contracting Authority before their incorporation into the Work.

6.6.2 Limitation of Expenditure - Cumulative Total of all Task Authorizations

1. Canada's total liability to the Contractor under the Contract for all authorized Task Authorizations (TAs), inclusive of any revisions, must not exceed the sum of \$ _____. Customs duties are included and Applicable Taxes are extra.
2. No increase in the total liability of Canada will be authorized or paid to the Contractor unless an increase has been approved, in writing, by the Contracting Authority.
3. The Contractor must notify the Contracting Authority in writing as to the adequacy of this sum:
 - a. when it is 75 percent committed, or
 - b. four (4) months before the contract expiry date, or
 - c. as soon as the Contractor considers that the sum is inadequate for the completion of the Work required in all authorized TAs, inclusive of any revisions, whichever comes first.
4. If the notification is for inadequate contract funds, the Contractor must provide to the Contracting Authority, a written estimate for the additional funds required. Provision of such information by the contractor does not increase Canada's liability.

6.6.4 Method of Payment (Multiple Payments)

Canada will pay the Contractor upon completion and delivery of units in accordance with the payment provisions of the Contract if:

- a. an accurate and complete invoice and any other documents required by the Contract have been submitted in accordance with the invoicing instructions provided in the Contract;
- b. all such documents have been verified by Canada;
- c. the Work delivered has been accepted by Canada.

6.6.5 Electronic Payment of Invoices – Contract

The Contractor accepts to be paid using any of the following Electronic Payment Instrument(s):

- a. Visa Acquisition Card;
- b. MasterCard Acquisition Card;
- c. Direct Deposit (Domestic and International);
- d. Electronic Data Interchange (EDI);
- e. Wire Transfer (International Only);
- f. Large Value Transfer System (LVTS) (Over \$25M)

6.6.6 Time Verification

Time charged and the accuracy of the Contractor's time recording system are subject to verification by Canada, before or after payment is made to the Contractor. If verification is done after payment, the Contractor must repay any overpayment, at Canada's request.

6.7 Certifications and Additional Information

6.7.1 Compliance

Unless specified otherwise, the continuous compliance with the certifications provided by the Contractor in its bid or precedent to contract award, and the ongoing cooperation in providing additional information are conditions of the Contract and failure to comply will constitute the Contractor in default. Certifications are subject to verification by Canada during the entire period of the Contract.

6.7.2 Federal Contractors Program for Employment Equity - Default by the Contractor

The Contractor understands and agrees that, when an Agreement to Implement Employment Equity (AIEE) exists between the Contractor and Employment and Social Development Canada (ESDC)-Labour, the AIEE must remain valid during the entire period of the Contract. If the AIEE becomes invalid, the name of the Contractor will be added to the "[FCP Limited Eligibility to Bid](#)" list. The imposition of such a sanction by ESDC will constitute the Contractor in default as per the terms of the Contract.

6.8 Applicable Laws

The Contract must be interpreted and governed, and the relations between the parties determined, by the laws in force in Ontario.

6.9 Priority of Documents

If there is a discrepancy between the wording of any documents that appear on the list, the wording of the document that first appears on the list has priority over the wording of any document that subsequently appears on the list.

- (a) the Articles of Agreement;
- (b) the supplemental general conditions 4001 (2015-04-01) and 4006 (2010-08-16);
- (c) the general conditions 2030 (2020-05-28);
- (d) Annex A, Statement of Work including Appendix 1, 2 and 3;
- (e) Annex B, Basis of Payment;
- (f) the signed Task Authorizations (including all of its annexes, if any) (*if applicable*);
- (g) the Contractor's bid dated _____.

6.10 Defence Contract

The Contract is a defence contract within the meaning of the [Defence Production Act](#), R.S.C. 1985, c. D-1, and must be governed accordingly.

Title to the Work or to any materials, parts, work-in-process or finished work must belong to Canada free and clear of all claims, liens, attachments, charges or encumbrances. Canada is entitled, at any time, to remove, sell or dispose of the Work or any part of the Work in accordance with section 20 of the [Defence Production Act](#).

6.11 Insurance Requirements

The Contractor is responsible for deciding if insurance coverage is necessary to fulfill its obligation under the Contract and to ensure compliance with any applicable law. Any insurance acquired or maintained by the Contractor is at its own expense and for its own benefit and protection. It does not release the Contractor from or reduce its liability under the Contract.

6.12 Shipping Instructions

1. a Shipping Instructions - Foreign-based Contractors

1. Delivery will be FCA Free Carrier at _____ (*insert the named place at contract award*) Incoterms 2000. The Contractor must load the goods onto the carrier designated by the Department of National Defence (DND). Onward shipment from the delivery point to the consignee will be Canada's responsibility.
2. Before shipping the goods, the Contractor must contact the following DND Inbound Logistics Coordination Center by facsimile or e-mail, to arrange for shipment, and provide the information detailed at paragraph 3.

(Details of DND Inbound Logistics Coordination Center will be inserted at contract award when the location of the Contractor is known.)

3. The Contractor must provide the following information to the DND Inbound Logistics contact when arranging for shipment:
 - a. the Contract number;
 - b. consignee address (if multiple addresses, items must be packaged and labeled separately with each consignee address);
 - c. description of each item;
 - d. the number of pieces and type of packaging (e.g. carton, crate, drum, skid);
 - e. actual weight and dimensions of each piece type, including gross weight;
 - f. copy of the commercial invoice (in accordance with clause [C2608C](#), section 4, of the [Standard Acquisition Clauses and Conditions Manual](#)) or a copy of the Canada Border Services Agency form CI1 [Canada Customs Invoice](#) (PDF 429KB) - ([Help on File Formats](#));
 - g. [Schedule B](#) codes (for exports) and the Harmonized Tariff Schedule codes (for imports);
 - h. North American Free Trade Agreement Certificate of Origin (in accordance with clause [C2608C](#), section 2) for the U.S. and Mexico only;
 - i. full details of dangerous material, as required for the applicable mode of transportation, signed certificates for dangerous material as required for shipment by the International Maritime Dangerous Goods Code, or International Air Transport Association regulations or the applicable Canadian [Dangerous Goods Shipping Regulations](#) and a copy of the material safety data sheet.

4. Following receipt of this information by Canada, Canada will provide the appropriate shipping instructions, which may include the requirement for specific consignee address labelling, the marking of each piece with a Transportation Control Number and customs documentation.
5. The Contractor must not ship goods before receiving shipping instructions from the DND Inbound Logistics contact.
6. If the Contractor delivers the goods at a place and time that are not in accordance with the given delivery instructions or fail to fulfill reasonable delivery instructions given by Canada, the Contractor must reimburse Canada any additional expenses and costs incurred.
7. If Canada is responsible for delays in delivering the goods, ownership and risk will be transferred to Canada upon expiry of either thirty (30) days following the date on which a duly completed shipping application is received by Canada or by its appointed forwarding agent, or thirty (30) days following the delivery date specified in the Contract, whichever is later.

1.b Shipping Instructions - Canadian-based Contractors

1. Delivery will be FCA Free Carrier at _____ (*Insert the named place at contract award*) Incoterms 2000. The Contractor must load the goods onto the carrier designated by the Department of National Defence (DND). Onward shipment from the delivery point to the consignee will be Canada's responsibility.
2. Before shipping the goods, the Contractor must contact the following DND Inbound Logistics Coordination Center by facsimile or e-mail, to arrange for shipment, and provide the information detailed at paragraph 3.

Inbound Logistics Co-ordination Center (ILCC)
Telephone: 1-877-877-7423 (toll free)
Facsimile: 1-877-877-7409 (toll free)
E-mail: ILHQOttawa@forces.gc.ca

3. The Contractor must provide the following information to the DND Inbound Logistics Coordination Center when arranging for shipment:
 - a. the Contract number;
 - b. consignee address (for multiple addresses, items must be packaged and labelled separately with each consignee address);
 - c. description of each item;
 - d. the number of pieces and type of packaging (i.e., carton, crate, drum, skid);
 - e. actual weight and dimensions of each piece type, including gross weight;
 - f. full details of dangerous goods/hazardous products, as required for the applicable mode of transportation, signed certificates for dangerous goods/hazardous products as required for shipment by the International Maritime Dangerous Goods Code, the International Air Transport Association regulations or the applicable Canadian *Transportation of Dangerous Goods Regulations*, and a copy of the safety data sheet in English and French.
4. Following receipt of this information by Canada, Canada will provide the appropriate shipping instructions, which may include the requirement for specific consignee address labelling, and the marking of each piece with a Transportation Control Number.
5. The Contractor must not ship the goods before receiving shipping instructions from the DND Inbound Logistics contact.

6. If the Contractor delivers the goods at a place and time which are not in accordance with the given delivery instructions or fail to fulfill reasonable delivery instructions given by Canada, the Contractor must reimburse Canada any additional expenses and costs incurred.
7. If Canada is responsible for delays in delivering the goods, ownership and risk will be transferred to Canada upon expiry of either 30 days following the date on which a duly completed shipping application is received by Canada or by its appointed forwarding agent, or 30 days following the delivery date specified in the Contract, whichever is later.

6.13 Additional Package Markings - Identical

1. The Contractor must ensure that in addition to the required interior and exterior package markings, the following information is provided:
 - a. manufacturer's name;
 - b. manufacturer's part number;
 - c. description;
 - d. quantity/unit of issue;
 - e. date of manufacture;
 - f. contract number
2. These markings must be applied and positioned in accordance with Canadian Forces Packaging Specification D-LM-008-002/SF-001.

6.14 Packaging Requirement using Specification D-LM-008-036/SF-000

The Contractor must prepare the goods for delivery in accordance with the latest issue of the Canadian Forces Packaging Specification *D-LM-008-036/SF-000*, DND Minimum Requirements for Manufacturer's Standard Pack.

6.15 SACC Manual Clauses

B4061C (2008-05-12) North Atlantic Treaty Organization Codification – Data Requirements
B7500C (2006-06-16) Excess Goods
C2000C (2007-11-30) Taxes - Foreign-based Contractor
C2604C (2013-04-25) Customs Duties, Excise Taxes and Applicable Taxes – Non Resident
C2605C (2008-05-12) Canadian Customs Duties and Sales Tax – Foreign-based Contractor
C2610C (2007-11-30) Custom Duties – Department of National Defence - Importer
C2800C (2013-01-28) Priority Rating
C2801C (2017-08-17) Priority Rating - Canadian Contractors
D0050C (2007-05-25) End User Certificate
D2001C (2007-11-30) Labelling
D2017C (2008-05-12) Bar Coding – Material Marking
D2025C (2017-08-17) Wood Packaging Materials
D5545C (2019-05-30) ISO 9001:2015- Quality Management Systems (Quality Assurance Code C)
D5604C (2008-12-12) Release Documents (DND) - Foreign-based Contractor
D5605C (2010-01-11) Release Documents (DND) - United States-based Contractor
D5606C (2017-11-28) Release Documents (DND) - Canadian-based Contractor
D6010C (2007-11-30) Palletization

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

D9002C (2007-11-30) Incomplete Assemblies

6.16 Dispute Resolution

- (a) The parties agree to maintain open and honest communication about the Work throughout and after the performance of the contract.
- (b) The parties agree to consult and co-operate with each other in the furtherance of the contract and promptly notify the other party or parties and attempt to resolve problems or differences that may arise.
- (c) If the parties cannot resolve a dispute through consultation and cooperation, the parties agree to consult a neutral third party offering alternative dispute resolution services to attempt to address the dispute.
- (d) Options of alternative dispute resolution services can be found on Canada's Buy and Sell website under the heading "Dispute Resolution".

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

ANNEX “A” STATEMENT OF WORK

(SEE ATTACHED)

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

ANNEX “B”, BASIS OF PAYMENT

(SEE ATTACHED)

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

ANNEX “C” to PART 3 OF THE BID SOLICITATION

ELECTRONIC PAYMENT INSTRUMENTS

The Bidder accepts to be paid by any of the following Electronic Payment Instrument(s):

- ☐ Direct Deposit (Domestic and International);
- ☐ Electronic Data Interchange (EDI);
- ☐ Wire Transfer (International Only);

ANNEX "D" to PART 5 OF THE BID SOLICITATION

FEDERAL CONTRACTORS PROGRAM FOR EMPLOYMENT EQUITY – CERTIFICATION

I, the Bidder, by submitting the present information to the Contracting Authority, certify that the information provided is true as of the date indicated below. The certifications provided to Canada are subject to verification at all times. I understand that Canada will declare a bid non-responsive, or will declare a contractor in default, if a certification is found to be untrue, whether during the bid evaluation period or during the contract period. Canada will have the right to ask for additional information to verify the Bidder's certifications. Failure to comply with any request or requirement imposed by Canada may render the bid non-responsive or constitute a default under the Contract.

For further information on the Federal Contractors Program for Employment Equity visit [Employment and Social Development Canada \(ESDC\) – Labour's](#) website.

Date: _____ (YYYY/MM/DD) (If left blank, the date will be deemed to be the bid solicitation closing date.)

Complete both A and B.

A. Check only one of the following:

- ☐ A1. The Bidder certifies having no work force in Canada.
- ☐ A2. The Bidder certifies being a public sector employer.
- ☐ A3. The Bidder certifies being a [federally regulated employer](#) being subject to the [Employment Equity Act](#).
- ☐ A4. The Bidder certifies having a combined work force in Canada of less than 100 permanent full-time and/or permanent part-time employees.

A5. The Bidder has a combined workforce in Canada of 100 or more employees; and

- ☐ A5.1. The Bidder certifies already having a valid and current [Agreement to Implement Employment Equity](#) (AIEE) in place with ESDC-Labour.
- OR**
- ☐ A5.2. The Bidder certifies having submitted the [Agreement to Implement Employment Equity \(LAB1168\)](#) to ESDC-Labour. As this is a condition to contract award, proceed to completing the form Agreement to Implement Employment Equity (LAB1168), duly signing it, and transmit it to ESDC-Labour.

B. Check only one of the following:

- ☐ B1. The Bidder is not a Joint Venture.

OR

- ☐ B2. The Bidder is a Joint venture and each member of the Joint Venture must provide the Contracting Authority with a completed annex Federal Contractors Program for Employment Equity - Certification. (Refer to the Joint Venture section of the Standard Instructions)

Solicitation No. - N° de l'invitation
W8476-206139/A
Client Ref. No. - N° de réf. du client
W8476-206139

Amd. No. - N° de la modif.
File No. - N° du dossier
027qd.W8476-206139

Buyer ID - Id de l'acheteur
027QD
CCC No./N° CCC - FMS No./N° VME

ANNEX “E” DND 626 TASK AUTHORIZATION FORM

(SEE ATTACHED)



National Défense
Defence nationale

ANNEX A

Statement of Work (SOW)

For the Acquisition and Support of Assaulter Hub 2.0



NOTICE

This documentation has been reviewed by the technical authority and does not contain controlled goods.

AVIS

Cette documentation a été révisée par l'autorité technique et ne contient pas de marchandises contrôlées.

TABLE OF CONTENTS

1	SCOPE	3
1.1	Purpose	3
1.2	Background	3
1.3	Intended Use	3
1.4	List of Acronyms and Abbreviations	3
1.5	Terminology	4
2.1	References	6
2.2	Order of Precedence	7
3.0	REQUIREMENTS	7
3.1	Scope of Work	7
4.0	MEETINGS	8
4.1	Kick-off Meeting	8
4.2	Meeting Minutes	8
5.0	INTEGRATED LOGISTIC SUPPORT	8
5.1	Interface Control Documents	8
5.2	Technical Data	8
5.3	Equipment Identification Plate Data and Markings	9
5.4	User Manual	9
6.0	ADDITIONAL WORK REQUESTS (DND 626)	11
6.1	Additional Work	11
6.2	Travel and Living Expenses	11
7.0	QUALITY ASSURANCE	11
8.0	ACCEPTANCE PROCESS CRITERIA	11
9.0	DELIVERABLES	12
9.1	Firm Quantities	12
9.2	Option Quantities	13

LIST OF APPENDICES:

Appendix 1: Technical Requirement Specification - Assaulter Hub 2.0
Appendix 2: Technical Requirement Specification - Assaulter Hub 2.0 Cables & Accessories
Appendix 3: Fluids List

1 SCOPE

1.1 Purpose

- 1.1.1 The purpose of this Statement of Work (SOW) is to specify the requirements for the acquisition and support of Assaulter Hub 2.0 with associated Non-proprietary Cables and Accessories. Assaulter Hub 2.0 is the next generation Hub for soldiers in an assaulter type of role.

1.2 Background

- 1.2.1 The Integrated Soldier System (ISS) is a system in use by the Canadian Armed Forces (CAF) that supports the mission of the dismounted soldier by providing situational awareness and better command execution. The basic configuration of the ISS is composed of a Tactical User Interface (TUI), a radio, a Hub and a battery. The Hub is an important component to the ISS as it provides power and data distribution to other peripherals connected to the system. The CAF is interested in upgrading the existing Hub for soldiers in an assaulter role in order to benefit from the latest technological advancements available today.

1.3 Intended Use

- 1.3.1 Assaulter Hub 2.0 will be used as part of the Integrated Soldier System and multiple peripherals will connect to this device. As it will be worn by dismounted soldiers, the Assaulter Hub 2.0 will be exposed to adverse weather conditions. It will also be subject to various shocks induced from drops, and from dismounted soldier operations.

1.4 List of Acronyms and Abbreviations

- 1.4.1 Table 1. List of Acronyms

Abbreviation	Description
ABCANZ	American, British, Canadian, Australian, and New Zealand
ATAK	Android Tactical Assault Kit
AWR	Additional Work Request
BIT	Built In Test
CAF	Canadian Armed Forces
COTS	Commercial-Off-The-Shelf
DND	Department of National Defence
EMCON	Emission Control
EUD	End User Device
IAW	In Accordance With
ICD	Interface Control Document
ISS	Integrated Soldier System
ISS-S	Integrated Soldier System Suite
NATO	North Atlantic Treaty Organization
NCAGE	NATO Commercial and Government Entity

Abbreviation	Description
NSN	NATO Stock Number
SMBus	System Management Bus
SOW	Statement of Work
TA	Technical Authority
TUI	Tactical User Interface
USB	Universal Serial Bus

1.5 Terminology

1.5.1 Table 2. Definitions

Term	Definition
Assaulter	A soldier that detects and identify targets, conducts patrols, and engages enemy targets.
Assaulter Hub 2.0	Next generation Hub for soldiers in an assaulter role.
Built In Test	An integral capability of a device that provides an on-board test capability to detect, to diagnose, or isolate system failures.
Catastrophic Mishap Severity	Could result in death, permanent total disability, or irreversible or reversible severe environmental damage that violates law or regulation
Compatible	Able to be used together without causing malfunctions or a degradation of performance. Can be used with or without a specific piece of equipment (e.g.: cable), but without any software or hardware modification to the hub or to the connected device.
Critical Mishap Severity	Could result in permanent partial disability, injuries or occupational illness that may result in hospitalization, or reversible environmental damage causing a violation of law or regulation
Defect	A change in materiel characteristics, a Degradation of Performance, a Malfunction, or Physical Damage
Degradation of Performance	A situation where one or more requirements of this Statement of Work is not met.
End User Device	A COTS smartphone.
EUD port	Connection point on an electronic device where an End User Device can be attached.
Hub	A power and data distribution device. Contains multiple ports for connectivity to other devices.
Interface Control Document	Document that describes the interface(s) to a system or subsystem. It may describe the inputs and outputs of a single system or the interface between two systems or subsystems
Integrated Pigtail Cable	A cable permanently attached to the Assaulter Hub 2.0 on one end and terminated with a connector on the other end.

RDIMS # 5843647

Document Name: Assaulter Hub 2.0 Annex A - Statement of Work - Final

Page 4 of 24

Term	Definition
Integrated Soldier System	A system that aims to improve command execution, target acquisition and situational awareness to soldiers on the battlefield. The basic configuration of the system consists of a radio, a TUI, a Hub, and a battery.
Integrated Soldier System Suite	All equipment that the soldier wears and carries, including the software, electronic equipment, cables, vest and pouches, batteries and any other components.
Land Warrior Batteries	Batteries meeting all requirements of one or more of the following Military Performance Specification: MIL-PRF-32271/15, MIL-PRF-32383/1, and MIL-PRF-32383/2.
Malfunction	A Failure in distributing power and data to all connected devices.
Non-Operational State	An Assaulter Hub 2.0 which has a radio and a EUD connected. The Assaulter Hub 2.0 is powered down and is not distributing power and data to all connected devices.
Operational State	An Assaulter Hub 2.0 which has a battery, a radio, and a EUD connected. The Assaulter Hub 2.0 is powered by the battery, and distribute power and data to all connected devices with no malfunction or degradation of performance.
Peripheral Device	A device other than a battery, a EUD, and a radio.
Peripheral port	Connection point on an electronic device where another piece of equipment, other than a battery and a EUD, can be attached.
Physical Damage	Harm caused to something which results in a degradation of performance.
Port	A connection point on an electronic device where another piece of equipment can be attached, often using a cable.
Power port	Connection point on an electronic device where a SMBus compatible smart battery or a simple DC voltage input can be attached.
Radio port	Connection point on an electronic device where a Radio can be attached.
Radio Power Adaptor	Device that connects to a radio. Allows to power a radio through the centralized dismounted soldier system power source instead of the radio battery and can also trickle charge a radio battery through the centralized dismounted soldier system power source.
Tactical User Interface	A device comprising of an operating software, a touchscreen display, and computer processing circuitry

Term	Definition
Trickle charge	Charging a fully charged battery at a rate equal to its self-discharge rate, thus enabling the battery to remain at its fully charged level

APPLICABLE DOCUMENTS

2.1 References

2.1.1 The documents listed in this Section form part of the SOW. Unless otherwise specified, the issue or amendment of documents effective for this contract must be those in effect on the date of contract award.

2.1.2 DND Specifications, Standards and Publications

Reference Number	Promulgation Date	Reference Title
C-01-100-100/AG-005	2019-06-30	Acceptance of Commercial and Foreign Government Publications as Adopted Publications
D-02-002-001/SG-001	2003-04-01	Identification Marking of Canadian Military Property
D-01-400-002/SF-000	2018-07-31	Canadian Forces Specifications – Levels of Engineering Drawings

2.1.3 Other Standards and Publications

Reference Number	Promulgation Date	Reference Title
MIL-PRF-32271/15	2010-06-09	Performance Specification Sheet: Battery, Non-Rechargeable, Lithium, available at everyspec.com/MIL-STD
MIL-PRF-32383/1	2010-06-11	Performance Specification Sheet: Battery, Rechargeable, Lithium, available at everyspec.com/MIL-STD
MIL-PRF-32383/2	2010-06-11	Performance Specification Sheet: Battery, Rechargeable, Lithium, available at everyspec.com/MIL-STD
MIL-STD-461G	2015-12-11	Interface Standard: Requirements for the control of electromagnetic interference characteristics of subsystems and equipment, available at everyspec.com/MIL-STD
MIL-STD-464C	2010-12-01	Interface Standard: Electromagnetic environmental effects requirements for systems, available at everyspec.com/MIL-STD
MIL-STD-810H	2019-01-31	Test Method Standard: Environmental Engineering Considerations and Laboratory Tests, available at everyspec.com/MIL-STD
MIL-STD-1472G	2019-01-17	Design Criteria Standard: Human Engineering, available at everyspec.com/MIL-STD

RDIMS # 5843647

Document Name: Assaulter Hub 2.0 Annex A - Statement of Work - Final

Reference Number	Promulgation Date	Reference Title
MIL-STD-1686C	1995-10-25	Standard Practice: Electrostatic discharge control program for protection of electrical and electronic parts, assemblies and equipment (excluding electrically initiated explosive devices), available at everyspec.com/MIL-STD
NWPAN-WP-01112013	2017-10-20	Nett Warrior Interconnect Architecture White Paper, version 6, available at https://apps.dtic.mil/dtic/tr/fulltext/u2/1011122.pdf
SMBus	2018-04-19	System Management Bus (SMBus) Specification, available at smbus.org
USB 2.0	2000-04-27	Universal Serial Bus (USB) Revision 2.0 Specifications, available at www.usb.org
N/A	July 2017	Travel Directive, National Joint Council, available at www.njc-cnm.gc.ca/directive/d10/v238/en

2.2 Order of Precedence

- 2.2.1 In the event of a conflict between the content in this SOW and the referenced documents, the content of this SOW must take precedence.

3.0 REQUIREMENTS

3.1 Scope of Work

- 3.1.1 The Contractor must supply Assaulter Hub 2.0s, Non-proprietary Cables, and Accessories that meet all the requirements identified in Appendices 1 and 2. Quantity for each item is specified in section 9.
- 3.1.2 The Contractor must organize a Kick-off meeting.
- 3.1.3 The Contractor must provide Interface Control Documents for the Assaulter Hub 2.0, Cables, and Accessories.
- 3.1.4 The Contractor must provide Technical Data for the Assaulter Hub 2.0, Cables, and Accessories.
- 3.1.5 The Contractor must provide Identification Plates. This applies only to the components bought during the option periods.
- 3.1.6 The Contractor must provide a User Manual for the Assaulter Hub 2.0.
- 3.1.7 The Contractor must provide support IAW section 6.

4.0 MEETINGS

4.1 Kick-off Meeting

- 4.1.1 The Kick-off meeting must take place within twenty-eight (28) working days after contract award (or mutually agreed upon dates). Canada and their designated representatives will participate in the Kick-off meeting. The purpose of this meeting is to review the specific contract documents.

4.2 Meeting Minutes

- 4.2.1 The meeting minutes must be recorded and prepared by the Contractor.
- 4.2.2 The meeting minutes must provide a summary of the discussion and key decision points established during the meeting.
- 4.2.3 Signature blocks for both Contractor and Canada responsible representatives are required on the Kick-off meeting minutes.
- 4.2.4 The meeting minutes must be provided to Canada no later than five (5) working days after the Kick-off meeting.

5.0 INTEGRATED LOGISTIC SUPPORT

5.1 Interface Control Documents

- 5.1.1 The ICDs for the Assaulter Hub 2.0, Cables, and Accessories must include the following information:
- a) Connector part number and manufacturer;
 - b) Connector Pinout and Pin description;
 - c) Cable wiring diagrams; and
 - d) Connector technical drawings.

5.2 Technical Data

- 5.2.1 Technical Data for the Assaulter Hub 2.0, Cables, and Accessories must be:
- a) Engineering drawing (minimum level 2 - in accordance with D-01-400-002/SF-000), or
 - b) Industrial specification data / information sheets from the true (Design Control) manufacturer.

5.2.2 The Technical Data must clearly provide the following information:

- a) Item Name;
- b) The manufacturer's unique part number;
- c) The Design Control Authority NCAGE code, or their full name and address;
- d) Dimensions and tolerances;
- e) Materials;
- f) Protective coating (if applicable) and surface color and finish;
- g) Performance data, including the environmental and operating conditions under which the item must perform;
- h) Electrical characteristics; and
- i) Special features which contributed to the uniqueness of the item.

5.2.3 Canada will provide the Contractor with a list of applicable NSNs within sixty (60) working days after the reception and acceptance of the Technical Data Package.

5.2.4 Once received from Canada, the Contractor must update all applicable documentation with the NSN identifier.

5.3 Equipment Identification Plate Data and Markings

5.3.1 The Contractor must provide identification plates for the Assaulter Hub 2.0, Non-proprietary Cables, and all Accessories in accordance with Canadian Forces Standard D-02-002-001/SG-001: Identification Marking of Canadian Military Property.

5.3.2 The identification plates must be affixed to the Assaulter Hub 2.0 and all associated cables and accessories.

5.3.3 The identification plates must be sent to Canada for approval prior to their production.

5.3.4 The Contractor must allow ten (10) working days for the review of the identification plates.

5.3.5 The Contractor must provide Linear (One-Dimensional) Bar Code Symbologies for the assaulter Hub 2.0

5.3.6 In addition, equipment must be labelled with a Unique Identifier in accordance with NATO Standardization Agreement (STANAG) 2290 Edition 2.

5.4 User Manual

5.4.1 User Manual must be in accordance with Canadian Forces Standard C-01-100-100/AG-005: Specification Acceptance of Commercial and Foreign Government Publications as Adopted Publications.

5.4.2 Separate User Manual must be provided in English and in French.

- 5.4.3 User Manual must be in searchable PDF format and be delivered to the Technical Authority.

6.0 ADDITIONAL WORK REQUESTS (DND 626)

6.1 Additional Work

- 6.1.1 There may be a requirement for additional work to be performed. This requirement encompasses work that is over and above the current Contract requirements, but is within the scope of the work. The manner in which this work will be accomplished is via an Additional Work Request (AWR). An AWR will be implemented in accordance with the Contract Articles of Agreement, using the form DND 626 Task Authorization. Pricing will be determined using the rates and mark-ups contained in the Basis of Payment at Annex B.

6.2 Travel and Living Expenses

- 6.2.1 Where the satisfactory performance of approved Additional Work Requests entails Travel and Living Expenses, the Contractor will be reimbursed for these expenses reasonably and properly incurred in the performance of the Work. The reimbursement will be at cost without allowances for profit and/or administrative overhead. The reimbursement will be in accordance with the Treasury Board Travel Directive or the Contractor's internal policies, whichever is less. The applicable items in the Treasury Board Travel Directive are:
- a) The provisions in the directive referring to "travelers", rather than those referring to "employees"; and
 - b) The meal, private vehicle and incidental expenses provided in Appendices B, C and D.

7.0 QUALITY ASSURANCE

- 7.1.1 Contractor must have one or more of the following certifications:
- a) ISO 9001; or
 - b) AS9100D

8.0 ACCEPTANCE PROCESS CRITERIA

- 8.1.1 The firm quantity of Assaulter Hub 2.0s, Non-proprietary Cables, Accessories, Technical Data, and the Interface Control Documents must be delivered to Canada for integration and testing by the ISS Support Contractor, Rheinmetall Canada Inc.

9.0 DELIVERABLES

9.1 Firm Quantities

9.1.1 List of deliverables

Item Number	Item Description	Firm Quantity	Delivery Date
1	Assaulter Hub 2.0	450	No later than sixteen (16) weeks after Kick-off Meeting.
2	Battery Cable	450	No later than sixteen (16) weeks after Kick-off Meeting.
3	Harris AN/PRC-163 Radio Cable (black data) *See 9.1.2	450	No later than sixteen (16) weeks after Kick-off Meeting.
4	Harris AN/PRC-163 Radio Cable (red data) *See 9.1.2	450	No later than sixteen (16) weeks after Kick-off Meeting.
5	Harris AN/PRC-163 Radio Cable (black and red data)	450	No later than sixteen (16) weeks after Kick-off Meeting.
6	Harris AN/PRC-163 Radio Power Adaptor	450	No later than sixteen (16) weeks after Kick-off Meeting.
7	Harris RF-7800S Radio Cable	450	No later than twenty (20) weeks after the Kick-off meeting.
8	Harris RF-7800S Radio Power Adaptor	450	No later than twenty (20) weeks after the Kick-off meeting.
9	USB type A receptacle Cable	450	No later than sixteen (16) weeks after Kick-off Meeting.
10	MOLLE Clip for Assaulter Hub 2.0	450	No later than sixteen (16) weeks after Kick-off Meeting.

9.1.2 If Harris AN/PRC-163 Radio Cable (black and red data) are available, both Harris AN/PRC-163 Radio Cables (black data) and Harris AN/PRC-163 Radio Cables (red data) are not required.

9.2 Option Quantities

9.2.1 Options are not firm orders. Canada may or may not exercise one or all items within the table at clause 9.2.2. The Optional Requirements do not in any way constitute a commitment on behalf of Canada. Canada may exercise the quantities at any time throughout the exercised Optional years.

9.2.2 List of deliverables (option quantities)

Item Number	Item Description	Option Quantity (up to)	Delivery Date
1	Assaulter Hub 2.0	2250	No later than sixteen (16) weeks after Order Confirmation.
2	Battery Cable	2250	No later than sixteen (16) weeks after Order Confirmation.
3	Harris AN/PRC-163 Radio Cable (black data)	2250	No later than sixteen (16) weeks after Order Confirmation.
4	Harris AN/PRC-163 Radio Cable (red data)	2250	No later than sixteen (16) weeks after Order Confirmation.
5	Harris AN/PRC-163 Radio Cable (black and red data)	2250	No later than sixteen (16) weeks after Order Confirmation.
6	Harris AN/PRC-163 Radio Power Adaptor	2250	No later than sixteen (16) weeks after Order Confirmation.
7	Harris RF-7800S Radio Cable	2250	No later than twenty (20) weeks after Order Confirmation.
8	Harris RF-7800S Radio Power Adaptor	2250	No later than twenty (20) weeks after the Order Confirmation.
9	USB type A receptacle Cable	2250	No later than sixteen (16) weeks after Order Confirmation.
10	MOLLE Clip for Assaulter Hub 2.0	2250	No later than sixteen (16) weeks after Order Confirmation.

APPENDIX 1 – TECHNICAL REQUIREMENT SPECIFICATION - ASSAULTER HUB 2.0

1.0 GENERAL REQUIREMENTS

1.1 Non-Developmental Item

1.1.1 Assaulter Hub 2.0 must be:

- a) Tested and ISO 9001 or AS9001D Certified
- b) In current production or have been within the past 12 months;
- c) In-use by ABCANZ member armed forces and a quantity greater than 650 units sold to the armed forces;
- d) Provided with identification plates and linear Barcode Symbologies.

2.0 PHYSICAL REQUIREMENTS

2.1 Size

2.1.1 Dimensions of Assaulter Hub 2.0 must not exceed the following measurements:

- a) Length: 130mm;
- b) Width: 50mm; and
- c) Thickness: 30mm.

Dimensions of Integrated Pigtail Cables, if they exist, are excluded from the overall dimensions of the Assaulter Hub 2.0.

2.2 Weight

2.2.1 The weight of the Assaulter Hub 2.0 must not exceed 250g. Overall weight includes weight of the Protective Covers.

2.3 Finish and Color

2.3.1 Assaulter Hub 2.0 must have a:

- a) Non-reflective flat green finish;
- b) Non-reflective flat black finish;
- c) Non-reflective flat brown finish; or
- d) Non-reflective flat gray finish.

3.0 INTERFACE REQUIREMENTS

3.1 Connectors

3.1.1 All Assaulter Hub 2.0 ports must be equipped with connectors that mates with the connectors specified in Nett Warrior Interconnect Architecture White Paper (NWPAN-WP-01112013) version 6, Table IV.

- 3.1.2 The Assaulter Hub 2.0 must not have more than Five (5) connectors.
- 3.1.3 Pin Assignment of all Assaulter Hub 2.0 6-Pin connectors must be IAW Nett Warrior Interconnect Architecture White Paper (NWPAN-WP-01112013) version 6, Section 4.0.
- 3.1.4 All Assaulter Hub 2.0 7-Pin connectors must mate with 6-Pin connectors without causing defects to the Assaulter Hub 2.0 and all connected devices.

3.2 Protective Covers

- 3.2.1 Each Assaulter Hub 2.0 port must be equipped with a Protective Cover.
- 3.2.2 Each Protective Cover must be removable.
- 3.2.3 Each Protective Cover must be attached to the Assaulter Hub 2.0 physical device.
- 3.2.4 Each Protective Cover must be replaceable if broken.

3.3 Ports

3.3.1 General

- 3.3.1.1 All Peripheral, EUD and Radio ports must be compliant with a minimum of Universal Serial Bus (USB) Revision 2.0 Specifications.

3.3.2 Power Ports

- 3.3.2.1 All power ports must be compliant with the System Management Bus (SMBus) Specification.
- 3.3.2.2 All power ports must accept the input voltage range of 10 to 20 VDC.
- 3.3.2.3 All power and ground connections on the Assaulter Hub 2.0 ports must be rated for no less than 5 Amp.

3.4 Port Configuration

- 3.4.1 The Assaulter Hub 2.0 must accept and have simultaneously connected the following components:
 - a) Two (2) Land Warrior Batteries;
 - b) One (1) EUD;
 - c) Harris RF-7800S Radio; and
 - d) One (1) peripheral device.

3.5 Integrated Pigtail Cables

- 3.5.1 Assaulter Hub 2.0 must not have any Integrated Pigtail Cables.

4.0 FUNCTIONAL REQUIREMENTS

4.1 Power Distribution and Management

- 4.1.1 Assaulter Hub 2.0 must distribute battery or DC input power, up to the limits specified in section 3.3.2, to all ports.
- 4.1.2 Assaulter Hub 2.0 must monitor power consumption on each port.
- 4.1.3 Power monitoring must be displayed through an application software installed on the connected EUD.
- 4.1.4 Assaulter Hub 2.0 must have the ability to distribute power and data to user selected ports.
- 4.1.5 Power and Data Distribution must be displayed and controlled through an application software installed on the connected EUD.

4.2 Hot Swapping Capability

- 4.2.1 Users must be able to replace batteries connected to Assaulter Hub 2.0 without:
- a) Loss of data; and
 - b) Stopping, shutting down, or rebooting the ISS.
- 4.2.1.1 This requirement applies when the EUD or the Radio have no dedicated or internal power source and are instead powered by the connected battery via the Assaulter Hub 2.0.
- 4.2.2 When two (2) power sources are connected, the Assaulter Hub 2.0 must automatically switch between power sources when one power source is depleted.

4.3 Compatibility with other peripherals

- 4.3.1 Assaulter Hub 2.0 must be compatible with rechargeable Land Warrior Batteries;
- 4.3.2 Assaulter Hub 2.0 must be compatible with non-rechargeable Land Warrior Batteries;
- 4.3.3 Assaulter Hub 2.0 must be compatible with Harris RF-7800S Radio;
- 4.3.4 Assaulter Hub 2.0 must be compatible with Harris AN/PRC-163 Radio;
- 4.3.5 Assaulter Hub 2.0 must be compatible with a EUD running ATAK software application;

4.3.6 Assaulter Hub 2.0 must be compatible with the Defense Advanced GPS Receiver (DAGR); and

4.3.7 Assaulter Hub 2.0 must be compatible with a USB External Storage Drive.

4.3.8 A list of compatible devices with the Assaulter Hub 2.0 must be supplied.

4.4 USB Data Exchange

4.4.1 The Assaulter Hub 2.0 must act as a USB hub IAW with a minimum of USB 2.0 Specification. USB mechanical connector specifications are excluded from this requirement.

5.0 SUSTAINABILITY REQUIREMENTS

5.1 Reliability

5.1.1 The Assaulter Hub 2.0 must have a Mean Time Between Failure (MTBF) not less than 5000 hours.

5.2 Power Draw

5.2.1 The Assaulter Hub 2.0 must draw no more than 1 Watt when connected to a single power source with no other devices connected.

5.3 Built In Test (BIT)

5.3.1 The Assaulter Hub 2.0 must perform a BIT during initial system power up.

5.3.2 The Assaulter Hub 2.0 must perform a BIT at the command of the user via software installed on the connected EUD.

5.3.3 Results of the BIT must be displayed on the connected EUD via a software installed.

5.3.4 Results of the BIT must be stored within the processing circuitry of Assaulter Hub 2.0.

5.3.5 Results of the BIT must be accessible.

5.4 Recovery from Electrical Faults

5.4.1 Assaulter Hub 2.0 must recover from automatically from an over-voltage when the fault is removed.

5.4.2 Assaulter Hub 2.0 must recover automatically from an over-current when the fault is removed.

6.0 ENVIRONMENT CONDITIONS

6.1 General

- 6.1.1 Assaulter Hub 2.0 must meet all performance requirements of this Technical Requirement Specification without incurring one or more defects during and after exposure to any combination of the meteorological and induced climatic conditions described in this section: Physical Damage, Malfunction, and Degradation of Performance.

6.2 Low Pressure (Altitude)

- 6.2.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to all altitudes from sea level to 4572 meters.

6.3 High Temperature - Operation

- 6.3.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to all high temperature environments associated with the A3, A2 and A1 (+49°C max) climatic regions as described in MIL-STD-810H.

6.4 High Temperature - Storage

- 6.4.1 Assaulter Hub 2.0 must be stored without incurring one or more defects during and after being exposed to all high temperature environments associated with the A3, A2, and A1 climatic regions as described in MIL-STD-810H.

6.5 Low Temperature - Operation

- 6.5.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to all low temperature environments associated with a C0 and C1 (-30°C min) climatic region as described in MIL-STD-810.

For this requirement, the lower boundary of the C1 climatic region will be evaluated at -30°C.

6.6 Low Temperature - Storage

- 6.6.1 Assaulter Hub 2.0 must be stored without incurring one or more defects during and after being exposed to all low temperature environments associated with a C0 and C1 (-30°C min) climatic region as described in MIL-STD-810.

For this requirement, the lower boundary of the C1 climatic region will be evaluated at -30°C.

6.7 Temperature Shock

- 6.7.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to conditions of rapid changes in ambient air temperature as encountered during movements between in-door environments and out-door environments at either high temperature (+49°C) and low temperature (-30°C) extremes.

For this requirement, the Assaulter Hub 2.0 did not require any physical modifications or preparations in advance.

6.8 Contamination by Fluids

- 6.8.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed with the fluids listed in Appendix 3 – Fluids List.

6.9 Solar Radiation (Sunshine)

- 6.9.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed in all high solar radiation environments associated with A1 and A2 climatic regions as described in MIL-STD-810H.

6.10 Rain

- 6.10.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to conditions of rainfall exposure of a minimum 1.7 mm/min as described in MIL-STD-810H.

6.11 Humidity

- 6.11.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to all high humidity environments associated with B1, B2 and B3 climatic regions as described in MIL-STD-810H.

6.12 Fungus

- 6.12.1 Assaulter Hub 2.0 must not contain materials that support fungus growth.

6.13 Salt fog

- 6.13.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to a salt fog atmosphere.

6.14 Sand and Dust

- 6.14.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to a blowing sand and dust environment.

6.15 Explosive Atmosphere

- 6.15.1 Assaulter Hub 2.0 must not constitute a hazard in an explosive environment.

6.16 Water Immersion

- 6.16.1 During and after a water immersion of one (1) meter depth for a minimum of 30 minutes, the Assaulter Hub 2.0 must:
- a) not allow water or moisture ingress; and
 - b) operate without incurring one or more defects.

6.17 Vibration

- 6.17.1 Assaulter Hub 2.0 must operate without incurring one or more defects after and during being exposed to vibrations of military ground vehicles.

6.18 Functional Shock

- 6.18.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to shocks associated with dismounted soldier operations.

6.19 Transit Drop

- 6.19.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after experiencing 1.22m drops.

6.20 Electric field, radiated susceptibility

- 6.20.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to an electrical field of 50V/m at frequencies of 2MHz to 18GHz.

6.21 Emission Control (EMCON)

- 6.21.1 Assaulter Hub 2.0 must meet the EMCON requirement from section 5.14 of MIL-STD-464C. Frequencies tested are outside of 225-450MHz frequency range.

6.22 Electrostatic Discharge

- 6.22.1 Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to electrostatic discharges.

7.0 HEALTH AND SAFETY

7.1 General

- 7.1.1 Assaulter Hub 2.0 must not present environmental, health or system safety hazards of a Catastrophic or Critical mishap severity.

- 7.1.2 Assaulter Hub 2.0 must not present a Catastrophic or Critical hazard to the operator and surrounding environment even when so damaged that it allows the ingress of water, egress of internal substances, or foreign material.

7.2 Mechanical Safety

- 7.2.1 Assaulter Hub 2.0 must bear no raw, sharp, or rough edges on any parts.

7.3 Thermal Contact Hazard

- 7.3.1 The maximum allowable surface contact temperatures for the Assaulter Hub 2.0 must be in accordance with MIL-STD-1472G section 5.7.6.9 Thermal contact hazards.

APPENDIX 2: TECHNICAL REQUIREMENT SPECIFICATION – ASSAULTER HUB 2.0 CABLES & ACCESSORIES

1.0 PHYSICAL REQUIREMENTS

1.1 Size

1.1.1 Length of Assaulter Hub 2.0 cables must not exceed the values below:

Cable Name	Length (mm)
Battery cable	1500
Harris AN/PRC 163 Radio cable (black data)	1500
Harris AN/PRC 163 Radio cable (red data)	1500
Harris AN/PRC 163 Radio cable (black and red data)	1500
Harris RF-7800S Radio cable	1500
USB type A receptacle cable	1500

1.2 Finish and Color

1.2.1 All Assaulter Hub 2.0 cables must have the same finish and color as the Assaulter Hub 2.0.

2.0 INTERFACE REQUIREMENTS

2.1 Connectors

2.1.1 All cable connectors:

- a) must mate with Assaulter Hub 2.0 connectors on one end; and
- b) must mate with the device connector(s) on the other end(s).

3.0 FUNCTIONAL REQUIREMENTS

3.1 Power Distribution and Management

3.1.1 All Assaulter Hub 2.0 cables must provide power and data from the Hub to the device through the same cable.

4.0 ENVIRONMENT CONDITIONS

4.1 General

- 4.1.1 All Assaulter Hub 2.0 Cables and Accessories must meet all performance requirements in this technical requirement specification without incurring physical damage and without degradation of performance, during and after exposure to any combination of the meteorological and induced climatic conditions described in the technical requirement specification of Assaulter Hub 2.0.

5.0 HEALTH AND SAFETY

5.1 General

- 5.1.1 All Assaulter Hub 2.0 Cables and Accessories must not present environmental, health or system safety hazards of a Catastrophic or Critical mishap severity.
- 5.1.2 All Assaulter Hub 2.0 Cables and Accessories must not present a Catastrophic or Critical hazard to the operator and surrounding environment even when so damaged that it allows the ingress of water, egress of internal substances, or foreign material.

5.2 Mechanical Safety

- 5.2.1 All Assaulter Hub 2.0 Cables and Accessories must bear no raw, sharp, or rough edges on any parts.

5.3 Thermal Hazard

- 5.3.1 The maximum allowable surface contact temperatures for all Assaulter Hub 2.0 Cables and Accessories must be in accordance with MIL-STD-1472G section 5.7.6.9 Thermal contact hazards.

APPENDIX 3: FLUID LIST

1.0 LIST OF FLUIDS

1.1.1 List of fluids below:

- a) Insect repellent (NSN 6840-01-284-3982, Crème, approx 32% Deet);
- b) Degreasing Solvent (MIL-PRF-680B);
- c) Weapon cleaning solvents (MIL-PRF-372D);
- d) Lubricating oil, general purpose (MIL-PRF-32033);
- e) Camouflage cream;
- f) Reactive Skin Decontaminant Lotion (RSDL);
- g) Salt water (real or simulated);
- h) Unleaded gasoline (CAN/CGSB 3.5);
- i) Hydraulic fluid (Mineral oil / petroleum based NATO H-520/NATO H-515);
- j) Kerosene (Commercial fuel CAN/CGSB 3.3);
- k) Automatic Transmission fluid (Dexron III or Allison TES 228);
- l) Lubricant, semi-fluid, automatic weapons (MIL-L-46000);
- m) Lubricating oil, weapons, low temperature (MIL-PRF-14107);
- n) Anti-freeze (A-A-52624A Type I ethylene glycol-based and Type II propylene glycol-based);
- o) Engine oil (MIL-PRF-2104H, 15W40); and
- p) Diesel fuel (On-road CAN/CGSB 3.517).




National Défense
Defence nationale

APPENDIX 4 to Annex A

Technical Evaluation Matrix

For the Acquisition and Support of Assaulter Hub 2.0s



NOTICE

This documentation has been reviewed by the technical authority and does not contain controlled goods.

AVIS

Cette documentation a été révisée par l'autorité technique et ne contient pas de marchandises contrôlées.

1 GENERAL

1.1 General Instructions

- 1.1.1 The Bidder must fill out the Bidder's Compliance and the Bidder Response columns of Appendix 4 to Annex A, Technical Evaluation Matrix.

1.2 List of Acronyms and Abbreviations

- 1.2.1 Refer to the List of Acronyms and Abbreviations Section in Annex A - Statement of Work.

1.3 Terminology

- 1.3.1 Refer to the Terminology Section in Annex A - Statement of Work.

1.4 Applicable Documents

- 1.4.1 Refer to the Applicable Documents Section in Annex A - Statement of Work.

2 MANDATORY REQUIREMENTS

2.1 General

- 2.1.1 Bidder technical responses must include the information required in the Bidder's Response column for each mandatory requirement according to the method identified in the "Compliance Method" column.

2.2 Compliance Methods

2.2.1 Analysis Report

- 2.2.1.1 A document that provides evidence that the stated requirements are met. Support for the validation of the Analysis Report's findings must include one or more of the following:

- a) mathematical models;
- b) simulations;
- c) algorithms;
- d) calculations;
- e) charts;
- f) graphs;
- g) drawings;
- h) photos;
- i) dimensions;
- j) representative data,
- k) other scientific principles and procedures.

2.2.2 Certificate of Compliance

2.2.2.1 A document that certifies that the product or entity meets a specific standard. The certificate must:

- a) be issued by a qualified Third-Party Testing Facility or Agency; and
- b) contain the following information:
 - i) Name of the Third-Party Testing Facility or Agency; and
 - ii) Certificate number; and
 - iii) Date of issuance; and
 - iv) Name of the entity or the product; and
 - v) Applicable standards, or sections, or methods;

2.2.3 Explanation

A description which

2.2.3.1

- a) contains sufficient detail that demonstrates the requirement is met;
- b) is supported by one or more of the following justifications:
 - i) drawings;
 - ii) dimensions;
 - iii) calculations;
 - iv) graphs;
 - v) photos;
 - vi) data sheets;
 - vii) user manuals;
 - viii) description of the product.

Table 1: Bid Evaluation Matrix – Assault Hub 2.0

Req. #	Requirement Statement	Method of Compliance	Additional Instructions to Bidder and Evaluation Criteria	Bidder's Response
SOW 8.0	QUALITY ASSURANCE			
SOW 8.1.1	Contractor must have one or more of the following certifications: a) ISO 9001; or b) AS9100D	Certificate of Compliance	The technical evaluation criteria will be met if the certificate demonstrates that the requirement is met.	
Assault Hub 2.0 Specs 1.0	GENERAL REQUIREMENTS			
Assault Hub 2.0 Specs 1.1	Non-Developmental Item			
Assault Hub 2.0 Specs 1.1.1	Hub 2.0 must be: a) Tested and certified; b) In current production or have been within the past 12 months; c) In-use by ABCANZ member armed forces and a quantity greater than 650 units sold to the armed forces; and d) Provided with identification plates and linear Barcode Symbolologies. In-use by ABCANZ member armed forces and a quantity greater than 650 units sold to the armed forces;	Explanation	Bidder must provide the following information in their Explanation: a) Model number of the product; b) Confirmation that the product is currently in production or has been within the past 12 months; c) A quantity of the proposed equipment greater than 650 units sold to ABCANZ armed forces members; and d) Identification Plates and Linear Barcode Symbolologies. A quantity of the proposed equipment greater than 650 units sold to ABCANZ armed forces members; This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Specs 2.0	PHYSICAL REQUIREMENTS				
Assaulter Hub 2.0 Specs 2.1	Size				
Assaulter Hub 2.0 Specs 2.1.1	Dimensions of Assaulter Hub 2.0 must not exceed the following measurements: a) Length: 130mm; b) Width: 50mm; and c) Thickness: 30mm Dimensions of Integrated Pigtail Cables, if they exist, are excluded from the overall dimensions of the Assaulter Hub 2.0	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met. See Figure 1 for an example of Hub Dimensions.		
Assaulter Hub 2.0 Specs 2.2	Weight				
Assaulter Hub 2.0 Specs 2.2.1	The weight of Assaulter Hub 2.0 must not exceed 250g. Overall weight includes weight of the Protective Covers.	Explanation	The technical evaluation criteria will be met if the certificate demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 2.3	Finish and Color				
Assaulter Hub 2.0 Specs 2.3.1	Assaulter Hub 2.0 must have a: a) Non-reflective flat green finish; or b) Non-reflective flat black finish; or c) Non-reflective flat brown finish; or d) Non-reflective flat gray finish.	Explanation	The technical evaluation criteria will be met if the certificate demonstrates that the requirement is met.		

INTERFACE REQUIREMENTS				
Connectors				
Assaulter Hub 2.0 Specs 3.0				
Assaulter Hub 2.0 Specs 3.1				
Assaulter Hub 2.0 Specs 3.1.1	All Assaulter Hub 2.0 ports must be equipped with connectors that mates with the connectors specified in Nett Warrior Interconnect Architecture White Paper (NWPAN-WP-01112013) version 6, Table IV.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.1.2	The Assaulter Hub 2.0 must not have more than five (5) connectors.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.1.3	Pin Assignment of all Assaulter Hub 2.0 6-Pin connectors must be IAW Nett Warrior Interconnect Architecture White Paper (NWPAN-WP-01112013) version 6, Section 4.0.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.1.4	All Assaulter Hub 2.0 7-Pin connectors must mate with 6-Pin connectors without causing defects to the Assaulter Hub 2.0 and all connected devices.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Protective Covers				
Assaulter Hub 2.0 Specs 3.2				
Assaulter Hub 2.0 Specs 3.2.1	Each Assaulter Hub 2.0 ports must be equipped with a Protective Cover.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.2.2	Each Protective Cover must be removable	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Specs 3.2.3	Each Protective Cover must be attached to the Assaulter Hub 2.0 physical device.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.2.4	Each Protective Cover must be replaceable if the protective cover is damaged.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.3	Ports			
Assaulter Hub 2.0 Specs 3.3.1	<u>General</u>			
Assaulter Hub 2.0 Specs 3.3.1.1	All Peripheral, EUD and Radio ports must be compliant with a minimum of Universal Serial Bus (USB) Revision 2.0 Specifications.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.3.2	<u>Power Ports</u>			
Assaulter Hub 2.0 Specs 3.3.2.1	All power ports must be compliant with the System Management Bus (SMBus) Specification.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.3.2.2	All power ports must accept the input voltage range of 10 to 20 VDC	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 3.3.2.3	All power and ground connections on the Assaulter Hub 2.0 ports must be rated for no less than 5 Amp.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Specs 3.4					
Port Configuration					
Assaulter Hub 2.0 Specs 3.4.1	The Assaulter Hub 2.0 must be simultaneously connected and communicated with the following components: a) Two (2) Land Warrior Batteries; b) One (1) EUD; c) Harris RF-7800S Radio; and d) One (1) peripheral device.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 3.5	Integrated Pigtail Cables				
Assaulter Hub 2.0 Specs 3.5.1	Assaulter Hub 2.0 must not have any Integrated Pigtail Cables.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
FUNCTIONAL REQUIREMENTS					
Power Distribution and Management					
Commander Hub 2.0 Specs 4.0 v Assaulter Hub 2.0 Specs 4.1					
Assaulter Hub 2.0 Specs 4.1.1	Assaulter Hub 2.0 must distribute battery or DC input power, up to the limits specified in section 3.3.2, to all ports.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 4.1.2	Assaulter Hub 2.0 must monitor power consumption on each port.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		

Assaulter Hub 2.0 Specs 4.1.3	Power monitoring must be displayed through an application software installed on the connected EUD.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.1.4	Assaulter Hub 2.0 must have the ability to distribute power and data to user selected ports.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.1.5	Power and Data Distribution must be displayed and controlled through an application software installed on the connected EUD.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.2	Hot Swapping Capability			
Assaulter Hub 2.0 Specs 4.2.1	Users must be able to replace batteries connected to Assaulter Hub 2.0 without: a) Loss of data; and b) Stopping, shutting down, or rebooting the ISS. For this requirement, Assaulter Hub 2.0 is only connected to an EUD, a radio, and a battery. Both the EUD and the radio have no dedicated or internal power source and are instead powered by the connected battery.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Specs 4.2.2	When two (2) power sources are connected, the Assaulter Hub 2.0 must automatically switch between power sources when one power source is depleted. For this requirement, Assaulter Hub is only connected to two (2) power sources with no other devices connected.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3	Compatibility			
Assaulter Hub 2.0 Specs 4.3.1	Assaulter Hub 2.0 must be compatible with rechargeable Land Warrior Batteries	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.2	Assaulter Hub 2.0 must be compatible with non-rechargeable Land Warrior Batteries	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.3	Assaulter Hub 2.0 must be compatible with Harris RF-7800S Radio	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.4	Assaulter Hub 2.0 must be compatible with Harris AN/PRC-163 Radio	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.5	Assaulter Hub 2.0 must be compatible with a EUD running ATAK software application.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.6	Assaulter Hub 2.0 must be compatible with the Defense Advanced GPS Receiver (DAGR)	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 4.3.7	Assaulter Hub 2.0 must be compatible with a USB External Storage Drive	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Specs 4.3.8	A list of compatible devices with the Assaulter Hub 2.0 must be supplied.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met	
Assaulter Hub 2.0 Specs 4.3.9	Assaulter Hub 2.0 must be compatible and fully functional with non-proprietary cables.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met. Assaulter Hub 2.0 must function with generic cables and not be locked to specific cables often produced with integrated chips.	
Assaulter Hub 2.0 Specs 4.4	USB Data Exchange			
Assaulter Hub 2.0 Specs 4.4.1	The Assaulter Hub 2.0 must act as a USB hub IAW with a minimum of USB 2.0 Specification. USB mechanical connector specifications are excluded from this requirement.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Specs 5.0	SUSTAINABILITY REQUIREMENTS			
Assaulter Hub 2.0 Specs 5.1	Reliability			
Assaulter Hub 2.0 Specs 5.1.1	The Assaulter Hub 2.0 must have a Mean Time Between Failure not less than 5000 hours.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Power Draw					
Assaulter Hub 2.0 Specs 5.2					
Assaulter Hub 2.0 Specs 5.2.1	The Assaulter Hub 2.0 must draw no more than 1 Watt when connected to a single power source with no other devices connected.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Built In Test (BIT)					
Assaulter Hub 2.0 Specs 5.3					
Assaulter Hub 2.0 Specs 5.3.1	The Assaulter Hub 2.0 must perform a BIT during initial system power up.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 5.3.2	The Assaulter Hub 2.0 must perform a BIT at the command of the user via software installed on the connected EUD.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 5.3.3	Results of the BIT must be displayed on the connected EUD via a software installed.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 5.3.4	Results of the BIT must be stored within the processing circuitry of Assaulter Hub 2.0.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 5.3.5	Results of the BIT must be accessible.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Recovery from Electrical Faults					
Assaulter Hub 2.0 Specs 5.4					
Assaulter Hub 2.0 Specs 5.4.1	Assaulter Hub 2.0 must recover automatically from an over-voltage when the fault is removed.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 5.4.2	Assaulter Hub 2.0 must recover automatically from an over-current when the fault is removed.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		

ENVIRONMENT CONDITIONS				
Assault Hub 2.0 Specs 6.0	General			
Assault Hub 2.0 Specs 6.1				
Assault Hub 2.0 Specs 6.1.1	Assault Hub 2.0 must meet all performance requirements of this Technical Requirement Specification without incurring one or more of the following defects during and after exposure to any combination of the meteorological and induced climatic conditions described in this section: <ul style="list-style-type: none"> - physical damage, - malfunction, and - degradation of performance. 	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assault Hub 2.0 Specs 6.2	Low Pressure (Altitude)			
Assault Hub 2.0 Specs 6.2.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to all altitudes from sea level to 4572 meters.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 500.6, Procedure II or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assault Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.	

Assault Hub 2.0 Specs 6.3	High Temperature – Operation				
Assault Hub 2.0 Specs 6.3.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to all high temperature environments associated with the A3, A2 and A1 (+49°C max) climatic regions as described in MIL-STD-810H.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:		
			<p>a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 501.7, Procedure II, or an equivalent Method and Procedure of MIL-STD-810G; and</p> <p>b) Test Results determined the following for the Assault Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and <p>no malfunction or degradation of performance.</p>		
Assault Hub 2.0 Specs 6.4	High Temperature – Storage				

Assaulter Hub 2.0 Specs 6.4.1	Assaulter Hub 2.0 must be stored without incurring one or more defects during and after being exposed to all high temperature environments associated with the A3, A2, and A1 climatic regions as described in MIL-STD-810H.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assaulter Hub 2.0 was tested IAW MIL-STD-810H, Method 501.7, Procedure I or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.	
Assaulter Hub 2.0 Specs 6.5	Low Temperature - Operation			
Assaulter Hub 2.0 Specs 6.5.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to all low	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:	

	temperature environments associated with a C0 and C1 (-30°C min) climatic region as described in MIL-STD-810. For this requirement, the lower boundary of the C1 climatic region will be evaluated at -30°C.		<p>a) Assaulter Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 502.7, Procedure I or an equivalent Method and Procedure of MIL-STD-810G; and</p> <p>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. 	
Assaulter Hub 2.0 Specs 6.6	Low Temperature - Storage			
Assaulter Hub 2.0 Specs 6.6.1	Assaulter Hub 2.0 must be stored without incurring one or more defects during and after being exposed to all low temperature environments associated with a C0 and C1 (-30°C min) climatic region as described in MIL-STD-810.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:	
			a) Assaulter Hub 2.0 was tested IAW MIL-STD-810H, Method 502.7,	

	For this requirement, the lower boundary of the C1 climatic region will be evaluated at -30°C.		<p>Procedure II or an equivalent Method and Procedure of MIL-STD-810G; and</p> <p>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. 	
Assaulter Hub 2.0 Specs 6.7	Temperature Shock			
Assaulter Hub 2.0 Specs 6.7.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to conditions of rapid changes in ambient air temperature as encountered during movements between in-door environments and out-door environments at either high temperature (+49°C) and low temperature (-30°C) extremes.	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none"> a) Assaulter Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 503.7, Procedure I-C or Procedure I-D, or an equivalent 	

	For this requirement, the Assaulter Hub 2.0 did not require any physical modifications or preparations in advance.		Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.	
Assaulter Hub 2.0 Specs 6.8	Contamination by Fluids			
Assaulter Hub 2.0 Specs 6.8.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed with the fluids listed in Appendix 3 – Fluids List.	Explanation or Analysis Report	<u>Explanation:</u> This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assaulter Hub 2.0 was tested with all fluid listed in Appendix 3, and IAW MIL-STD-810H, Method 504.3, using Intermittent Contamination Procedure, or an equivalent Method and Procedure of MIL-STD-810G; and	

			<p>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none">i) no display of any change in materiel characteristics;ii) no evidence of physical damage; andiii) no malfunction or degradation of performance. <p>Or</p> <p><u>Analysis Report:</u> This technical evaluation criterion will be met if the Analysis Report demonstrates that the requirement is met.</p>	
Assaulter Hub 2.0 Specs 6.9	Solar Radiation (Sunshine)			
Assaulter Hub 2.0 Specs 6.9.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed in all high solar radiation environments associated with A1 and A2 climatic regions as described in MIL-STD-810H.	Explanation or Analysis Report	<p><u>Explanation:</u> This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none">a) Assaulter Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 505.7 Procedure I, or an equivalent Method and Procedure of MIL-STD-810G;b) A1 climatic conditions were used; andc) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:	

			<div>i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.</div> <div>Or</div> <div><u>Analysis Report:</u> This technical evaluation criterion will be met if the Analysis Report demonstrates that the requirement is met.</div>	
Assaulter Hub 2.0 Specs 6.10	Rain			
Assaulter Hub 2.0 Specs 6.10.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to conditions of rainfall exposure of a minimum 1.7 mm/min as described in MIL-STD-810H.	Explanation	<div>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</div> <div>a) Assaulter Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 506.6, Procedure I (Rain and Blowing Rain) or an equivalent Method and Procedure of MIL-STD-810G; and</div> <div>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:<div>i) no display of any change in materiel characteristics; ii) evidence of physical damage; and</div></div>	

				iii) no malfunction or degradation of performance.	
Assault Hub 2.0 Specs 6.11	Humidity				
Assault Hub 2.0 Specs 6.11.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to all high humidity environments associated with B1, B2 and B3 climatic regions as described in MIL-STD-810H.	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none"> a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 507.6, Procedure II, (Aggravated) or an equivalent Method and Procedure of MIL-STD-810G; b) Test Results determined the following for the Assault Hub 2.0 during and after the test: <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. 		

Assaulter Hub 2.0 Specs 6.12	Fungus				
Assaulter Hub 2.0 Specs 6.12.1	Assaulter Hub 2.0 must not contain materials that support fungus growth.	Explanation or Analysis Report	<p><u>Explanation:</u> This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <p>a) Assaulter Hub 2.0 was tested IAW MIL-STD-810H, Method 508.8 or an equivalent Method and Procedure of MIL-STD-810G.; and</p> <p>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no display of fungus; iii) no evidence of physical damage; and iv) no malfunction or degradation of performance. <p>Or <u>Analysis Report:</u></p>		

				This technical evaluation criterion will be met if the Analysis Report demonstrates that the requirement is met.	
Assault Hub 2.0 Specs 6.13	Salt Fog				
Assault Hub 2.0 Specs 6.13.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to a salt fog atmosphere.	Explanation or Analysis Report	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none"> a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 509.7 or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assault Hub 2.0 during and after the test: <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no display of corrosion; iii) no evidence of physical damage; and iv) no malfunction or degradation of performance. 		

Assault Hub 2.0 Specs 6.14				
Sand and Dust				
Assault Hub 2.0 Specs 6.14.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to a blowing sand and dust environment.	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <p><u>Dust:</u></p> <ul style="list-style-type: none"> a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H Method 510.7 procedure I or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assault Hub 2.0 during and after the test: <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. <p>And</p>	

				<p><u>Sand:</u></p> <p>a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H Method 510.7 procedure II or an equivalent Method and Procedure of MIL-STD-810G; and</p> <p>b) Test Results determined the following for the Assault Hub 2.0 during and after the test:</p> <ul style="list-style-type: none">i) no display of any change in materiel characteristics;ii) no evidence of physical damage; andiii) no malfunction or degradation of performance.	
--	--	--	--	--	--

Explosive Atmosphere				
Assault Hub 2.0 Specs 6.15	Assault Hub 2.0 must not be hazardous in an explosive environment	Explanation or Analysis Report	Explanation: This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 511.7 Procedure I or an equivalent Method and Procedure of MIL-STD-810G; b) All devices were disconnected and reconnected to the Assault Hub 2.0 during the test; and c) Test Results determined the following for the Assault Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) Assault hub 2.0 does not cause ignition in a fuel-air explosive atmosphere; iii) no evidence of physical damage; and iv) no malfunction or degradation of performance. Or Analysis Report: This technical evaluation criterion will be met if the Analysis Report demonstrates that the requirement is met.	
Assault Hub 2.0 Specs 6.16	Water Immersion			

Assault Hub 2.0 Specs 6.16.1	During and after a water immersion of one (1) meter depth for a minimum of 30 minutes, the Assault Hub 2.0 must: a) not allow water or moisture ingress; and b) operate without incurring one or more defects.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assault Hub 2.0 was tested in an operational state, and IAW MIL-STD-810H, Method 512.6 Procedure I (Immersion) or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assault Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.	
Assault Hub 2.0 Specs 6.17	Vibration			
Assault Hub 2.0 Specs 6.17.1	Assault Hub 2.0 must operate without incurring one or more defects after and	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:	

	during being exposed to vibrations of military ground vehicles.		<p>a) Assaulter Hub 2.0 tested IAW any of the following Procedures of Method 514.8 in MIL-STD-810H:</p> <ul style="list-style-type: none"> a. Procedure I, with any of the following vibration profiles: <ul style="list-style-type: none"> i) Category 4 - Two-wheeled Trailer; or ii) Category 24 - General Minimum Integrity, vibration profile identified in Figure 514.8E-1. b. Procedure II, using a vibration profile described in Category 5 - Truck/trailer; <p>b) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. <p>Equivalent Methods and Procedures of MIL-STD-810G are also accepted.</p>	
Assault Hub 2.0 Specs 6.18	Functional Shock			
Assault Hub 2.0 Specs 6.18.1	Assault Hub 2.0 must operate without incurring one or more defects during and after being exposed to shocks associated with dismounted soldier operations.	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none"> a) Assaulter Hub 2.0 tested in an operational state, and IAW MIL-STD- 	

				810H, Method 516.8 Procedure I (Functional Shock) or an equivalent Method and Procedure of MIL-STD-810G; and b) Test Results determined the following for the Assault Hub 2.0 during and after the test: i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.	
Assault Hub 2.0 Specs 6.19	Transit Drop				
Assault Hub 2.0 Specs 6.19.1	Assault Hub 2.0 must operate without incurring one or more defects during and after experiencing 1.22m drops.	Explanation	This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assault Hub 2.0 was tested IAW MIL-STD-810H, Method 516.8 Procedure IV (Transit Drop) or an		

				<p>equivalent Method and Procedure of MIL-STD-810G;</p> <p>b) Assaulter Hub 2.0 unpacked and in a non-operational state with no device connected;</p> <p>c) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <p>i) no display of any change in materiel characteristics;</p> <p>ii) no evidence of physical damage; and</p> <p>iii) no malfunction or degradation of performance.</p>	
Assaulter Hub 2.0 Specs 6.20	Electric field, radiated susceptibility				
Assaulter Hub 2.0 Specs 6.20.1	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to an electrical field of 50V/m at frequencies of 2MHz to 18GHz.	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <p>a) Test IAW MIL-STD-461G, test RS103 or an equivalent Method and Procedure of MIL-STD-461F;</p> <p>b) Assaulter Hub 2.0 tested in an operational state:</p>		

				<p>c) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none">i) no display of any change in materiel characteristics;ii) no evidence of physical damage; andiii) no malfunction or degradation of performance.	
Assaulter Hub 2.0 Specs 6.21	Emission Control (EMCON)				
Assaulter Hub 2.0 Specs 6.21.1	Assaulter Hub 2.0 must meet the EMCON requirement from section 5.14 of MIL-STD-464C. Frequencies tested are outside of 225-450MHz frequency range	Explanation	<p>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder:</p> <ul style="list-style-type: none">a) Test IAW MIL-STD-461G, test RE102 or an equivalent Method and Procedure of MIL-STD-461F;b) Assaulter Hub 2.0 tested in an operational state;c) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:		

				<div>i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance.</div>	
Assaulter Hub 2.0 Specs 6.22	Electrostatic Discharge				
Assaulter Hub 2.0 Specs 6.22.2	Assaulter Hub 2.0 must operate without incurring one or more defects during and after being exposed to electrostatic discharges.	Test Report	<div>This technical evaluation criterion will be met if the Explanation contains the following Confirmations from the Bidder: a) Assaulter Hub 2.0 was tested in an operational state, and IAW any of the following Military Standards: i) MIL STD 1686C, 5.2.2.2, Direct Contact, Operating Equipment, 4000V Hand/Metal HBM test; ii) MIL-STD-461G, test CS118, using a Level 3 Discharge or higher; iii) MIL-STD-464C, section 5.8.4 Electrical and electronic subsystems;</div>		

				<p>b) Assaulter Hub 2.0 tested in an operational state;</p> <p>c) Test Results determined the following for the Assaulter Hub 2.0 during and after the test:</p> <ul style="list-style-type: none"> i) no display of any change in materiel characteristics; ii) no evidence of physical damage; and iii) no malfunction or degradation of performance. 	
Assaulter Hub 2.0 Specs 7.0	HEALTH AND SAFETY				
Assaulter Hub 2.0 Specs 7.1	General				
Assaulter Hub 2.0 Specs 7.1.1	Assaulter Hub 2.0 must not present environmental, health or system safety hazards of a Catastrophic or Critical mishap severity.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 7.1.2	Assaulter Hub 2.0 must not present a Catastrophic or Critical hazard to the operator and surrounding environment even when so damaged that it allows the ingress of water, egress of internal substances, or foreign material.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Specs 7.2	Mechanical Safety				
Assaulter Hub 2.0 Specs 7.2.1	Assaulter Hub 2.0 must bear no raw, sharp, or rough edges on any parts.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.		

Thermal Contact Hazard														
Assaulter Hub 2.0 Specs 7.3														
Assaulter Hub 2.0 Specs 7.3.1	The maximum allowable surface contact temperatures for the Assaulter Hub 2.0 must be in accordance with MIL-STD-1472G section 5.7.6.9 Thermal contact hazards.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.											
PHYSICAL REQUIREMENTS														
Assaulter Hub 2.0 Cables & Accessories Specs 1.0														
Assaulter Hub 2.0 Cables & Accessories Specs 1.1														
Assaulter Hub 2.0 Cables & Accessories Specs 1.1.1	Length of Assaulter Hub 2.0 Non-proprietary cables must not exceed the values below:	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.											
<table><tr><th>Cable Name</th><th>Length (mm)</th></tr><tr><td>Battery cable</td><td>1500</td></tr><tr><td>Harris AN/PRC 163 Radio cable (black data)</td><td>1500</td></tr><tr><td>Harris AN/PRC 163 Radio cable (red data)</td><td>1500</td></tr><tr><td>Harris AN/PRC 163 Radio cable (black and red data)</td><td>1500</td></tr></table>		Cable Name	Length (mm)	Battery cable	1500	Harris AN/PRC 163 Radio cable (black data)	1500	Harris AN/PRC 163 Radio cable (red data)	1500	Harris AN/PRC 163 Radio cable (black and red data)	1500			
Cable Name	Length (mm)													
Battery cable	1500													
Harris AN/PRC 163 Radio cable (black data)	1500													
Harris AN/PRC 163 Radio cable (red data)	1500													
Harris AN/PRC 163 Radio cable (black and red data)	1500													

	Harris RF-7800S Radio cable	1500			
	USB type A receptacle cable	1500			
Assaulter Hub 2.0 Cables & Accessories Specs 1.2	Finish and Color				
Assaulter Hub 2.0 Cables & Accessories Specs 1.2.1	All Assaulter Hub 2.0 cables must have the same finish and color as the Assaulter Hub 2.0.		Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Cables & Accessories Specs 2.0	INTERFACE REQUIREMENTS				
Assaulter Hub 2.0 Cables & Accessories Specs 2.1	Connectors				
Assaulter Hub 2.0 Cables & Accessories Specs 2.1.1	All cable connectors: a) must mate with Assaulter Hub 2.0 connectors on one end; and b) must mate with the device connector(s) on the other end(s).		Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.	

Assaulter Hub 2.0 Cables Specs 3.0	FUNCTIONAL REQUIREMENTS				
Assaulter Hub 2.0 Cables & Accessories Specs 3.1	Power Distribution and Management				
Assaulter Hub 2.0 Cables & Accessories Specs 3.1.1	All Assaulter Hub 2.0 cables must provide power and data from the Hub to the device through the same cable.	Explanation	This technical evaluation criterion will be met if the Explanation demonstrates that the requirement is met.		
Assaulter Hub 2.0 Cables & Accessories Specs 4.0	ENVIRONMENT CONDITIONS				
Assaulter Hub 2.0 Cables & Accessories Specs 4.1	General				
Assaulter Hub 2.0 Cables & Accessories Specs 4.1.1	All Assaulter Hub 2.0 Cables and Accessories must meet all performance requirements in this technical requirement specification without incurring physical damage and without degradation of performance, during and after exposure to any combination of the meteorological and induced climatic conditions described in the technical requirement specification of Assaulter Hub 2.0.	Explanation	This technical evaluation criterion will be met if the Explanation confirms that the requirement is met.		

HEALTH AND SAFETY				
Assaulter Hub 2.0 Cables & Accessories Specs 5.0				
Assaulter Hub 2.0 Cables & Accessories Specs 5.1	General			
Assaulter Hub 2.0 Cables & Accessories Specs 5.1.1	All Assaulter Hub 2.0 Cables and Accessories must not present environmental, health or system safety hazards of a Catastrophic or Critical mishap severity.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Cables & Accessories Specs 5.1.2	All Assaulter Hub 2.0 Cables and Accessories must not present a Catastrophic or Critical hazard to the operator and surrounding environment even when so damaged that it allows the ingress of water, egress of internal substances, or foreign material.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Cables & Accessories Specs 5.2	Mechanical Safety			
Assaulter Hub 2.0 Cables & Accessories Specs 5.2.1	All Assaulter Hub 2.0 Cables and Accessories must bear no raw, sharp, or rough edges on any parts.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.	
Assaulter Hub 2.0 Cables & Accessories Specs 5.3	Thermal Contact Hazard			

Assaulter Hub 2.0 Cables & Accessories Specs 5.3.1	The maximum allowable surface contact temperatures for all Assaulter Hub 2.0 Cables and Accessories must be in accordance with MIL-STD-1472G section 5.7.6.9 Thermal contact hazards.	Analysis Report or Explanation	This technical evaluation criterion will be met if the Analysis Report or the Explanation demonstrates that the requirement is met.	
---	---	--------------------------------------	--	--

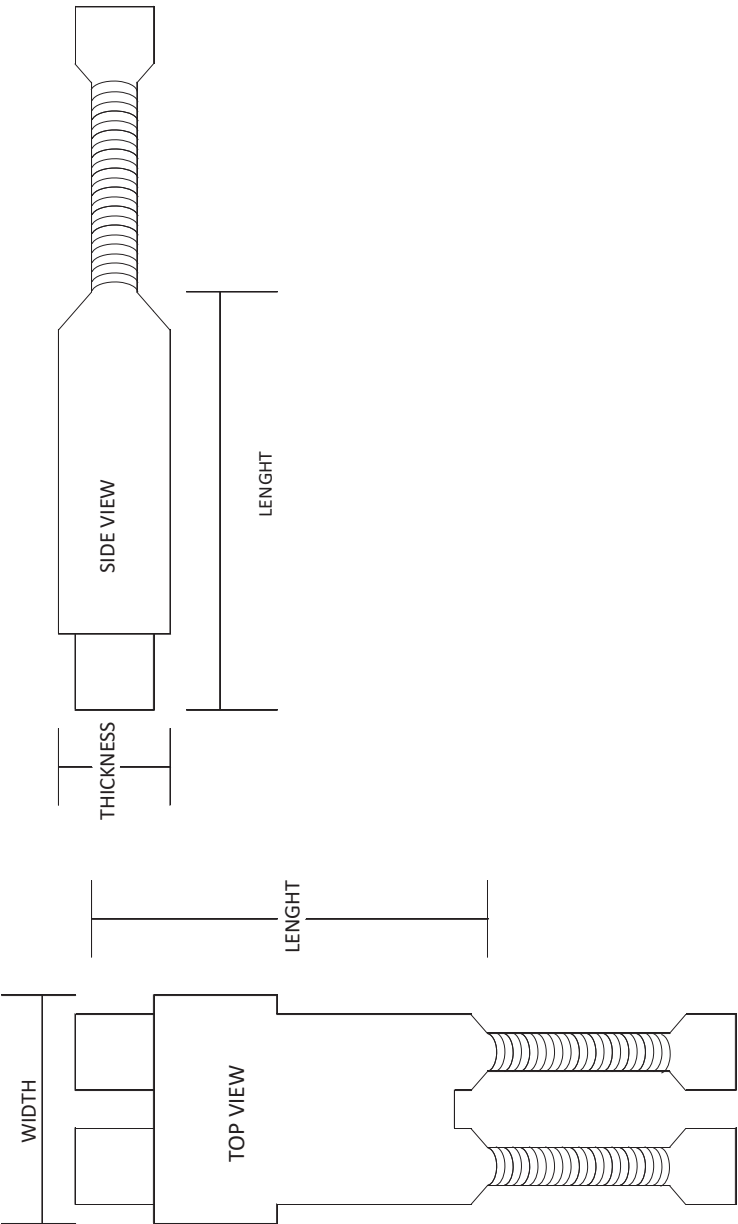


Figure 1: Hub Dimensions - Example

ANNEX B, BASIS OF PAYMENT-TO BE COMPLETED BY BIDDER (Taxes and Customs Duties excluded in all Tables)					
Table 1	FIRM REQUIREMENTS (Table 1 to be completed by Bidder)		Qty	Unit Price	Extended Price
	Firm Requirements				
	1	Assault Hub 2.0	450	\$	-
	2	Battery Cable	450	\$	-
	3	Harris AN/PRC-163 Radio Cable (black data) *See 9.1.2	450	\$	-
	4	Harris AN/PRC-163 Radio Cable (red data) *See 9.1.2	450	\$	-
	5	Harris AN/PRC-163 Radio Cable (black and red data)	450	\$	-
	6	Harris AN/PRC-163 Radio Power Adaptor	450	\$	-
	7	Harris RF-780DS Radio Cable	450	\$	-
	8	Harris RF-780DS Radio Power Adaptor	450	\$	-
	9	USB type A receptacle Cable	450	\$	-
	10	MOLLE Clip for Assault Hub 2.0	450	\$	-
All blocks must be filled out for Total evaluated price			Total Extended Price	\$	-

Table 2	OPTIONAL REQUIREMENTS (Table 2 to be completed by Bidder)			Pricing if exercised before first option year	Extended Price first option year	Pricing if exercised before Second Option year	Extended Price second option year
			Qty (up to)*				
	Note: Optional Requirements are not firm orders. Canada may or may not exercise one or all items within this table. The Optional Requirements do not in any way constitute a commitment on behalf of Canada. Canada may exercise the quantities at any time throughout the exercised Optional years						
	1	Assault Hub 2.0	2250	\$	-	\$	-
	2	Battery Cable	2250	\$	-	\$	-
	3	Harris AN/PRC-163 Radio Cable (black data) *See 9.1.2	2250	\$	-	\$	-
	4	Harris AN/PRC-163 Radio Cable (red data) *See 9.1.2	2250	\$	-	\$	-
	5	Harris AN/PRC-163 Radio Cable (black and red data)	2250	\$	-	\$	-
	6	Harris AN/PRC-163 Radio Power Adaptor	2250	\$	-	\$	-
	7	Harris RF-780DS Radio Cable	2250	\$	-	\$	-
	8	Harris RF-780DS Radio Power Adaptor	2250	\$	-	\$	-
	9	USB Type A receptacle Cable	2250	\$	-	\$	-
10	MOLLE Clip for Assault Hub 2.0	2250	\$	-	\$	-	
All blocks must be filled out for Total evaluated price			TOTAL Extended Price	\$	-	\$	-

Table 3	Optional Spare Parts Order (Note: Bidders should provide breakdown of parts with their pricing which will be inserted after contract award)	Qty	Pricing before first option period	Pricing before second option period	Pricing 1 May 2021 - 31 Mar 2022
1	As determined by the Technical Authority after review of recommended spares parts list	TBD			
This table is not considered as part of the bid					

Table 4	Labour Category	Level of Effort (A)	Firm Hourly Rate (B)	Total
4.1*	Hour	200		
4.2*	Hourly rate per labour category			
	Project Manager	200 \$	-	\$ -
	Senior Engineer	200 \$	-	\$ -
	Intermediate Engineer	200 \$	-	\$ -
	Junior Engineer	200 \$	-	\$ -
	ILS Manager	200 \$	-	\$ -
	ILS Specialist	200 \$	-	\$ -
	Quality Assurance Manager	200 \$	-	\$ -
	Senior Draftsman	200 \$	-	\$ -
	Intermediate Draftsman	200 \$	-	\$ -
	Junior Draftsman	200 \$	-	\$ -
	Senior Technologist	200 \$	-	\$ -
	Intermediate Technologist	200 \$	-	\$ -
	Junior Technologist	200 \$	-	\$ -
	Senior Technician	200 \$	-	\$ -
	Intermediate Technician	200 \$	-	\$ -
	Junior Technician	200 \$	-	\$ -
	Administrative Assistant	200 \$	-	\$ -
4.3*	Section 4.0 Total			\$ -
4.1* Number of hours (200) used for bid price evaluation only, this does not constitute an obligation of work on behalf of Canada.				
4.2* Enter the Firm Hourly Rate (B) for each labour category. Multiply the Level of Effort (A) X Firm Hourly Rate (B).				
4.3* Summation of all totals of section 4.2				

Additional Work Requirements: Where the satisfactory performance of approved Additional Work Requirements, in accordance with the Resultant Contract Articles of Agreement 6, entails the provision of materials, the Contractor shall be paid actual costs plus a firm material mark-up rate, in percentage, including all overhead and profit, as listed in Table 5.0 below.

Table 5.0	Material Mark-up	
5.1*	Material Cost	\$150,000.00
5.2*	Material Mark-up Rate	0%
5.3*	Mark-up Total \$	\$ -
5.4*	Section 5.0 Total	\$ -
5.1* Material Cost used for bid price comparison only.		
5.2* Enter the Material Mark-up Rate Percentage.		
5.3* Calculate the Mark-up Total (section 5.1 X [1 + section 5.2]).		
5.4* Summation of all items of section 5.3		

Additional Work Requirements: Where the satisfactory performance of approved Additional Work Requirements, in accordance with the Resultant Contract Articles of Agreement 6, entails the provision of subcontracting, the Contractor shall be paid actual costs plus a firm subcontracting mark-up rate, in percentage, including all overhead and profit, as listed in Table 6.0 below.

Table 6.0	Sub contractor Mark-up	
6.1*	Material / Service Cost	\$150,000.00
6.2*	Material / Service Mark-up Rate	0%
6.3*	Mark-up Total \$	\$ -
6.4*	Section 6.0 Total	\$ -
6.1* Material / Service Cost used for bid price comparison only.		
6.2* Enter the Material / Service Mark-up Rate Percentage.		
6.3* Calculate the Mark-up Total (section 6.1 X [1 + section 6.2])		
6.4* Summation of all item of section 6.3		

Travel and Living Expenses: Where the satisfactory performance of approved Additional Work Requests entails Travel and Living Expenses, the Contractor will be reimbursed for these expenses reasonably and properly incurred in the performance of the Work. The reimbursement will be at cost without allowances for profit and/or administrative overhead. The reimbursement will be in accordance with the Treasury Board Travel Directive or the Contractor's internal policies, whichever is less. The applicable items in the Treasury Board Travel Directive are:

- a) The provisions in the directive referring to "Travelers", rather than those referring to "employees"; and
b) The meal, private vehicle and incidental expenses provided in Appendices B, C, and D.

Total Evaluated Financial Bid price	
Total Table 1 (Equals Total Extended Price)	\$ -
Total Table 2 (Sum of total Extended Price)	\$ -
Total Table 4	\$ -
Total Table 5	\$ -
Total Table 6	\$ -
Total Evaluated Financial Bid price	\$ -

TASK AUTHORIZATION
AUTORISATION DES TÂCHES

All invoices/progress claims must show the reference Contract and Task numbers. Toutes les factures doivent indiquer les numéros du contrat et de la tâche.		Amendment no. – N° de la modification Increase/Decrease – Augmentation/Réduction		To – A TO THE CONTRACTOR You are requested to supply the following services in accordance with the terms of the above reference contract. Only services included in the contract shall be supplied against this task. Please advise the undersigned if the completion date cannot be met. Invoices/progress claims shall be prepared in accordance with the instructions set out in the contract. Vous êtes prié de fournir les services suivants en conformité des termes du contrat mentionné ci-dessus. Seuls les services mentionnés dans le contrat doivent être fournis à l'appui de cette demande. Prière d'aviser le signataire si la livraison ne peut se faire dans les délais prescrits. Les factures doivent être établies selon les instructions énoncées dans le contrat.		Delivery location – Expédiez à Delivery/Completion date – Date de livraison/d'achèvement		Date for the Department of National Defence pour le ministère de la Défense nationale		
Contract no. – N° du contrat	Task no. – N° de la tâche	Previous value – Valeur précédente								

[illegible]

APPLICABLE ONLY TO PWGSC CONTRACTS: The Contract Authority signature is required when the total value of the DND 626 exceeds the threshold specified in the contract.

NE S'APPLIQUE QU'AUX CONTRATS DE TPSCG : La signature de l'autorité contractante est requise lorsque la valeur totale du formulaire DND 626 est supérieure au seuil précisé dans le contrat.

for the Department of Public Works and Government Services
pour le ministère des Travaux publics et services gouvernementaux