



TENDER
NOT FOR CONSTRUCTION



ASSOCIATION OF PROFESSIONAL ENGINEERS
& GEOSCIENTISTS OF SASKATCHEWAN
CERTIFICATE OF AUTHORIZATION
AECOM Canada Ltd.
NUMBER C1667
PERMISSION TO CONSULT HELD BY:
DISCIPLINE SASK. REG. No. SIGNATURE
ELECTRICAL 36101 Engr [Signature]

Key Plan

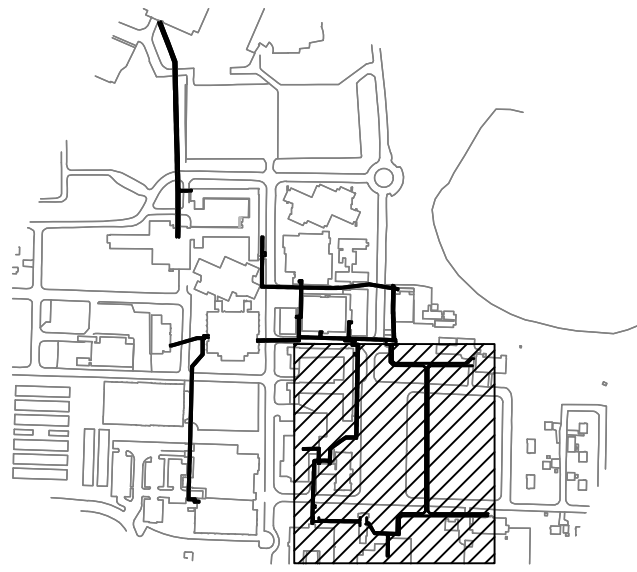

E	Issued For Tender	19/09/30
D	Not Issued	-
C	Not Issued	-
B	Not Issued	-
A	Not Issued	-
Revision	Description	Date

Client

**Public Works and
Government Services Canada**

Project title

Tunnel Revitalization

Designed by

B. Stewart

Drawn by

1. Shruti

Approved by
D. Welford


PWGSC Project Manager

J. Daymar

Drawing title

Package 1 - TBU43 - Tunnel
Electrical
Security System Detail

Project no.	Drawing no.	Revision no.
1004259	E1.39	E

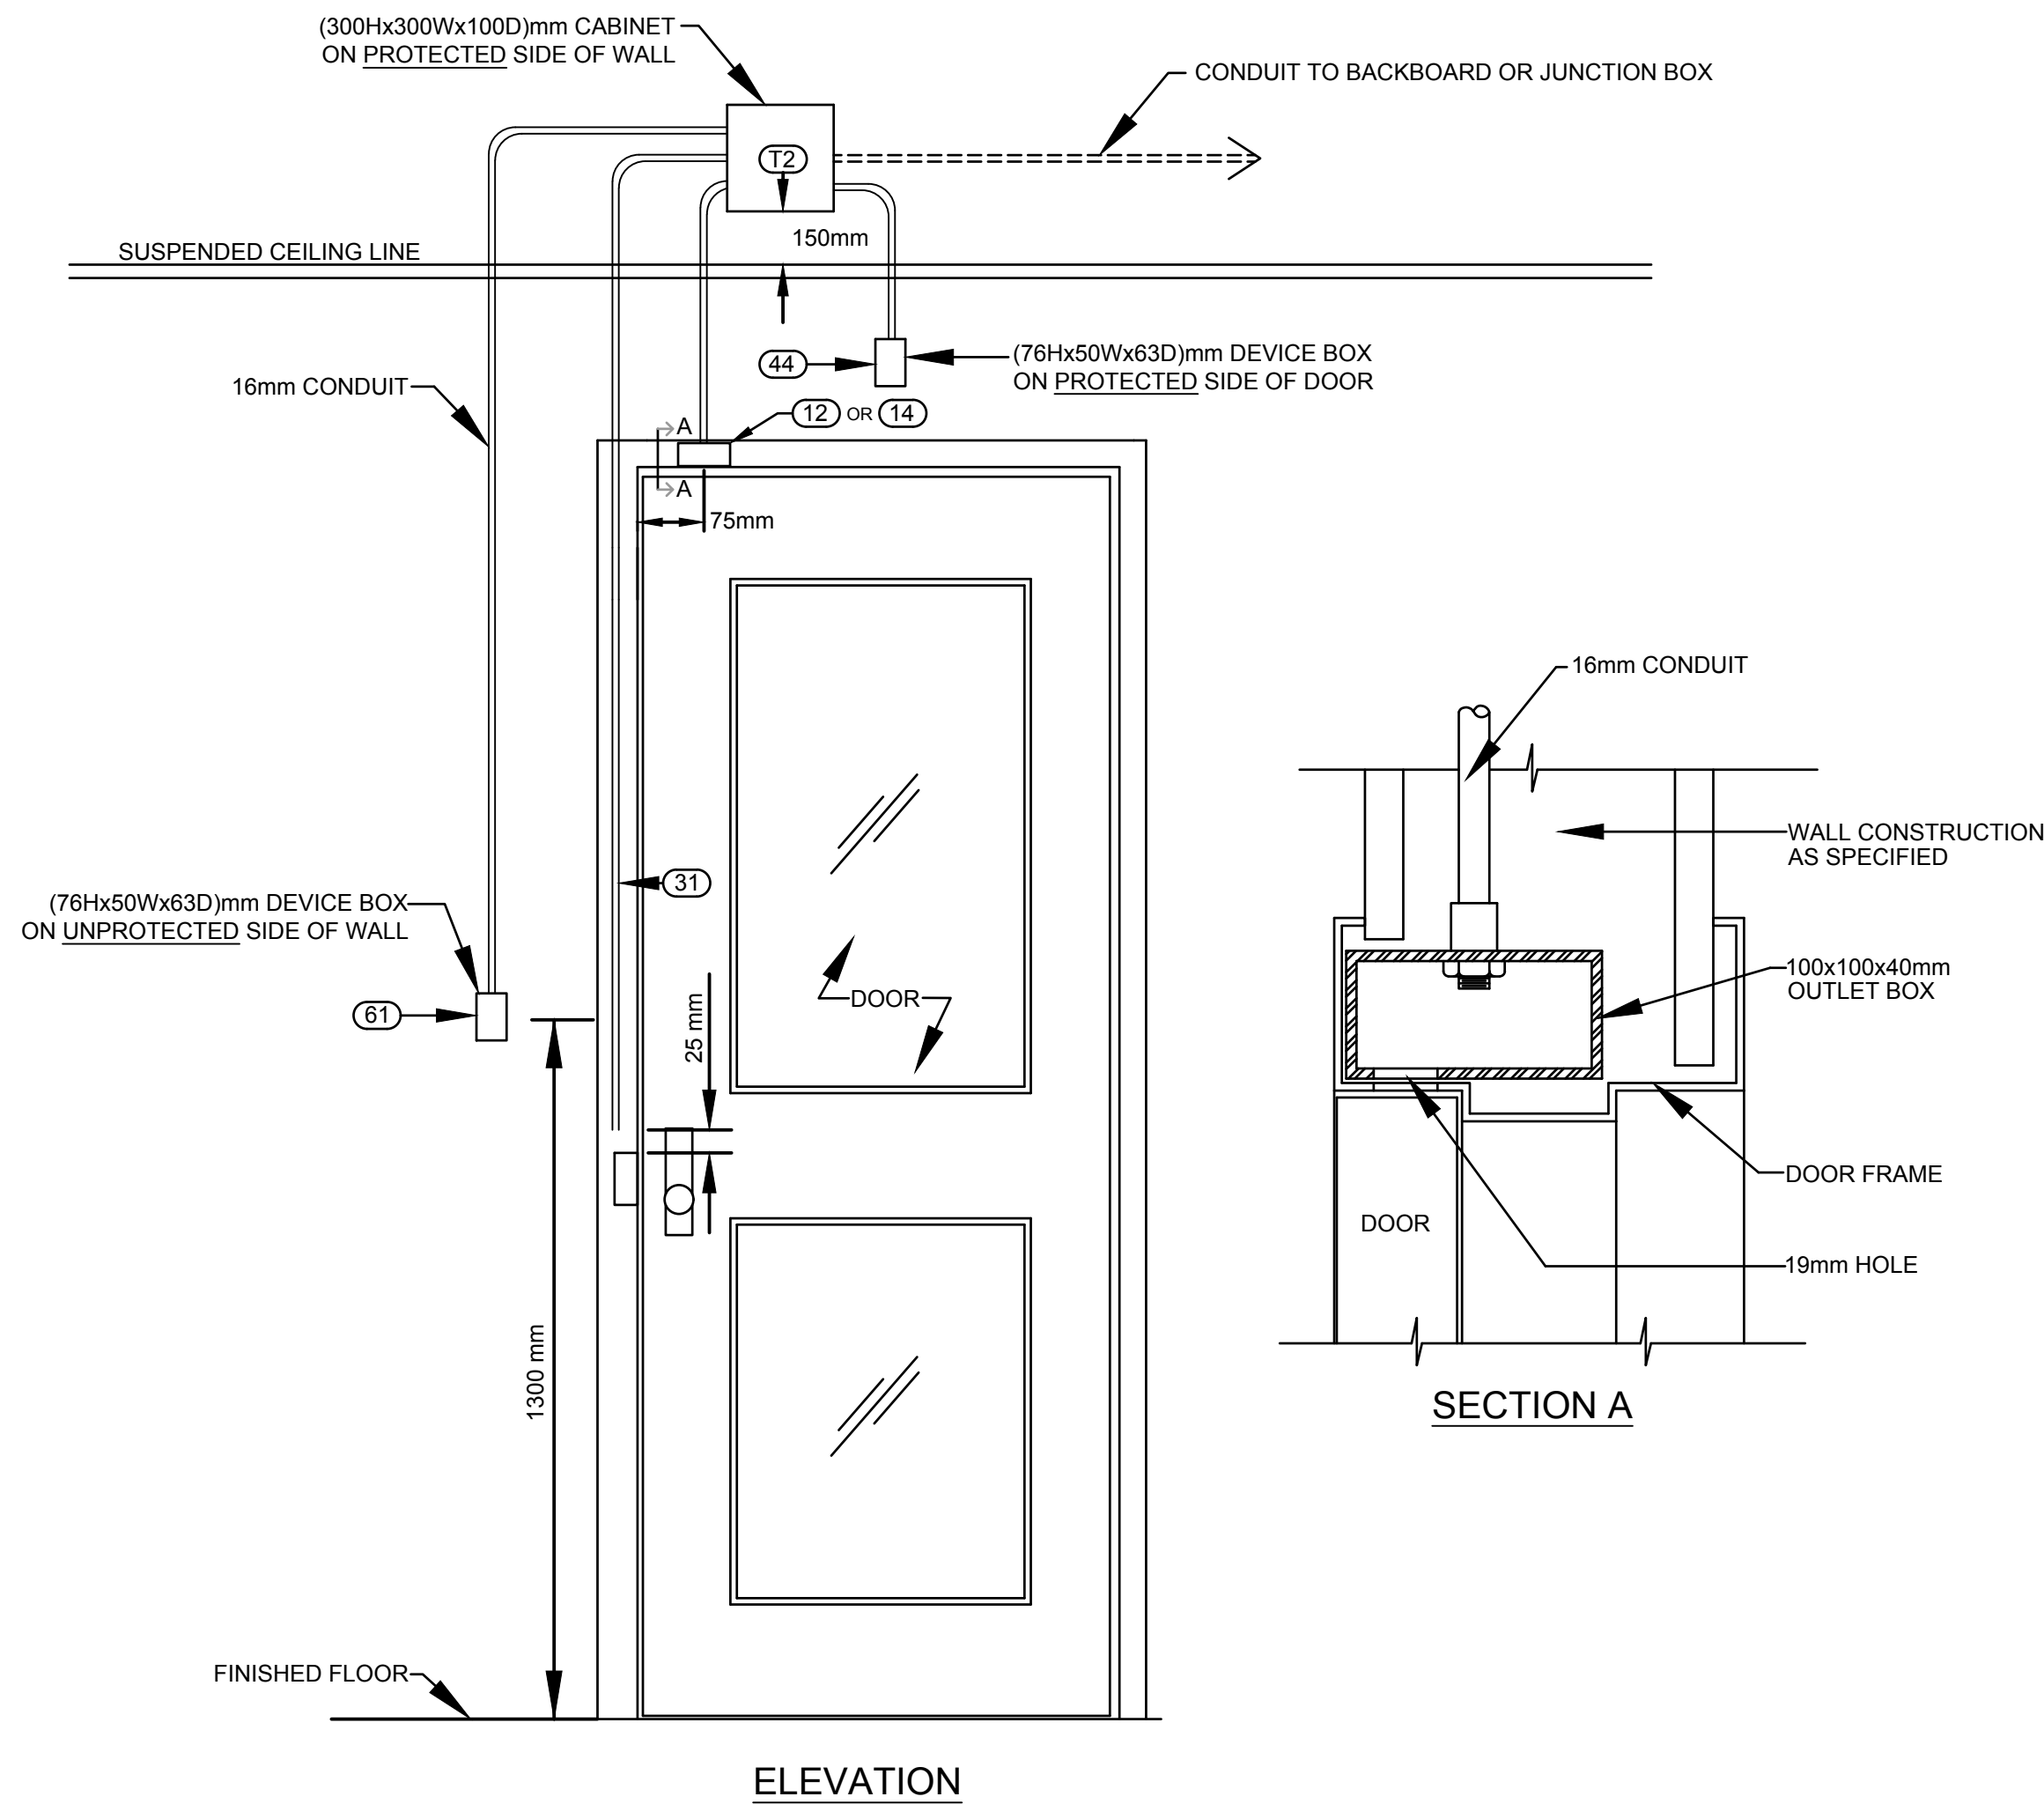

NOTES:

1. CONDUIT CONNECTOR TO BE MOUNTED AND FASTENED TO OUTLET BOX BY DOOR FRAME FABRICATOR.
2. OUTLET BOX TO BE SPOT WELDED IN PLACE BY DOOR FRAME FABRICATOR.
3. DRILL A 19mm HOLE AT 75mm (CENTER POINT) FROM THE EDGE OF THE DOOR CASING TO ALLOW FOR DOOR SWITCH INSTALLATION AND ACCESS TO WIRING.

1	ACCESS CONTROL - ELEVATION OF SINGLE DOOR (ELECTRIC STRIKE) WITH DOOR CONTACT, WALL MOUNTED READER AND ELECTRIC STRIKE
---	--

