


The following changes to the tender documents are effective immediately and will form part of the contract documents:

Enquiries received during the Solicitation Period:

1. Question: Please confirm the finish on the embedded steel shown on drawing C06. The specification seems to indicate that they should be galvanized but please confirm.

Response: Galvanized.

2. Question: With respect to Section E on C07, please confirm what type of steel the PL12 seal sill bar is. Typically we've seen these as Stainless Steel.

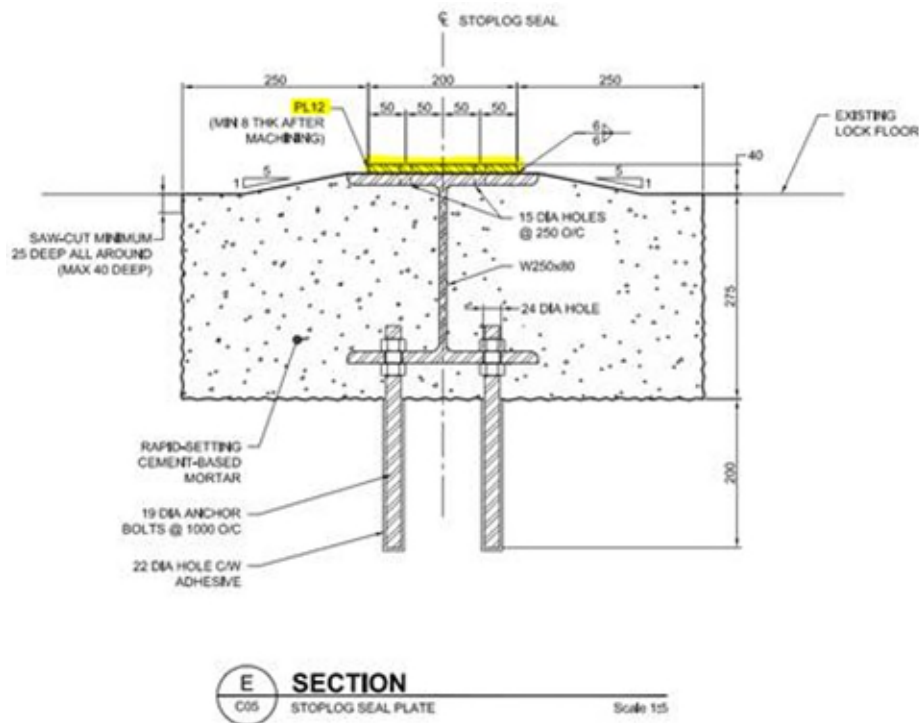

Response: With respect to Section E on C07 C06, Refer to Section 2.01.1.1 "Steel sections and plates: in accordance with CSA-G40.20 and CSA-G40.21, Grade 350W"

3. Question: Please confirm the finish requirements of the T-Wrench. Painted? Galvanized? Black?

Response: Galvanized.

4. Question: Are there drawings available for the Rack Arm identified in the Division 35 Spec (3.01)?

Question: Where are the drawing/details of the upper left rack arm?

Response: There are no drawings available for the Rack Arm. St. Andrew's Lock and Dam operations staff have a spare Rack Arm that can be used to measure and develop shop drawings from to fabricate the new Rack Arm.

5. Question: Can we use an A516-70N & IT, CVNL 30/20 Ft. Lbs @ -40 Deg. F plate to replace all the WT materials?

Response: Please provide the specified WT plate for the lifting lugs.

END OF ADDENDUM NO. 1