



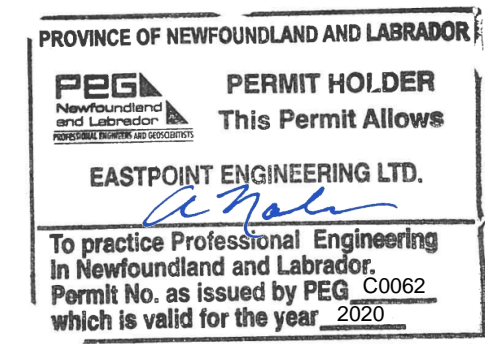

KEYPLAN  
N15

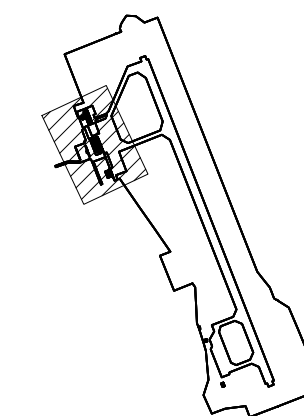

0	RE-ISSUED FOR TENDER	SEP 24 2020
revisions		date

project  
**AIRPORT PERIMETER FENCE AND ROAD REHABILITATION ATB GATE B WABUSH, NL**  
project

drawing  
**GATE ENCLOSURE ELEVATIONS (GATE B)**  
dessin

designed G. FRASER conçu

drawn A. CHOW dessiné

date

approved A. NOBLE approuvé

date 2019.02.01

Tender Soumission

PWGS Project Manager Administrateur de projets TPSGC





project number no. du projet

**R.063636.001**

drawing no. no. du dessin

**S02**

E-DRM/CDD-E: 552981

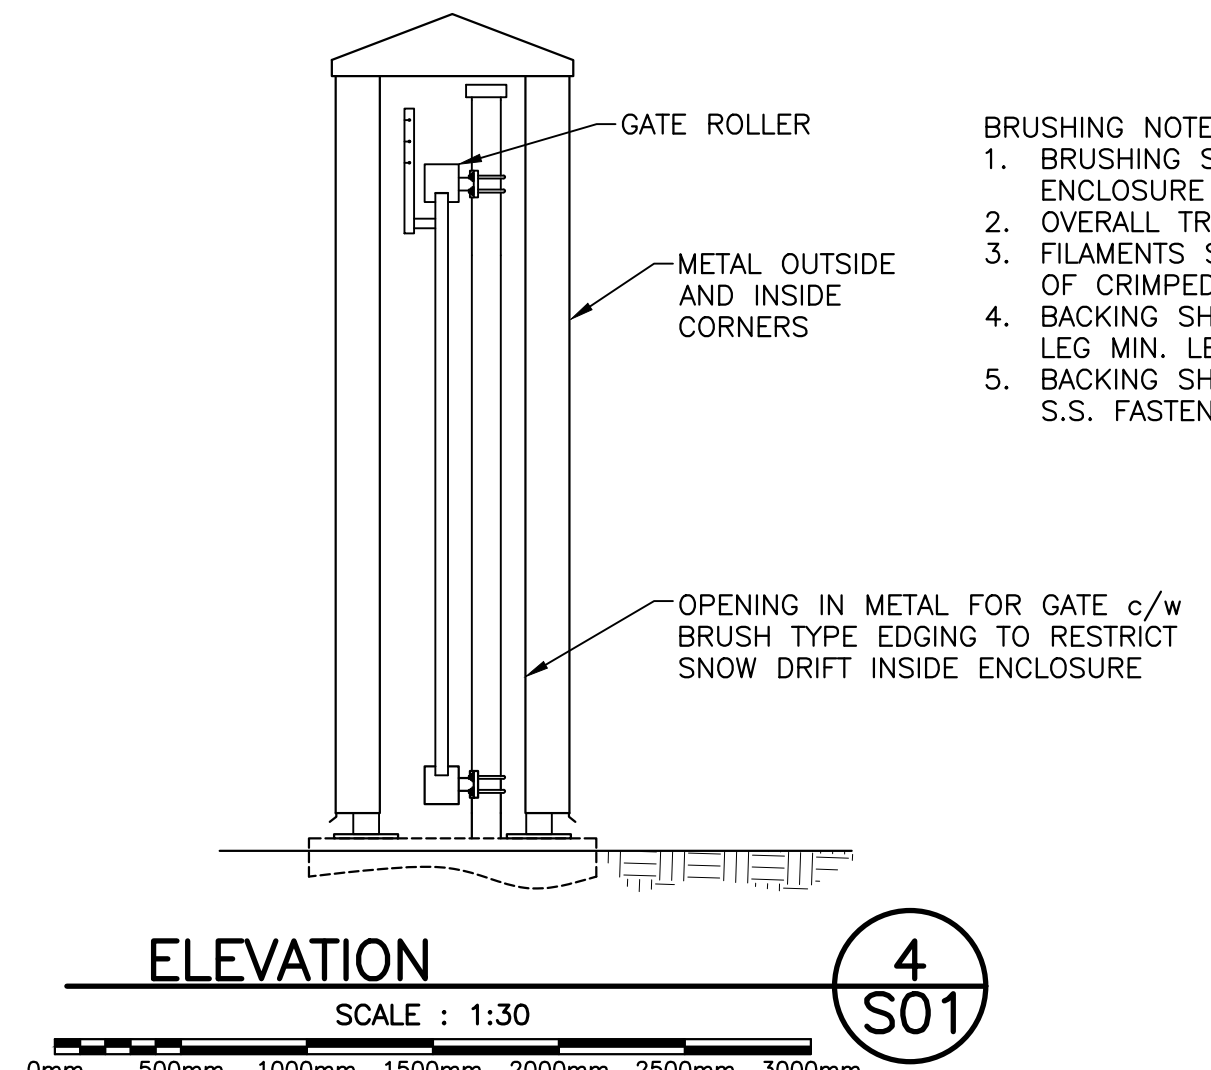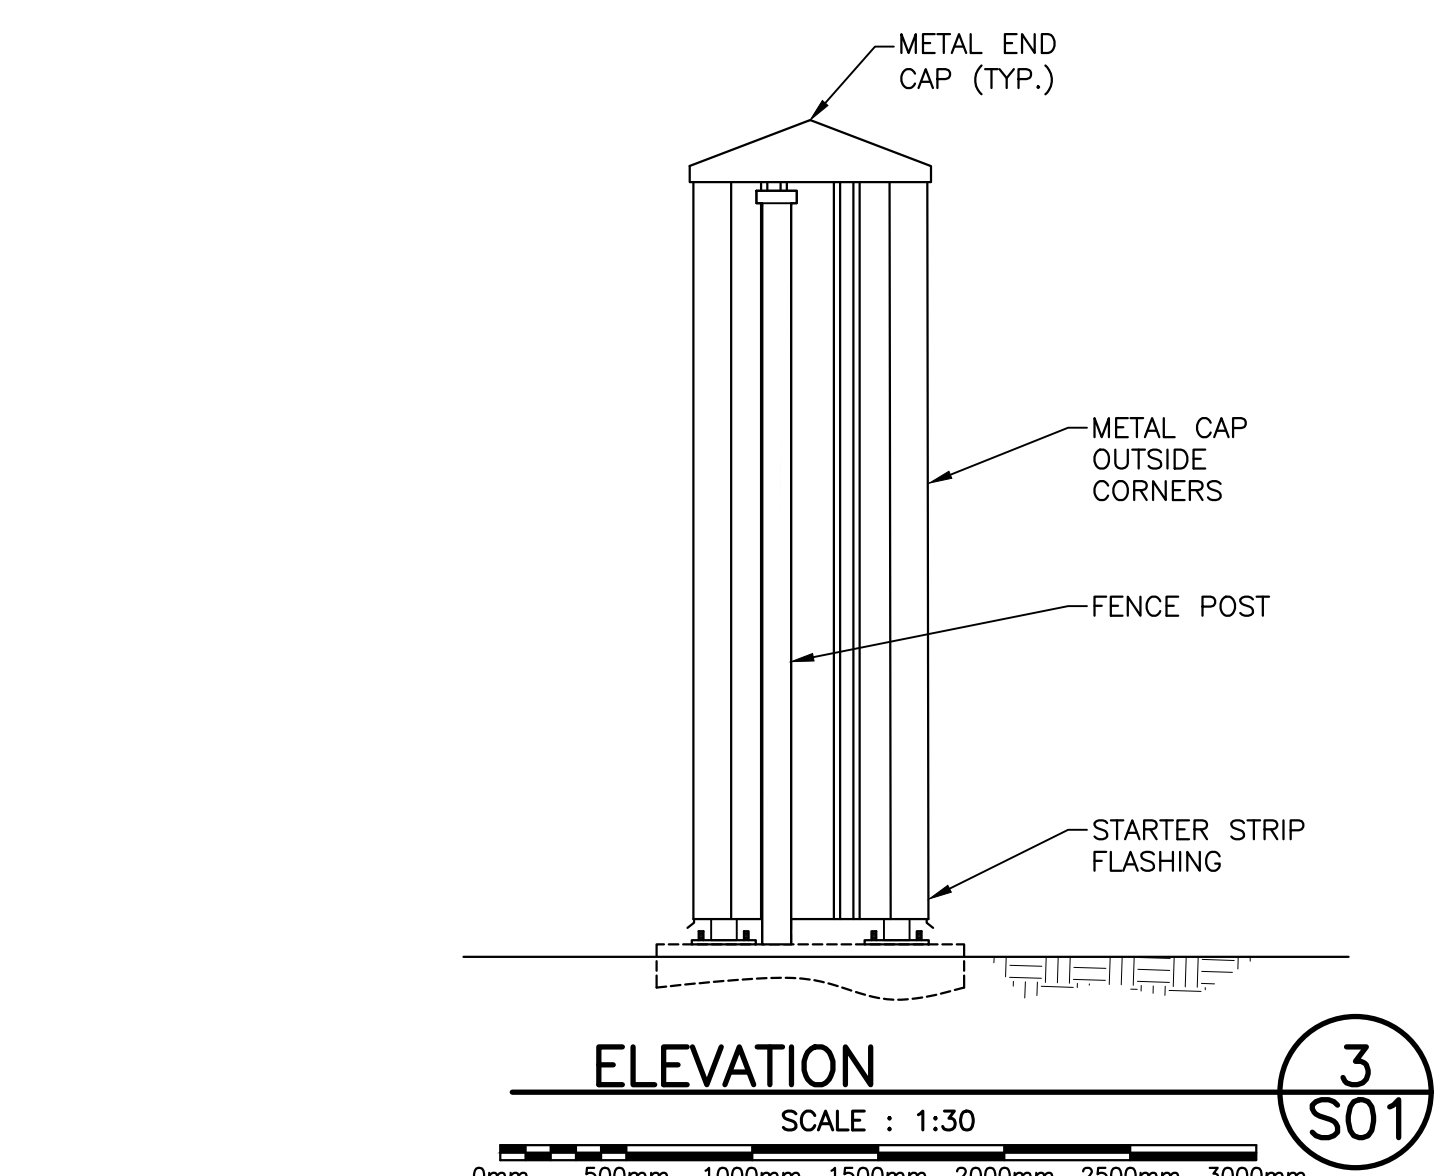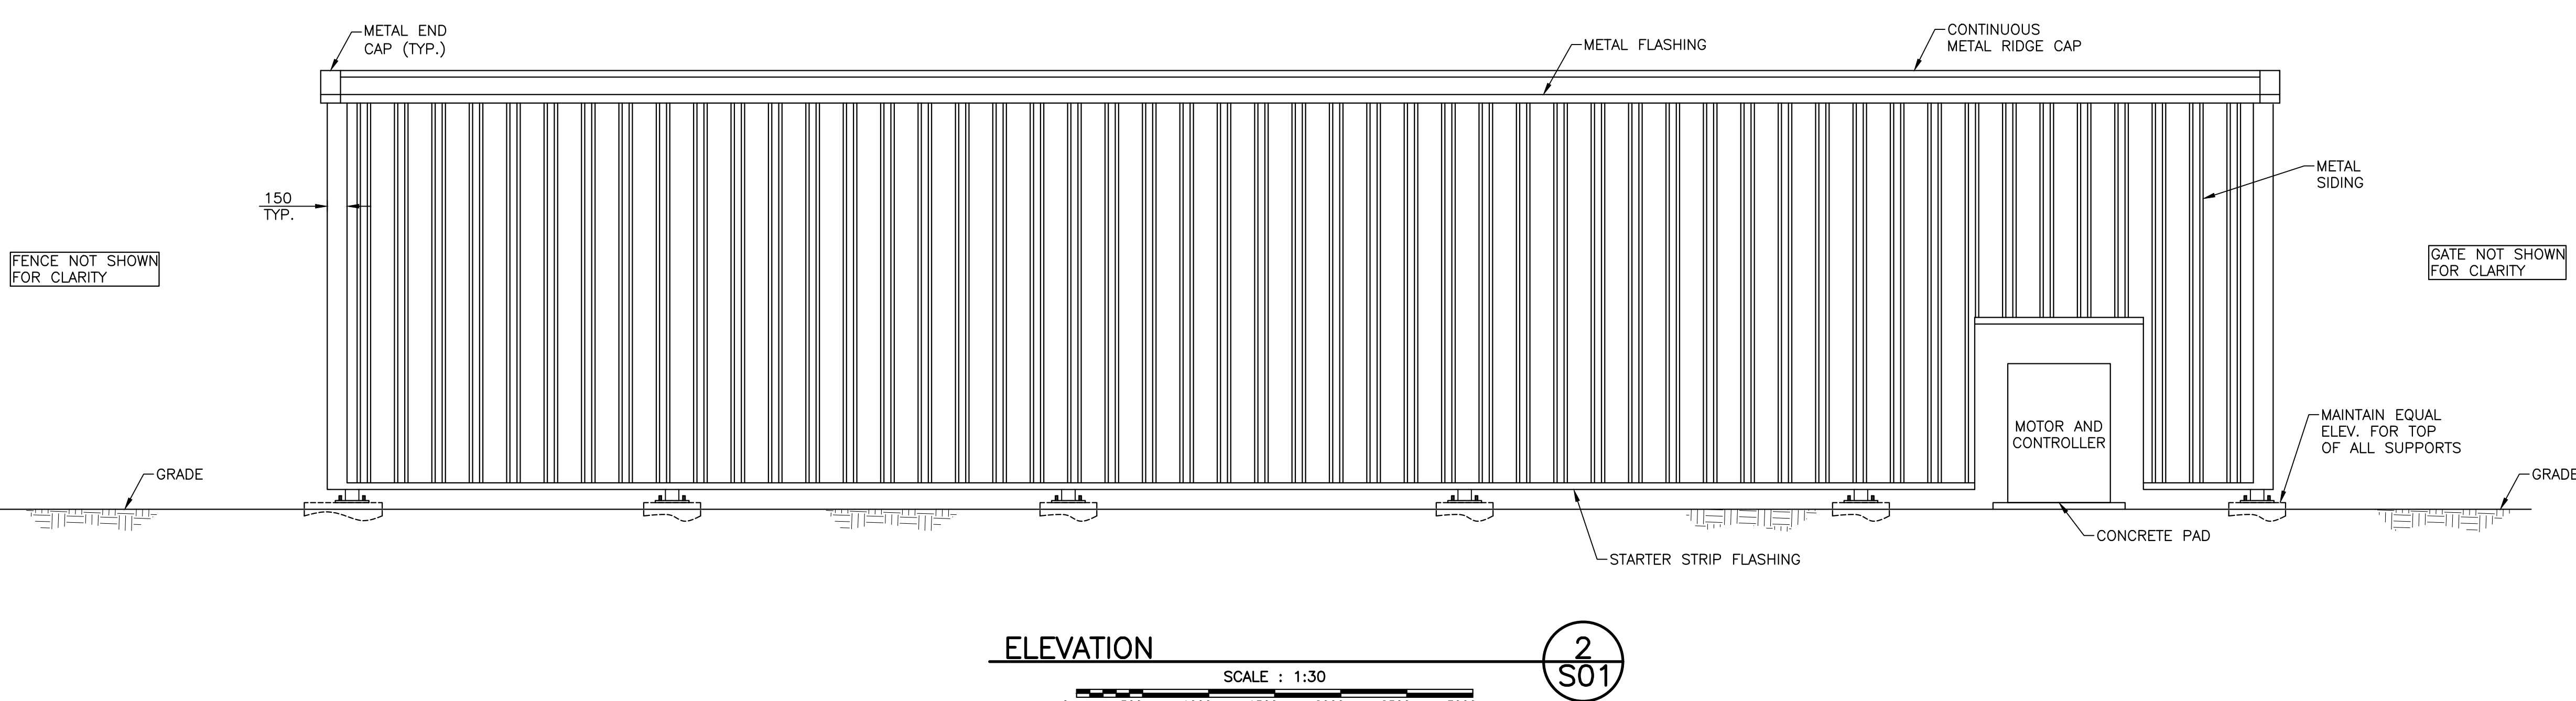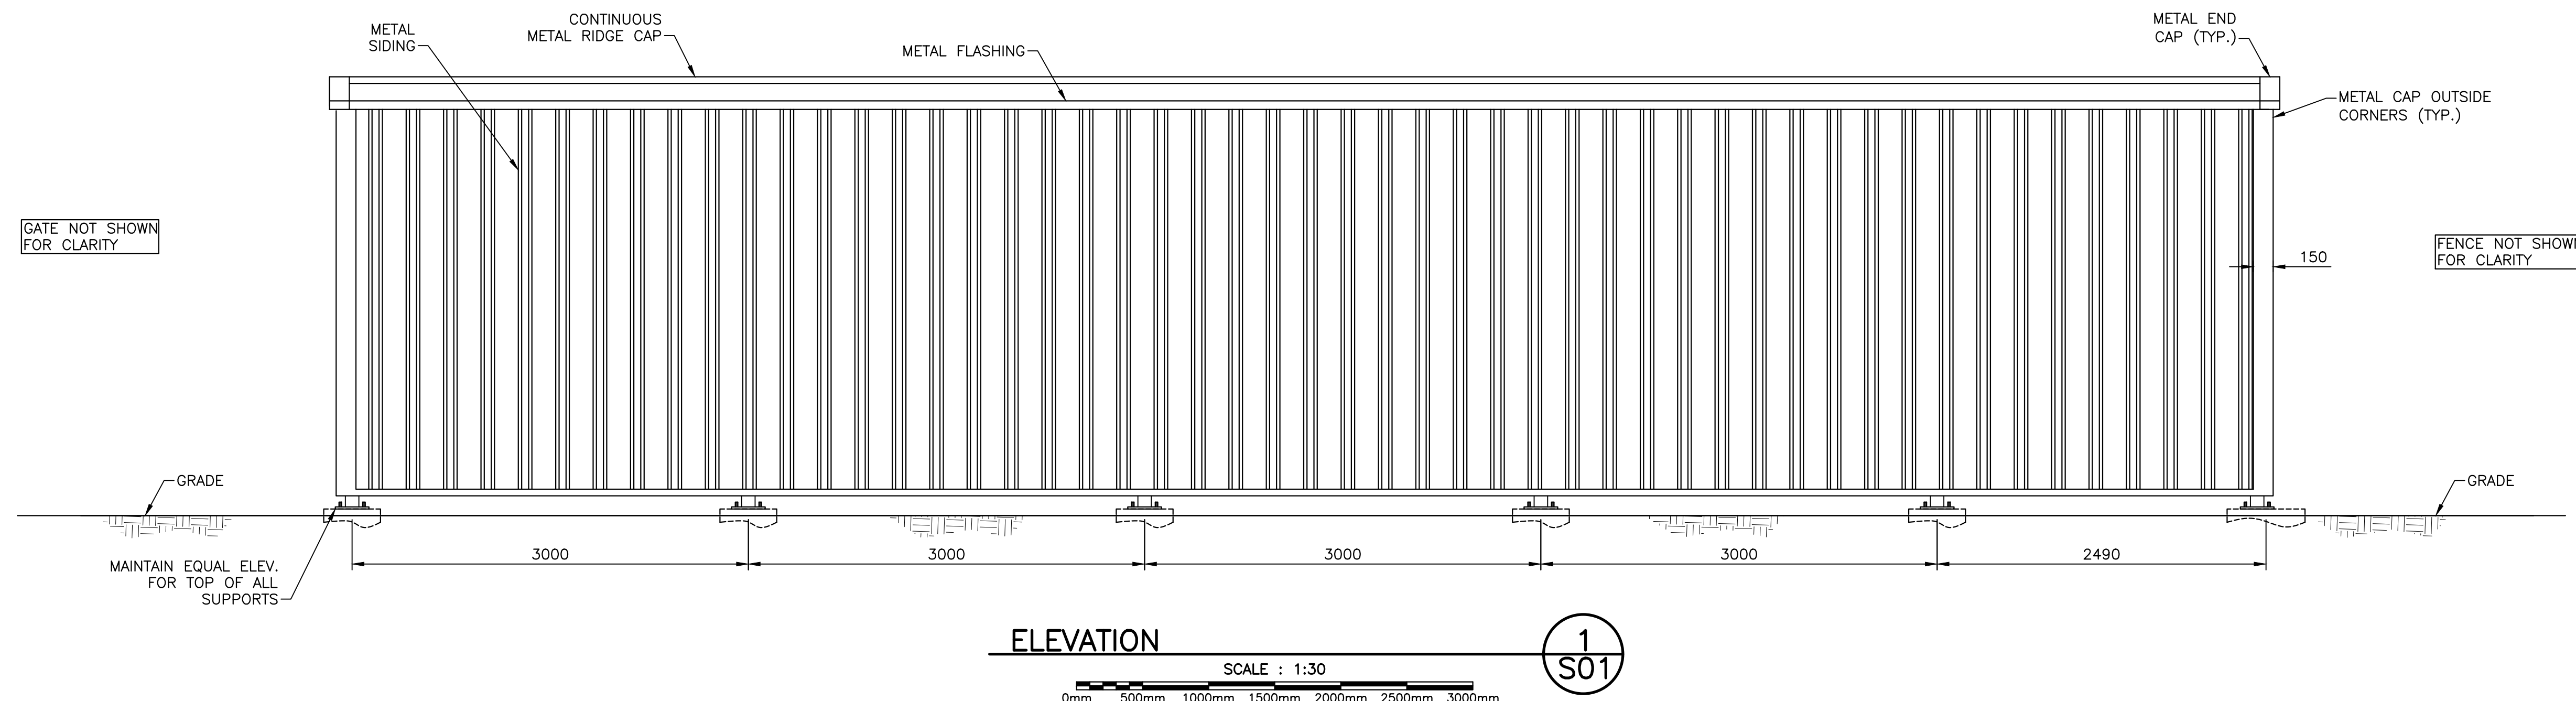

- BRUSHING NOTES:
1. BRUSHING SHALL RUN THE FULL HEIGHT OF THE ENCLOSURE ON EACH SIDE OF THE GATE.
  2. OVERALL TRIM SHALL BE A MINIMUM OF 250mm LONG.
  3. FILAMENTS SHALL BE DOUBLE ROLL TYPE, CONSTRUCTED OF CRIMPED BLACK NYLON WITH A FLAT TOP EDGE.
  4. BACKING SHALL BE GALVANIZED STEEL WITH A BASE AND LEG MIN. LENGTH OF 15mm.
  5. BACKING SHALL BE ANCHORED TO THE ENCLOSURE USING S.S. FASTENERS.