



- |            |                                |
|------------|--------------------------------|
| <b>(A)</b> | TERMINAL POST AND CAP          |
| <b>(B)</b> | RAIL END CONNECTION            |
| <b>(C)</b> | STRETCHER BAR                  |
| <b>(D)</b> | TENSION BANDS @ 450 SPACING    |
| <b>(E)</b> | BOTTOM WIRE                    |
| <b>(F)</b> | LINE POST AND BARB ARM CAP     |
| <b>(G)</b> | 7" SLEEVE JOINING TOPRAIL      |
| <b>(H)</b> | 9GA. TIES AT 457 SPACING       |
| <b>(I)</b> | CONCRETE FOOTING<br>600 x 1300 |

Nominal Height of Fence H2:	2134mm (84")
Plus Barb wire overhang	45°
H1	2438mm (8'-0")
H3	2692mm (8'-10")
C1	2438mm (8'-0")
D1	152mm (0'-6")


Chainlink Fabric      50mm (2") x 9ga. Galvanized  
Woven Wire KT 1.2 oz.

Frame and Fittings:      Galvanized

Corner Posts:      168mm (6 <sup>5</sup>/<sub>8</sub>") Sch 40  
Line Posts:      60mm (2 <sup>3</sup>/<sub>8</sub>") Sch 40  
Toprail:      43mm (1 <sup>11</sup>/<sub>16</sub>") Sch 40

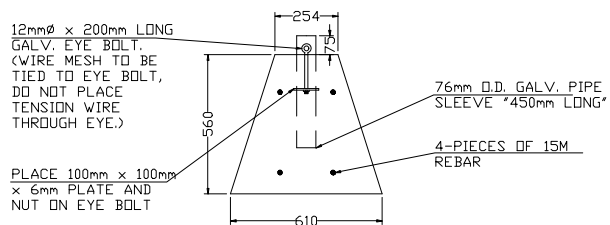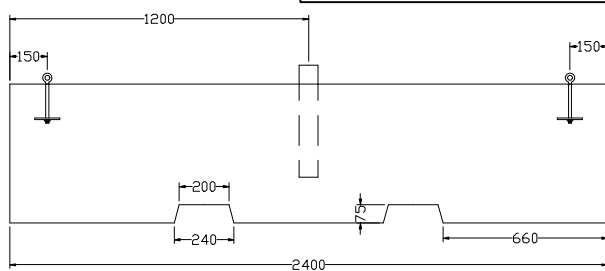

TITLE:  
TEMPORARY  
CHAINLINK FENCE

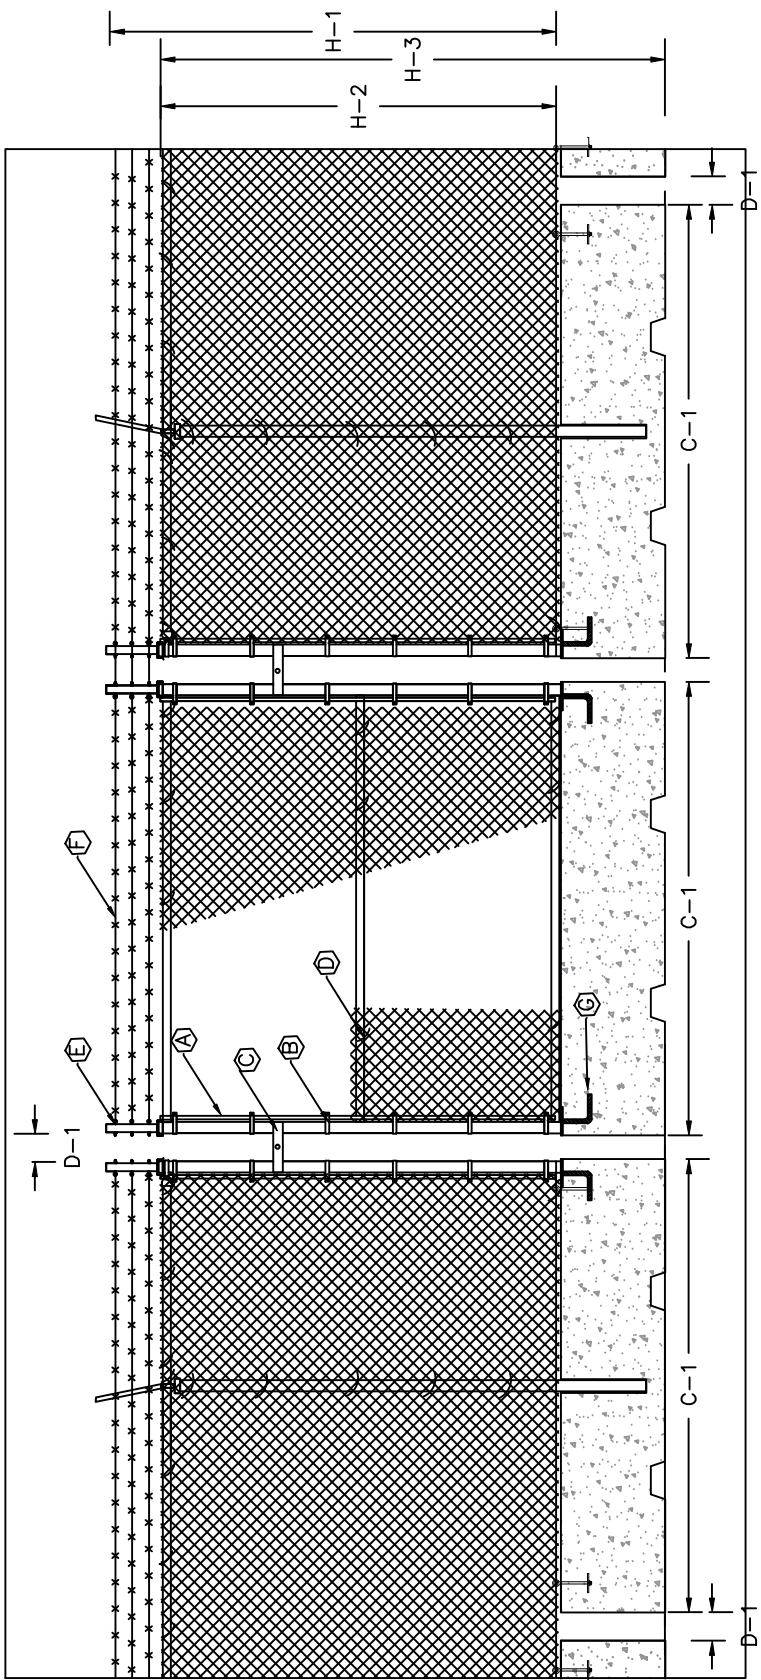

Nominal Height of Fence H2:	2134mm (84")
Plus Barb wire overhang	45"
H1	2438mm (8'-0")
H3	2692mm (8'-10")
C1	2438mm (8'-0")
D1	152mm (0'-6")
Chainlink Fabric	50mm (2") x 9ga. Galvanized Woven Wire KT 1.2 oz.
Frame and Fittings:	Galvanized
Uprights:	60mm ( 2 3/8") Sch 40
Horizontal Braces	43mm ( 1 1/8") welded to uprights

- (A) STRETCHER BAR
- (B) TENSION BANDS @ 450 SPACING
- (C) CLAMP
- (D) 9GA. TIES AT 457 SPACING
- (E) EYE BOLT
- (F) BARBWIRE
- (G) 6x6 3/4" REBAR WELDED TO PLATE SET IN CONCRETE FORM

	TITLE:
	TEMPORARY CHAINLINK REMOVEABLE SECTIONS