



**RETURN BIDS TO:**  
**RETOURNER LES SOUMISSIONS À:**  
PWGSC/TPSGC Acquisitions Bid Receiving  
Box/Boîte de Réception des Soumissions  
Bid Receiving Box/Boîte de Récepti  
1st Floor/1<sup>ère</sup> étage, Suite 1212  
100-1045 Main Street  
Moncton  
New Brunswick  
E1C 1H1  
Bid Fax: (506) 851-6759

**SOLICITATION AMENDMENT**  
**MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

**Comments - Commentaires**

**Vendor/Firm Name and Address**  
**Raison sociale et adresse du**  
**fournisseur/de l'entrepreneur**

**Issuing Office - Bureau de distribution**  
Acquisitions NB/PEI (Moncton Office) – Bureau  
d'acquisitions N.-B./Î.-P.-É. (Moncton)  
1045 Main Street / 1045, rue Main  
Moncton  
New Bruns  
E1C 1H1

<b>Title - Sujet</b> Picnic Tables, Fundy National Park Picnic Tables, Fundy National Park	
<b>Solicitation No. - N° de l'invitation</b> 5P132-200375/A	<b>Amendment No. - N° modif.</b> 001
<b>Client Reference No. - N° de référence du client</b> 5P132-200375	<b>Date</b> 2020-11-30
<b>GETS Reference No. - N° de référence de SEAG</b> PW-\$MCT-042-5837	
<b>File No. - N° de dossier</b> MCT-0-43067 (042)	<b>CCC No./N° CCC - FMS No./N° VME</b>
<b>Solicitation Closes - L'invitation prend fin</b> <b>at - à 02:00 PM</b> Atlantic Standard Time AST <b>on - le 2020-12-15</b> Heure Normale de l'Atlantique HNA	
<b>F.O.B. - F.A.B.</b> <b>Plant-Usine:</b> <input type="checkbox"/> <b>Destination:</b> <input checked="" type="checkbox"/> <b>Other-Autre:</b> <input type="checkbox"/>	
<b>Address Enquiries to: - Adresser toutes questions à:</b> Stockman (MCT), Sonia	<b>Buyer Id - Id de l'acheteur</b> mct042
<b>Telephone No. - N° de téléphone</b> (506) 961-7412 ( )	<b>FAX No. - N° de FAX</b> (506) 851-6759
<b>Destination - of Goods, Services, and Construction:</b> <b>Destination - des biens, services et construction:</b>	

**Instructions: See Herein**

**Instructions: Voir aux présentes**

<b>Delivery Required - Livraison exigée</b>	<b>Delivery Offered - Livraison proposée</b>
<b>Vendor/Firm Name and Address</b> <b>Raison sociale et adresse du fournisseur/de l'entrepreneur</b>	
<b>Telephone No. - N° de téléphone</b> <b>Facsimile No. - N° de télécopieur</b>	
<b>Name and title of person authorized to sign on behalf of Vendor/Firm</b> <b>(type or print)</b> <b>Nom et titre de la personne autorisée à signer au nom du fournisseur/</b> <b>de l'entrepreneur (taper ou écrire en caractères d'imprimerie)</b>	
<b>Signature</b>	<b>Date</b>

## Solicitation Amendment

### Picnic Tables, Fundy National Park

Solicitation Amendment No. **001**

This solicitation is hereby amended to:

(1) Answer the following questions:

Q1. Reference: 4.3 Lumber Planks used for table top and seats must be 2" thick.

*Is that a full 2" or is it 2" dressed, that would result in an actual measurement of 1"5/8*

A1. **2 inches dressed is acceptable**

Q2. Can a photo or a specification sheet be provided of the best-suited picnic table design determined by Fundy National Park by piloting multiple versions over the past several years?

A2. **This statement of requirement reflects the best suited specification. The frame set-up preferred matches the dimension image provided, however if an alternate frame set-up meets all requirements it would still be acceptable.**

Q3. Annex 'A' – clause 4.2, e) states the width of the seat is to be 9". Our design uses a Nominal 2" x 10" seat plank which has an actual cross-section dimension of 9 1/4" wide by 1 1/2" thick.

Please confirm the nominal 2" x 10" planking is acceptable.

A3. **This is acceptable**

Q4. Annex 'A' – clause 4.3.2 states the planking thickness is to be 2". The industry standard for pressure-treated lumber is a nominal 2" by X measurement, which has an actual thickness of 1 1/2". Please confirm if the industry standard 1 1/2" thick planking is acceptable.

A4. **This is acceptable.**

Q5. Can you please tell me if the boards are a true 2" board or what is a called a 2" X 6" and is actually about 1 1/2" thick?

A5. **2" Dressed (1 1/2 inches, or 1 5/8 are acceptable)**

Q6. Can you also tell me if there is a preference for round galvanized tubing frames or can it be square galvanized tubing that is welded?

A6. **The requirement is for round galvanised tubing frames**

Solicitation No. - N° de l'invitation à soumissionner  
5P132-200375/A  
Client Ref. No. - N° de réf. du client  
5P132-200375

Amd. No. - N° de la modif.  
001  
File No. - N° du dossier  
MCT-0-43067

Buyer ID - Id de l'acheteur  
mct042  
CCC No./N° CCC - FMS No./N° VME

---

**(2) Reference: ANNEX "A" STATEMENT OF REQUIREMENT**

**DELETE : ANNEX "A" STATEMENT OF REQUIREMENT**

**INSERT: ANNEX "A" STATEMENT OF REQUIREMENT (revised November 30, 2020)**

**(3) Reference: ANNEX "C" MANDATORY TECHNICAL CRITERIA**

**DELETE : ANNEX "C" MANDATORY TECHNICAL CRITERIA**

**INSERT: ANNEX "C" MANDATORY TECHNICAL CRITERIA (revised November 30, 2020)**

If your bid has already been forwarded and you wish to revise same, this revision should be sent either in a sealed envelope and mailed to the above address or by facsimile (506) 851-6759 and reach the undersigned before the appropriate closing date. The solicitation number and the closing date are to be shown on the outside of the sealed envelope or on the facsimile transmission.

All other terms and conditions of the solicitation document remain unchanged.

All enquiries concerning this amendment are to be forwarded to:

Name: Sonia Stockman  
Telephone No: (506) 961-7412  
Facsimile No: (506) 851-6759

## **ANNEX "A" STATEMENT OF REQUIREMENT (revised November 30, 2020)**

### **1.0 Introduction**

Parks Canada, Fundy National Park (referred to as the "Park") requires galvanised steel framed picnic tables with pressure treated wooden plank tops and seats to replace the all wood picnic tables in Chignecto Campground which have reached the end of their lifecycle.

### **2.0 Background**

Fundy National Park is located next to Alma, NB. It has five campgrounds which are expected to be operating during the spring and summer seasons. A scaled back camping/outdoor experience is offered during the fall and winter. The Park has been renewing its picnic tables in its campgrounds and replacing full wooden tables with steel framed models. Three campgrounds now have completed this transition, with the two larger campgrounds remaining. Chignecto campground has 265 campsites which require replaced tables and is the focus of this procurement effort. The ideal steel frame specifications have been chosen through piloting multiple versions of steel tables over the past eight years.

### **3.0 Objective**

Parks Canada intends to procure components for 265 galvanised steel framed, pressure treated wooden topped picnic tables before 19 March 2021.


### **4.0 Mandatory Requirements**

#### **4.1 PICNIC TABLES GENERAL**

- 4.1.1 265 tables total are required, 240 Standard, 25 Accessible
- 4.1.2 The frame is to consist of all galvanised steel components
- 4.1.3 All hardware for assembly are to be galvanised steel
- 4.1.4 **The requirement is for round galvanised tubing frames**
- 4.1.5 The table top and benches are to be pressure treated wooden components
- 4.1.6 The benches must attach directly to the frame, not an additional seating attachment component or bracket
- 4.1.7 Each bench must be able to support a minimum of up to 750 lbs of seated weight without tipping the table (without the table being secured to the ground)
- 4.1.8 The tables must be delivered unassembled with all hardware for assembly included
- 4.1.9 All material must come ready for assembly and not require additional modification (i.e. drilling, cutting) for assembly.

## 4.2 DIMENSIONS

- a) The steel frame and wood components must be for a table six (6) feet long, or 72 inches.
- b) The table top height of the table must be between: 28 - 32 inches.
- c) The seat height of the table must be between: 15 – 17 inches
- d) The width of the table surface must be between 28 - 30 inches
- e) The width of the seats must be: 9 -10 inches
- f) The overall width of the table must be between 55 and 60 inches
- g) ACCESSIBILITY: A total of 25 tables must have an additional table top overhang length on one end which allows for wheel chair accessibility (approx. 96 inches long table top only)

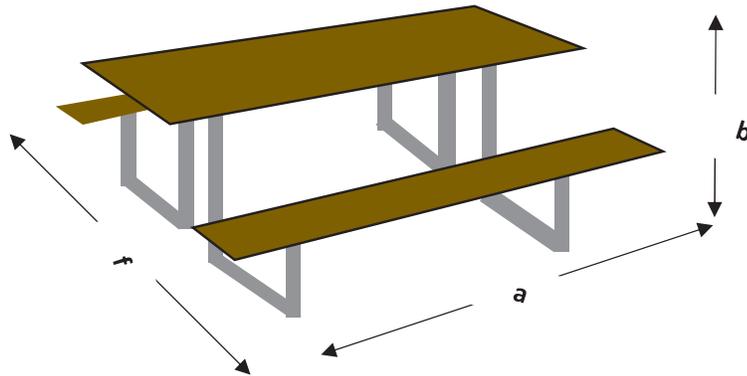

*\*the above picture is for dimensional reference only, not intended as a design*

## 4.3 LUMBER

- 4.3.1 Wood must be pressure treated to reduce impacts of long term exposure to the outdoors in all seasons
- 4.3.2 Planks used for the tables and seats must be two (2) inches thick (dressed)
- 4.3.3 All wood is to be provided ready for assembly

## 4.4 ADDITIONAL FEATURES

- A method of fixing the table in place with stakes should be included, either through the “leg” of the table or an attachment to the legs of the table. (the stakes themselves do not need to be included)
- Assembly instructions must be provided in English

#### 4.5 DELIVERY

- 4.5.1 The supplier is responsible for all freight arrangements and ensuring safe delivery of the supplied product.
- 4.5.2 Product must be delivered unassembled, packaged and palletised
- 4.5.3 Parks Canada Agency is able to offload pallets at the delivery destination using a backhoe/front end loader.

#### 4.6 COORDINATION

- 4.6.1 The Parks Canada Asset Manager will be the project authority responsible for coordinating the work requirements with the contractor
- 4.6.2 The contractor is to provide a single point of contact for the Parks Canada project authority
- 4.6.3 The items must be approved on delivery before the 19 March 2021
- 4.6.4 Updates on progress should be provided to the project authority in regards to timeline as the procurement proceeds at key milestones (i.e. units ready for shipment, # units shipped, expected final delivery date).
- 4.6.5 Work must be accepted by the Project Authority as completed as per the contract before invoice submission.

### **5.0 Submission**

Proposals should include a specification sheet and image of the proposed table, or design drawing, including an accessible version, which will meet the requirements of this statement of requirement. This information should clearly indicate it meets all requirements including the tipping limits.

Proposal should indicate the unit price, total price for the good, freight fee, and HST, and a final overall total price.

The successful proposal will meet all requirements outlined in this document and have the lowest overall total price.

**ANNEX "C" MANDATORY TECHNICAL CRITERIA (revised November 30, 2020)**

Bids MUST meet the mandatory requirements specified below. To demonstrate that all requirements of the technical specifications are respected, bidders MUST respond with complete specifications and/or descriptive literature of the equipment being offered.

**The complete specifications and/or descriptive literature should be submitted with the proposal** but may be submitted afterwards. If the complete specifications and/or descriptive literature are not submitted with the proposal, the Contracting Authority will so inform the Bidder and provide the Bidder with a time frame within which to meet this requirement. Failure to comply with the request of the Contracting Authority and meet the requirement within that time period will render the bid non-responsive.

Any proposal which fails to meet all mandatory specifications and requirements will be deemed non-responsive. Each requirement should be addressed separately.

**Technical Specifications for 5P132-200375**

Technical Specifications		Supplier's Cross Reference to Technical Offer (indicate page #)	Suppliers Comments:
1	The frame is to consist of all galvanised steel components		
2	<b>The requirement is for round galvanised tubing frames</b>		
3	All hardware for assembly are to be galvanised steel		
4	The table top and benches are to be pressure treated wooden components		
5	The benches must attach directly to the frame, <u>not</u> an additional seating attachment component or bracket		
6	Each bench must be able to support a minimum of up to 750 lbs of seated weight without tipping the table (without the table being secured to the ground)		
7	Product must be delivered unassembled, packaged and palletised (Bidders please answer yes or no to confirm)	Comply YES or NO	Answer:
8	All material must come ready for assembly and <u>not</u> require additional modification (i.e. drilling, cutting) for assembly. (Bidders please answer yes or no to confirm)	Comply YES or NO	Answer

Solicitation No. - N° de l'invitation  
5P132-200375/A  
Client Ref. No. - N° de réf. du client  
5P132-200375

Amd. No. - N° de la modif.  
File No. - N° du dossier  
MCT-0-43067

Buyer ID - Id de l'acheteur  
mct042  
CCC No./N° CCC - FMS No./N° VME

Technical Specifications		Supplier's Cross Reference to Technical Offer (indicate page #)	Suppliers Comments:
9	The steel frame and wood components must be for a table six (6) feet long, or 72 inches.		
10	The table top height of the table should be between: 28 - 32 inches.		
11	The seat height of the table should be between: 15 – 17 inches		
12	The width of the table surface should be between 28 - 30 inches		
13	The width of the seats should be: 9 -10 inches		
14	The overall width of the table should be between 55 and 60 inches		
15	ACCESSIBILITY: A total of 25 tables must have an additional table top overhang length on one end which allows for wheel chair accessibility (approx. 96 inches long table top only)		
16	Planks used for the tables and seats must be two (2) inches thick		