

TERRAPEX ENVIRONMENTAL LTD. GEOTECHNICAL REPORT IS:

UNLESS SHOWN OTHERWISE, TENSION LAP SPLICES SHALL

USING MINIMUM BEND DIAMETERS, WHILE STIRRUPS AND TIES SHALL HAVE MINIMUM HOOK DIMENSIONS. ALL HOOKS SHALL BE IN ACCORDANCE WITH THE STRUCTURAL STANDARD

- 5. THE TRUSS BRIDGE TO BE DESIGNED BY THE FABRICATOR FOR PEDESTRIAN LOAD IN ACCORDANCE WITH OBC AND/OR 3
- 6. STEEL STRUCTURE SHALL BE CORTEN STEEL GRADE 350A
- 10. THIS DRAWING TO BE READ IN CONJUNCTION WITH DRAWING

THICKNESSES FROM THE TOP OF BEARING ELEVATIONS. IF THE ACTUAL BEARING THICKNESSES ARE DIFFERENT FROM THOSE GIVEN WITH THE BEARING DESIGN DATA, THE CONTRACTOR SHALL ADJUST THE REINFORCING STEEL TO

05/10/2022 ISSUED FOR ADDENDUM # 5 | HA | M 04/07/2022 ISSUED FOR REVISIONS 03/11/2022 ISSUED FOR TENDER NO DATE REVISION/ISSUED BY APPD Landscape Architecture 582 Lancaster Street West

LEGEND

PROJECT TITLE:

TWYN RIVERS DUA AND TRAILS

Parks Parcs Canada Canada

Kitchener, ON N2K 1M3

t. 519-743-8777

www.wsp.com

SITE ADDRESS:

CLIENT:

TWYN RIVERS BRIDGES MARKHAM, ON

DRAWING TITLE:

GENERAL ARRANGEMENT **BRIDGE-1**


STAMP

AS SHOWN DATE JANUARY 2022 DWG. NUMBER

201-12190

STAMP

S-001

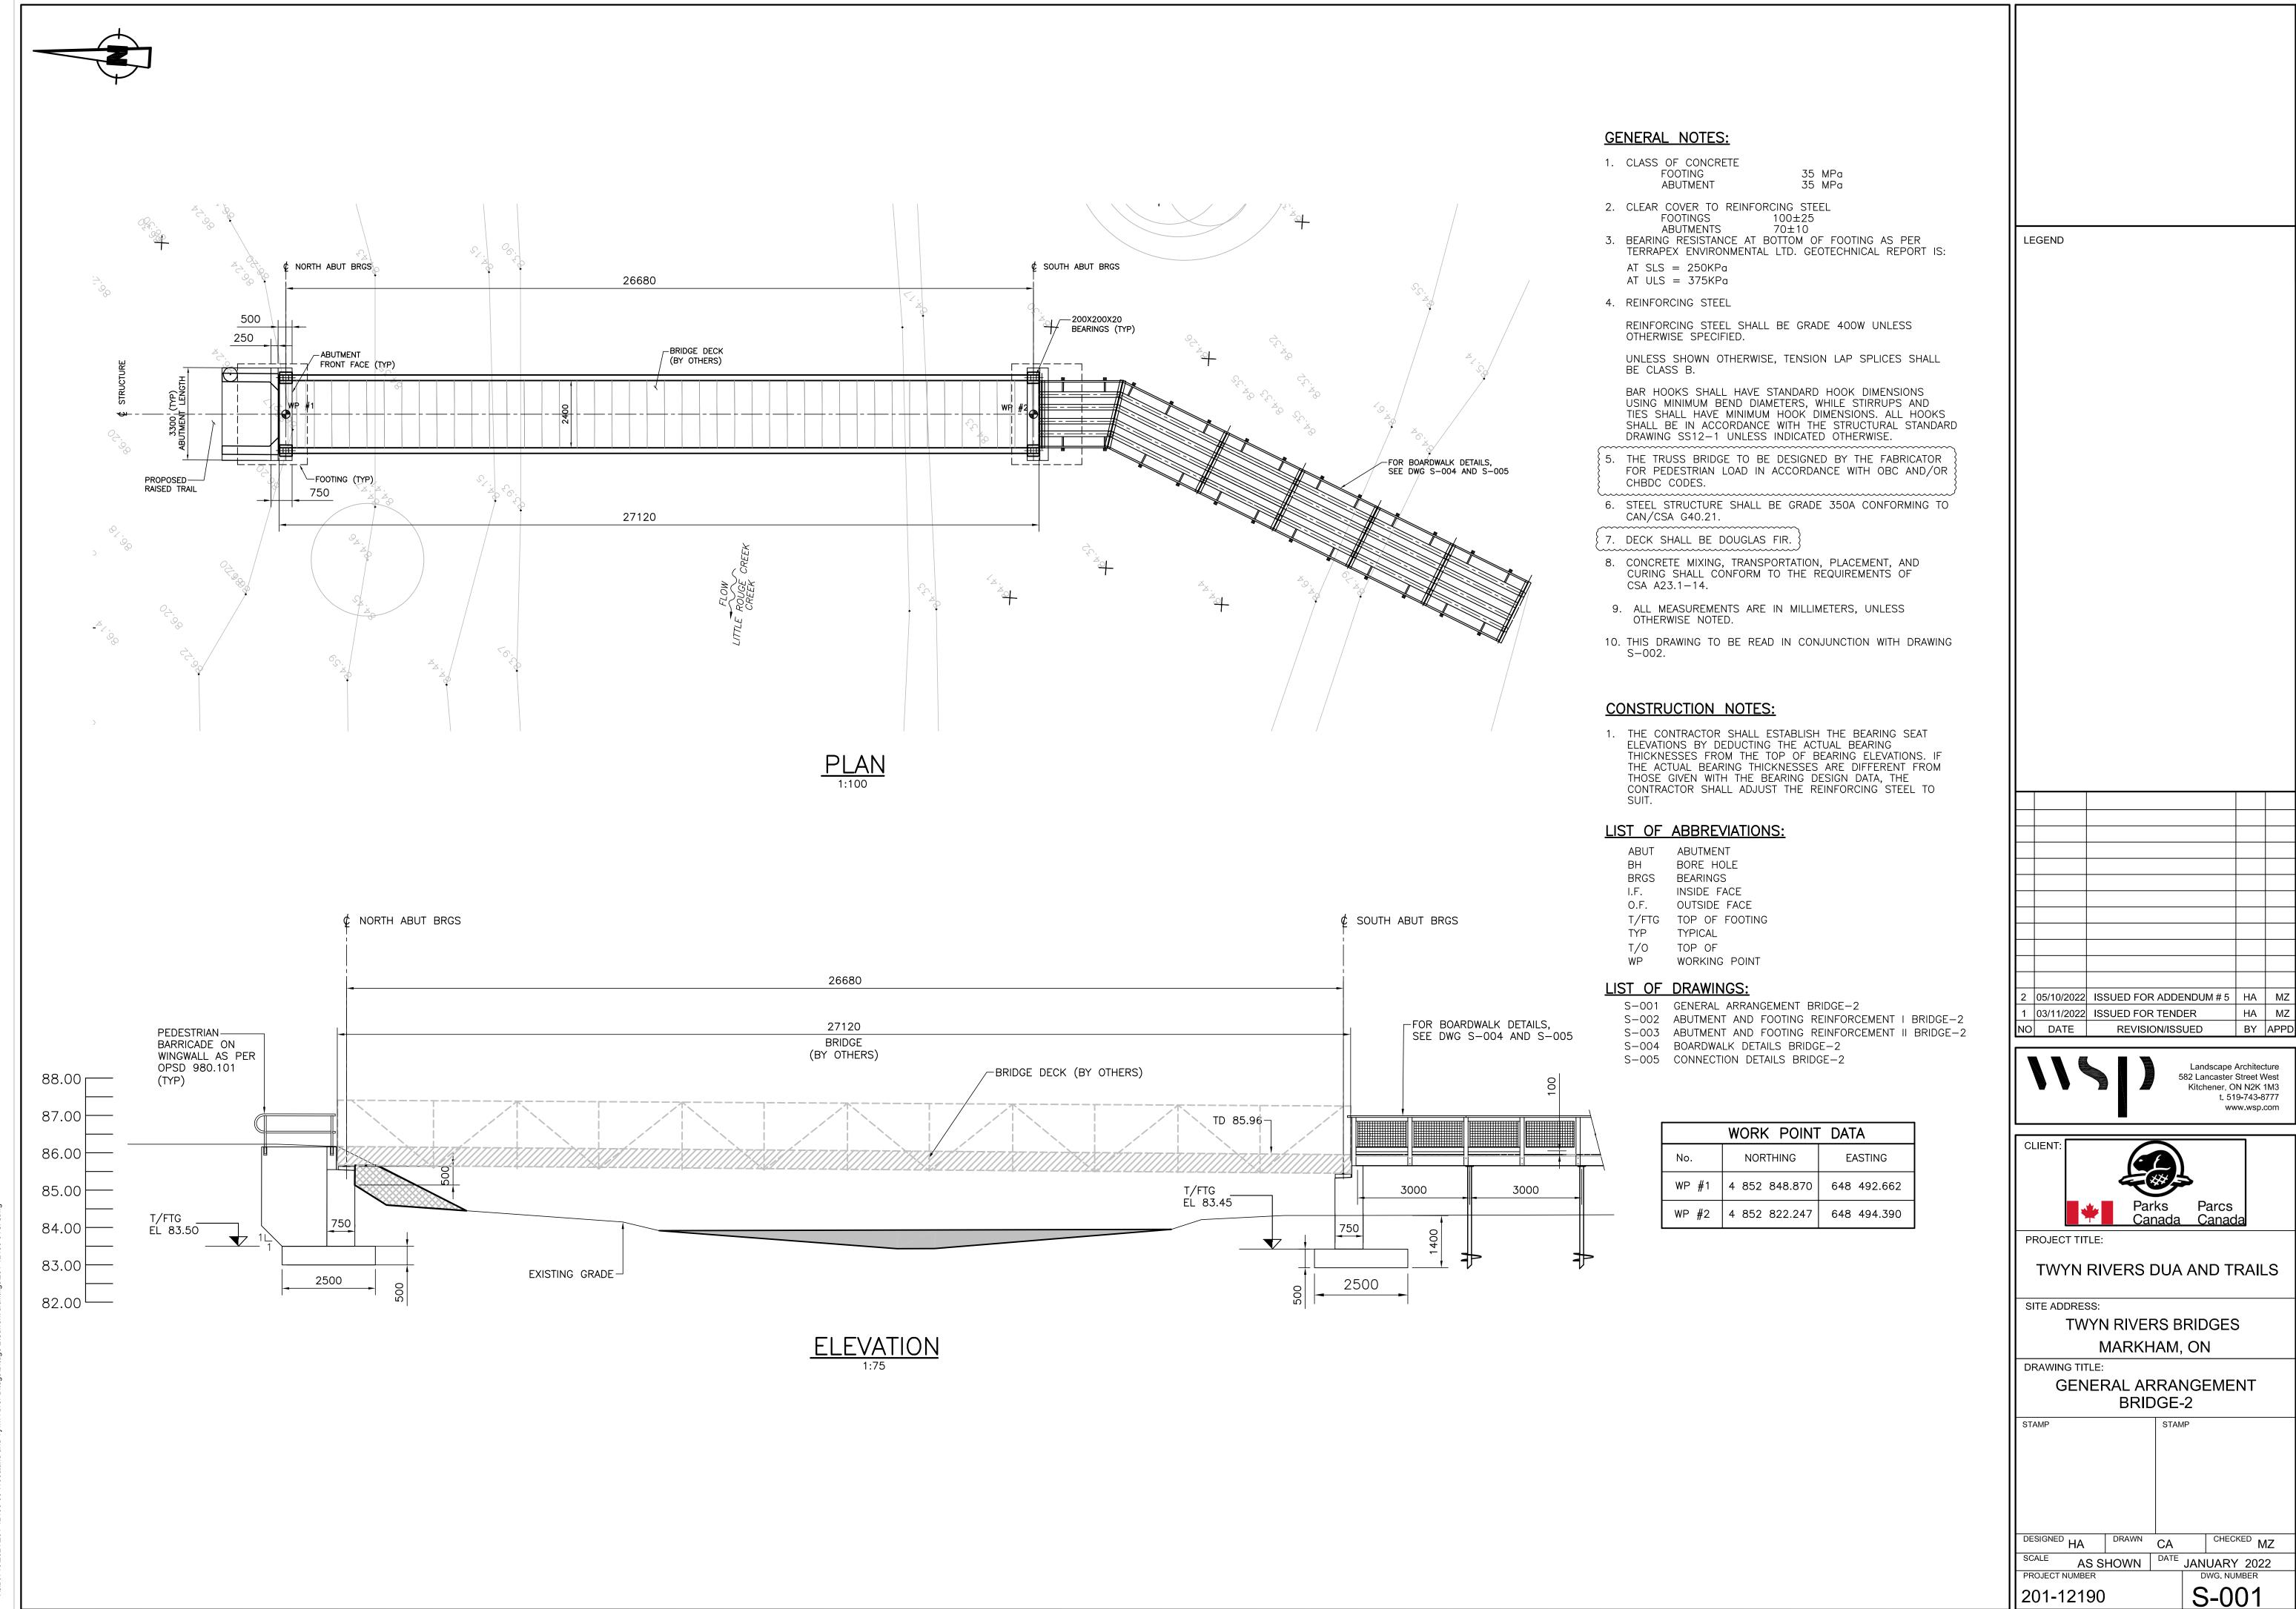

YY/MM/DD5/10/2022 11:35 AM X:\DIV16\2021\2011-12190-00 Woodland and Twwn River Bridgs\Bridge 2\Current drawing