




















LUMINAIRE SCHEDULE												
TYPE 'BATT 1'	Image	Type Image	LAMP TYPE	DESCRIPTION	FIXTURE LUMENS	VOLTAGE	FIXTURE WATTS	CRI	COLOUR TEMP	CONTROLS	MOUNTING	REMARKS
C1			LED	LOW PROFILE CONTINUOUS COVE LIGHTING WITH INTEGRAL DRIVER. LENGTH AS SHOWN ON DRAWING. LUMENS LISTED IS PER FOOT. COVE LUMINAIRES ARE TO BE INSTALLED END-TO-END SUCH THAT DISTANCE BETWEEN LUMINAIRES IS MINIMIZED AND COVE IS EVENLY ILLUMINATED FOR ENTIRE RUN. THIS CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING ALL LEADER/JUMPER CABLES, BRACKETS, FITTINGS, ETC. ARE PROVIDED AS REQUIRED FOR A COMPLETE INSTALLATION. COORDINATE INSTALLATION REQUIREMENTS WITH MANUFACTURER AND ARCHITECTURAL DETAILS PRIOR TO ROUGH-IN.	500	120 V	5 W	>80	4000K	DALI	COVE	
C2			LED	LOW PROFILE CONTINUOUS LED FLEXIBLE STRIP LIGHTING FIXTURE FOR MIRROR ACCENT LIGHTING. LUMENS LISTED IS PER FOOT.	500	120 V	5 W	>80	4000K	DALI	MIRROR	
C3			LED	LOW PROFILE UNDER CABINET LED LIGHTING. CONTRACTOR TO SELECT LENGTHS AS REQUIRED TO SUIT LAYOUT SHOWN ON DRAWING AND MILLWORK DETAILS. PROVIDE ALL CONNECTOR ACCESSORIES AS REQUIRED. LUMENS LISTED IS PER FOOT.	390	120 V	6 W	>80	4000K	DALI	UNDERCABINET	
D1			LED	152mm (6") WIDE SQUARE LED DOWNLIGHT LIGHTING FIXTURE WITH WIDE OPTICS	2000	120 V	16 W	>80	4000K	DALI	RECESSED	
D2			LED	152mm (6") WIDE SQUARE LED DOWNLIGHT LIGHTING FIXTURE WITH WIDE OPTICS	3000	120 V	28 W	>80	4000K	DALI	RECESSED	
D3			LED	152mm (6") DIAM. APERTURE ROUND LED DOWNLIGHT LIGHTING FIXTURE WITH WIDE OPTICS	2000	120 V	16 W	>80	4000K	DALI	RECESSED	
D4			LED	152mm (6") WIDE SQUARE LED DOWNLIGHT LIGHTING FIXTURE WITH WIDE OPTICS	3000	120 V	28 W	>80	4000K	DALI	RECESSED IN MILLWORK WOOD PANEL	
D5			LED	152mm (6") WIDE SQUARE LED DOWNLIGHT LIGHTING FIXTURE WITH WIDE OPTICS AND WET LOCATION LISTED	3000	120 V	28 W	>80	4000K	DALI	RECESSED	
E1			LED	LED PEDESTRIAN POST TOP FIXTURE C/W TYPE 5 WIDE SQUARE OPTICS, BLACK FINISH, AND DALI DRIVER. FIXTURE TO BE SUPPLIED WITH 4.3M ROUND TAPERED STEEL POLE C/W BLACK FINISH TO MATCH FIXTURE.	7017	120 V	67 W	>80	4000K	DALI	EXTERIOR POLE MOUNTED	
E2			LED	EXTERIOR WALL MOUNTED WALL PACK LOW PROFILE ONE-PIECE DIE-CAST ALUMINUM BLACK BOX, TYPE 4 FORWARD THROW OPTICS	6129	120 V	58 W	>80	4000K	DALI	EXTERIOR WALL MOUNTED	
E3			LED	EXTERIOR LOW PROFILE RECESSED DOWNLIGHT IN EXISTING CANOPY	4000	120 V	58 W	>80	4000K	DALI	EXTERIOR RECESSED	
L2			LED	101mm (4") WIDE X 1500mm LONG RECESSED DIRECT LINEAR LED LIGHT FIXTURE WITH FLUSH HOUSING (1020 LUMENS/FT)	5000	120 V	45 W	>80	4000K	DALI	RECESSED	
L2A			LED	SAME AS L2 EXCEPT 1200mm LONG	4000	120 V	36 W	>80	4000K	DALI	RECESSED	
L3			LED	101mm (4") WIDE X 3000mm LONG RECESSED DIRECT LINEAR LED LIGHT FIXTURE WITH FLUSH HOUSING. (1020LUMENS/FT)	9990	120 V	90 W	>80	4000K	DALI	RECESSED	
L4			LED	127mm (5") WIDE RECESSED DIRECT LINEAR LED LIGHT FIXTURE WITH FLUSH HOUSING. LENGTH AS SHOWN ON DRAWINGS. LUMENS LISTED IS PER FOOT.	1270	120 V	11 W	>80	4000K	DALI	RECESSED	
L5			LED	101mm (4") WIDE X 1500mm LONG SUSPENDED DIRECT LINEAR LED LIGHT FIXTURE WITH FLUSH HOUSING (1020 LUMENS/FT)	5000	120 V	45 W	>80	4000K	DALI	SUSPENDED	
P1			LED	1829mm DIAMETER ROUND RING PENDANT WITH DIRECT/INDIRECT OPTICS (21356 LUMENS DIRECT/9039 LUMENS INDIRECT, 3 SUSPENSION POINTS	21356	120 V	216 W	>80	4000K	DALI	PENDANT	
P2			LED	79mm WIDE X 178mm TALL CYLINDER PENDANT LED LIGHTING FIXTURE	400	120 V	8 W	>80	4000K	DALI	PENDANT	

LUMINAIRE SCHEDULE												
TYPE	Image	Type Image	LAMP TYPE	DESCRIPTION	FIXTURE LUMENS	VOLTAGE	FIXTURE WATTS	CRI	COLOUR TEMP	CONTROLS	MOUNTING	REMARKS
P3			LED	101mm (4\") WIDE PENDANT DIRECT/INDIRECT LED LIGHTING FIXTURE WITH CUSTOM ARM LENGTH BRANCHES. (576LUMENS/FT)	5000	120 V	50 W	>80	4000K		PENDANT	
P4			LED	157mm (6\") DIAMETER ROUND CYLINDER PENDANT LED LIGHT FIXTURE C/W INTEGRAL DRIVER, WIDE OPTICS AND PENDANT STEM KIT	4000	120 V	42 W	>80	4000K	DALI	RECESSED	
P5			LED	25mm (1\") DIAMETER x 400mm (16\") HIGH ROUND CYLINDER PENDANT LED LIGHT FIXTURE	250	120 V	3 W	>80	4000K	DALI	RECESSED	
P6			LED	PENDANT LED DECORATIVE FIXTURE	1000	120 V	20 W	>80	4000K	DALI	PENDANT	
P7			LED	70mm (2\") DIAMETER X 263mm HIGH ROUND CYLINDER PENDANT LED LIGHT FIXTURE C/W PENDANT STEM KIT	2000	120 V	21 W	>80	4000K	DALI	PENDANT	
P8			LED	254mm (10\") DIAMETER X 1016mm (40\") HIGH ROUND CYLINDER PENDANT LED LIGHT FIXTURE	4023	120 V	28 W	>80	4000K	DALI	PENDANT	
P9			LED	50mm (2\") DIAMETER x 157mm (16\") HIGH ROUND CYLINDER PENDANT LED LIGHT FIXTURE	2000	120 V	40 W	>80	4000K	DALI	PENDANT	
P10			LED	1067mm DIAMETER ROUND ACOUSTIC DRUM PENDANT WITH FLOOD OPTICS	2600	120 V	25 W	>80	4000K	DALI	PENDANT	
R1			LED	500mm x 1500mm RECESSED SHALLOW LAY-IN T-BAR GRID LIGHTING FIXTURE COMPLETE WITH LINEAR PRISMATIC EXTRUDED FROSTED ACRYLIC DIFFUSER, INDIRECT STEEL REFLECTORS AND WHITE FINISH	4000	120 V	39 W	>80	4000K	DALI	RECESSED	
S1			LED	1219mm (4\") LONG LED LIGHTING FIXTURE C/W ROLL FORMED CODE-GAUGED STEEL HOUSING WITH END CUPS, WHITE POLYESTER POWDER FINISHED, VOLUMETRIC DESIGN LINEAR FACETED REFRACTOR WITH LIGHT DIFFUSING FILM, INTEGRAL LONG LIFE LED'S WITH INTEGRAL HIGH EFFICIENCY DRIVER, ADJUSTABLE AIRCRAFT CABLE WITH POWER FEED AND CONTINUOUS RAW CONNECTOR.	4000	120 V	35 W	>80	4000K	DALI	SUSPENDED	
S2			LED	2438mm (8\") LONG LED LIGHTING FIXTURE C/W ROLL FORMED CODE-GAUGED STEEL HOUSING WITH END CUPS, WHITE POLYESTER POWDER FINISHED, VOLUMETRIC DESIGN LINEAR FACETED REFRACTOR WITH LIGHT DIFFUSING FILM, INTEGRAL LONG LIFE LED'S WITH INTEGRAL HIGH EFFICIENCY DRIVER, ADJUSTABLE AIRCRAFT CABLE WITH POWER FEED AND CONTINUOUS RAW CONNECTOR.	8000	120 V	70 W	>80	4000K	DALI	SUSPENDED	
S3			LED	101mm (4\") WIDE X 406mm (16\") HIGH X 2438mm (8\") LONG SUSPENDED DIRECT/INDIRECT ACOUSTIC LED LIGHTING FIXTURE. LENGTH AS SHOWN ON DRAWINGS. 1020LUMENS/FT		120 V		>80	4000K	DALI	SUSPENDED	SUSPENDED FIXTURE CENTERED OVER FURNITURE
S3B			LED	SAME AS S3 EXCEPT 6096mm LONG LIGHTING FIXTURE	20400	120 V	176 W	>80	4000K	DALI	SUSPENDED	SUSPENDED FIXTURE CENTERED OVER FURNITURE
S4			LED	70mm (2\") WIDE SUSPENDED LINEAR	500	120 V	5 W	>80	4000K	DALI	SUSPENDED	
T1			LED	TRACK LIGHT SYSTEM C/W 4 LED HEADS WITH SPOT DISTRIBUTION OPTICS	3000	120 V	38 W	<85	4000K	DALI	TRACK	
W1			LED	WALL MOUNTED DIRECT/INDIRECT LED LIGHT FIXTURE	3000	120 V	30 W	>80	4000K	DALI	WALL MOUNTED	
W2			LED	CEILING MOUNTED TRACK C/W WALL WASHER HEADS	5000	120 V	45 W	>80	4000K	DALI	SUSPENDED WALL	



project and true North

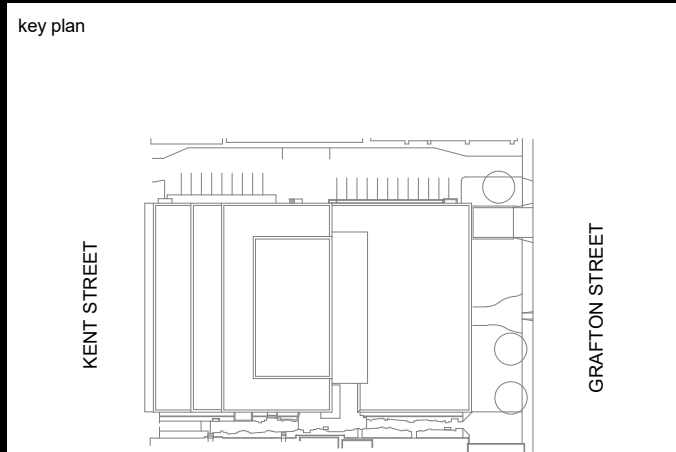project legend