


Margaret Creek Fish Barrier Project

Supplemental Information

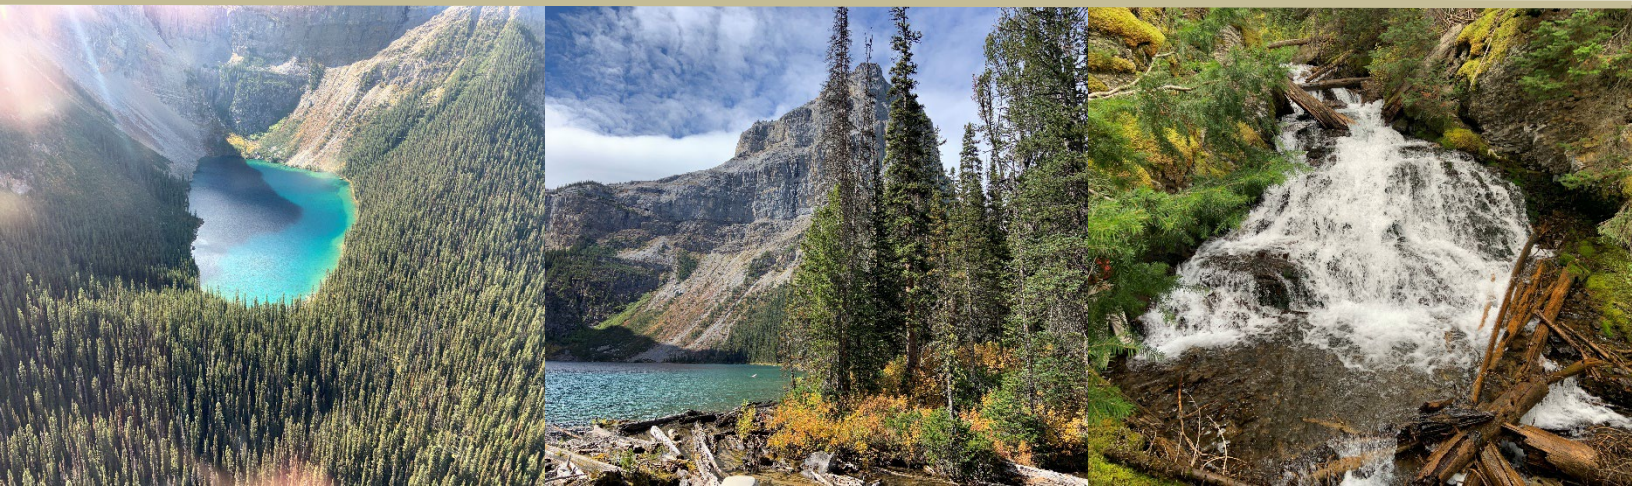

PRESENTED TO

Parks Canada Agency

Lake Louise Yoho Kootenay Field Unit – Banff National Park

MARCH 1, 2022

ISSUED FOR TENDER

FILE: ENG.ROCK03251-01



**Parks
Canada**

**Parcs
Canada**

Tetra Tech Canada Inc.

Suite 1000 – 10th Floor, 885 Dunsmuir Street
Vancouver, BC V6C 1N5 CANADA
Tel 604.685.0275 Fax 604.684.6241

This page intentionally left blank.

TABLE OF CONTENTS

1.0	BACKGROUND	1
2.0	WORK SITE DESCRIPTION	1
3.0	WORK DESCRIPTION	1
4.0	LIMITATIONS OF REPORT	2
5.0	CLOSURE	2
	REFERENCES	3

APPENDIX SECTIONS

PHOTOGRAPHS

APPENDICES

Appendix A Tetra Tech's Limitations on the Use of this Document

1.0 BACKGROUND

Presently, invasive species of Brook Trout can travel from Hector Lake up Margaret Creek and into Lake Margaret. Margaret Creek connects Lake Margaret to Hector Lake in Banff National Park, Alberta (See Photos 1 to 3). The Lake Louise Yoho Kootenay (LLYK) Field Unit plan to remove the non-native Brook Trout from Lake Margaret and reintroduce threatened Species at Risk (SAR) West-Slope Cutthroat Trout. In order to ensure that non-native fish species are unable to reach Lake Margaret once they have been removed, the LLYK Field Unit wishes to construct a minimum 2.5 m high vertical fish barrier at an existing cascading waterfall in the creek.

The existing waterfall in Margaret Creek is approximately 40 m to 50 m upstream from Hector Lake (Photo 4). The most practical way to create a 2.5 m vertical separation at this site is through rock excavation (blasting) of the existing cascading waterfall.

2.0 WORK SITE DESCRIPTION

Due to the remote location of the work site, all materials, equipment, and personnel will need to be flown in by helicopter. Parks Canada will have helipads cleared and constructed on site prior to the start of construction work. The staging area for the work is down the turn off just south of the Mosquito Creek Wilderness Hostel, approximately 24 km north along the Icefield's Parkway (IFP) from the junction with the Trans-Canada Highway (TCH).

Based on bedrock geology map 1464A (Geological Survey of Canada, 1978), and verified during the site visit, the proposed barrier location comprises mainly quartzite and quartzose sandstone of the Gog Group from the Lower Cambrian period. During the site visit, it was noted that bedding was dipping into the waterfall with an apparent dip of about 30°.

Blasting work in the creek will need to be undertaken in dry conditions. This will necessitate the use of an upstream coffer dam to redirect the creek flow around the work site. The creek diversion system should be designed to accommodate flowrates of 0.7 m³/s to 1.5 m³/s.

3.0 WORK DESCRIPTION

A portion of the existing stream bed will be excavated with blasting to produce a minimum 2.5 m vertical drop at the location of an existing cascading waterfall (greater than 2.5 m tall vertical drop is acceptable).

Rock should be blasted such that it is "thrown" in place below the excavation. This will limit the plunge pool depth below the waterfall and will not require machinery for placement. By limiting the plunge pool depth, this will prevent fish from having a "running start" to jump up the waterfall. Photos 5 and 6 in the attached photo package show an overview of the plunge pool.

A cofferdam will be required upstream to redirect the creek flow around the work site such that blasting can be completed in controlled conditions. The cofferdam may be constructed using polypropylene 1 cubic yard tote bags filled with washed pea gravel and a HDPE liner to seal the dam. The pumps and piping required for the creek diversion should be sized appropriately to accommodate flow rates mentioned above.

A suitable location for the coffer dam was identified during the September 2021 site visit. This location is shown in Photos 7 and 8. The distance from the proposed coffer dam location to the discharge location is approximately 33 m across moderately sloping undulating terrain. Trees can be used to sling the pipe along the creek's bank to achieve

the optimal route, assuming the maximum curvature of the pipe is about 25 diameters of the pipe. Appropriately sized priming pumps should be used to create the syphon.

Blast monitoring may be undertaken to ensure Peak Particle Velocities are within acceptable limits specified by the Canadian Department of Fisheries and Oceans.

4.0 LIMITATIONS OF REPORT

This report and its contents are intended for the sole use of Parks Canada Agency and their agents. Tetra Tech Canada Inc. (Tetra Tech) does not accept any responsibility for the accuracy of any of the data, the analysis, or the recommendations contained or referenced in the report when the report is used or relied upon by any Party other than Parks Canada Agency, or for any Project other than the proposed development at the subject site. Any such unauthorized use of this report is at the sole risk of the user. Use of this document is subject to the Limitations on the Use of this Document attached in the Appendix or Contractual Terms and Conditions executed by both parties.

5.0 CLOSURE

We trust this technical memo meets your present requirements. If you have any questions or comments, please contact the undersigned.

Respectfully Submitted,
Tetra Tech Canada Inc.

FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01
ISSUED FOR TENDER
FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01

Prepared by:
Lauren Taaffe, P.Eng.
Geotechnical Engineer
Rock Engineering Group
Direct Line: 778.945.5736
Lauren.Taaffe@tetrattech.com

FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01
ISSUED FOR TENDER
FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01

Reviewed by:
Anders EG Frappell, P.Eng., FGS
Team Leader
Rock Engineering Group
Direct Line: 778.945.5833
Anders.Frappell@tetrattech.com

FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01
ISSUED FOR TENDER
FILE: 704-ENG.ROCK03251-01
FILE: 704-ENG.ROCK03251-01


Reviewed by:
Paul Kilkenny, P.Geo., P.Eng.
Manager
Rock Engineering Group
Phone: 604.608.8623
Paul.Kilkenny@tetrattech.com


LT/AEF/PK/cy


REFERENCES

Geology, Hector Lake (west half), west of fifth meridian, Alberta-British Columbia; Price, R A; Mountjoy, E W.
Geological Survey of Canada, "A" Series Map 1464A, 1978, 2 sheets, <https://doi.org/10.4095/109102>


PHOTOGRAPHS

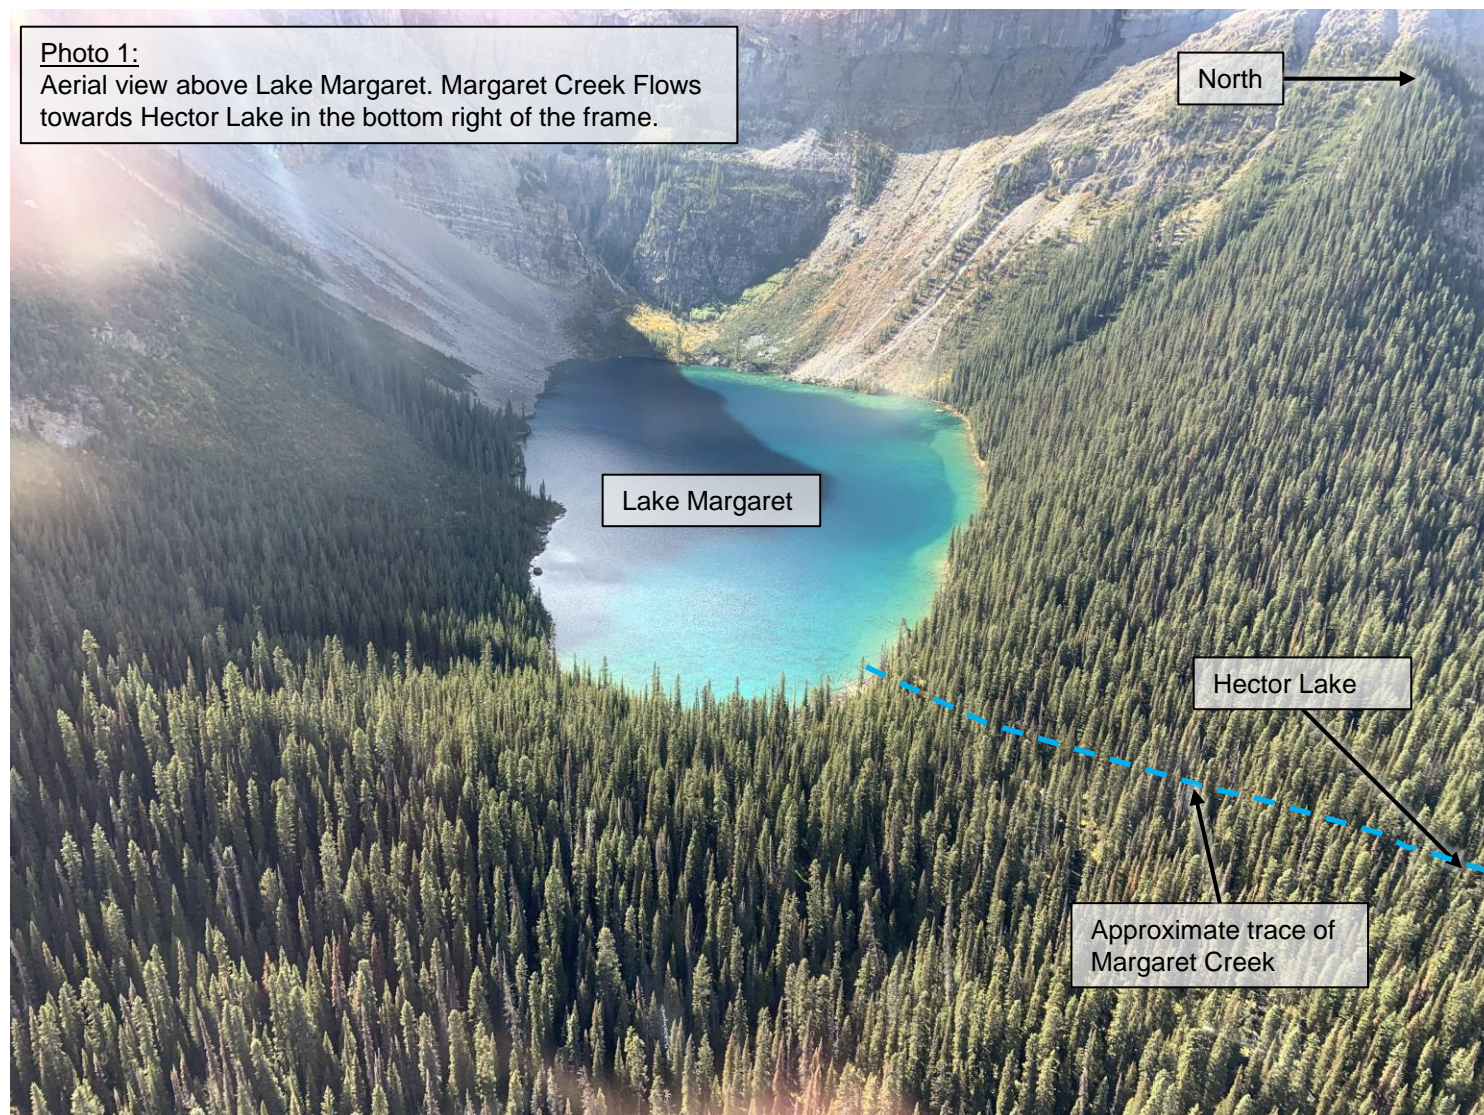


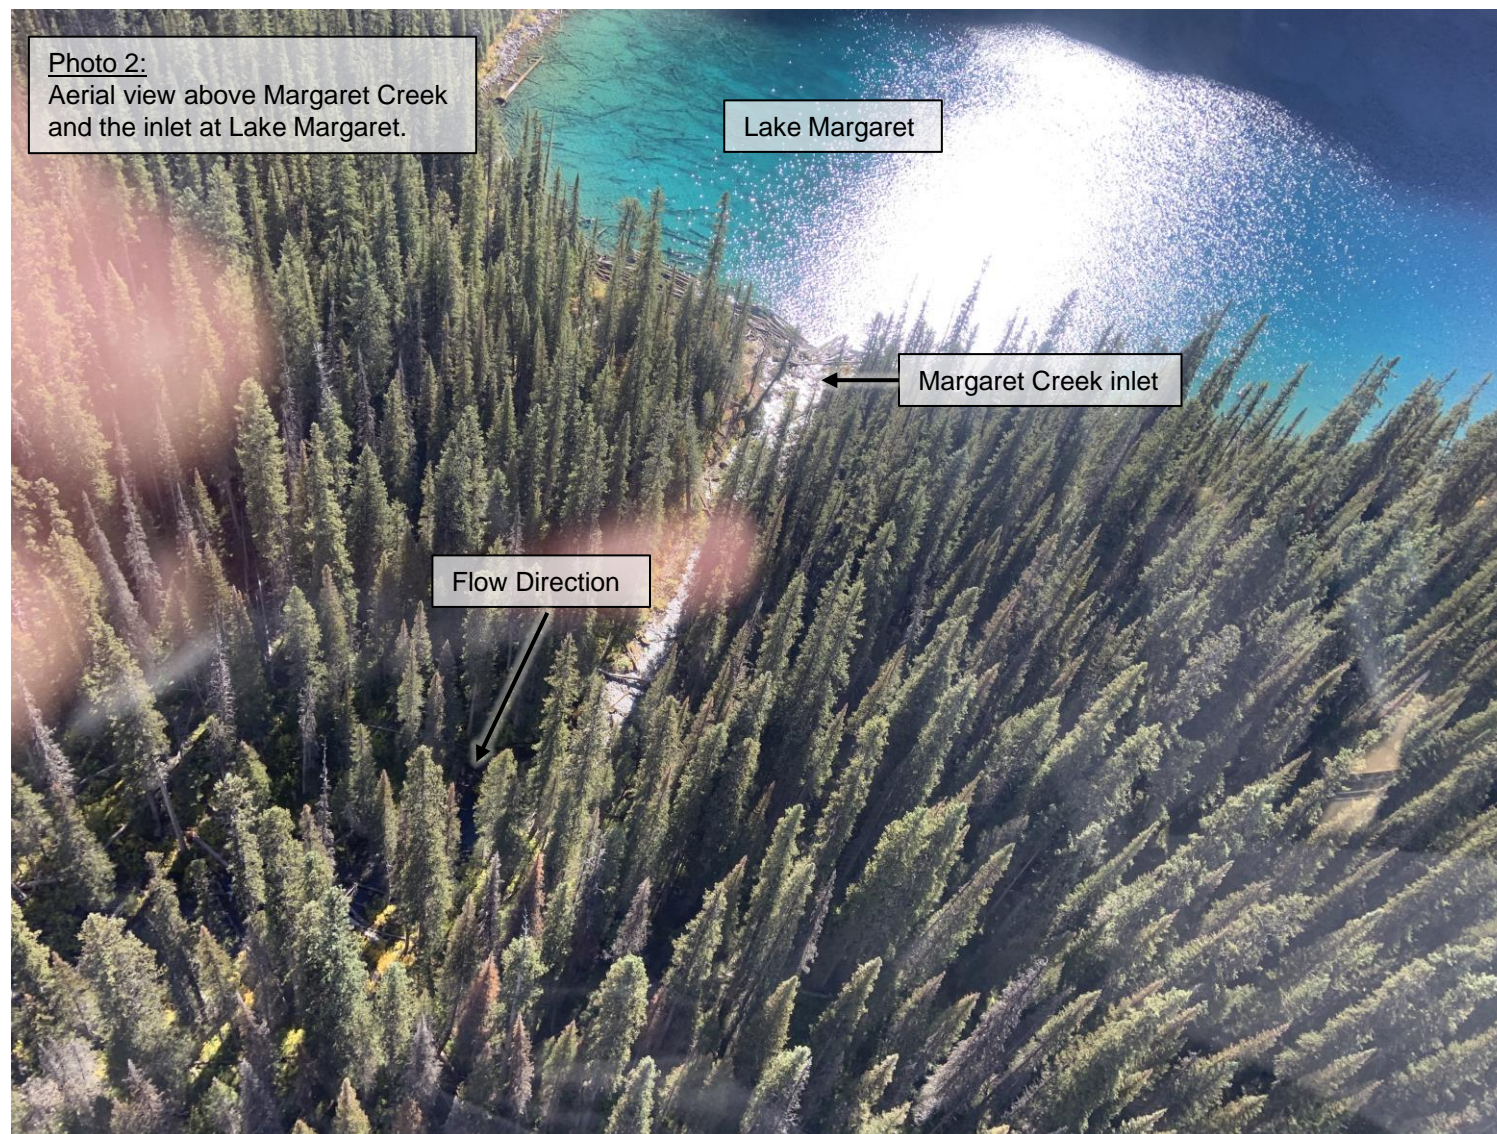

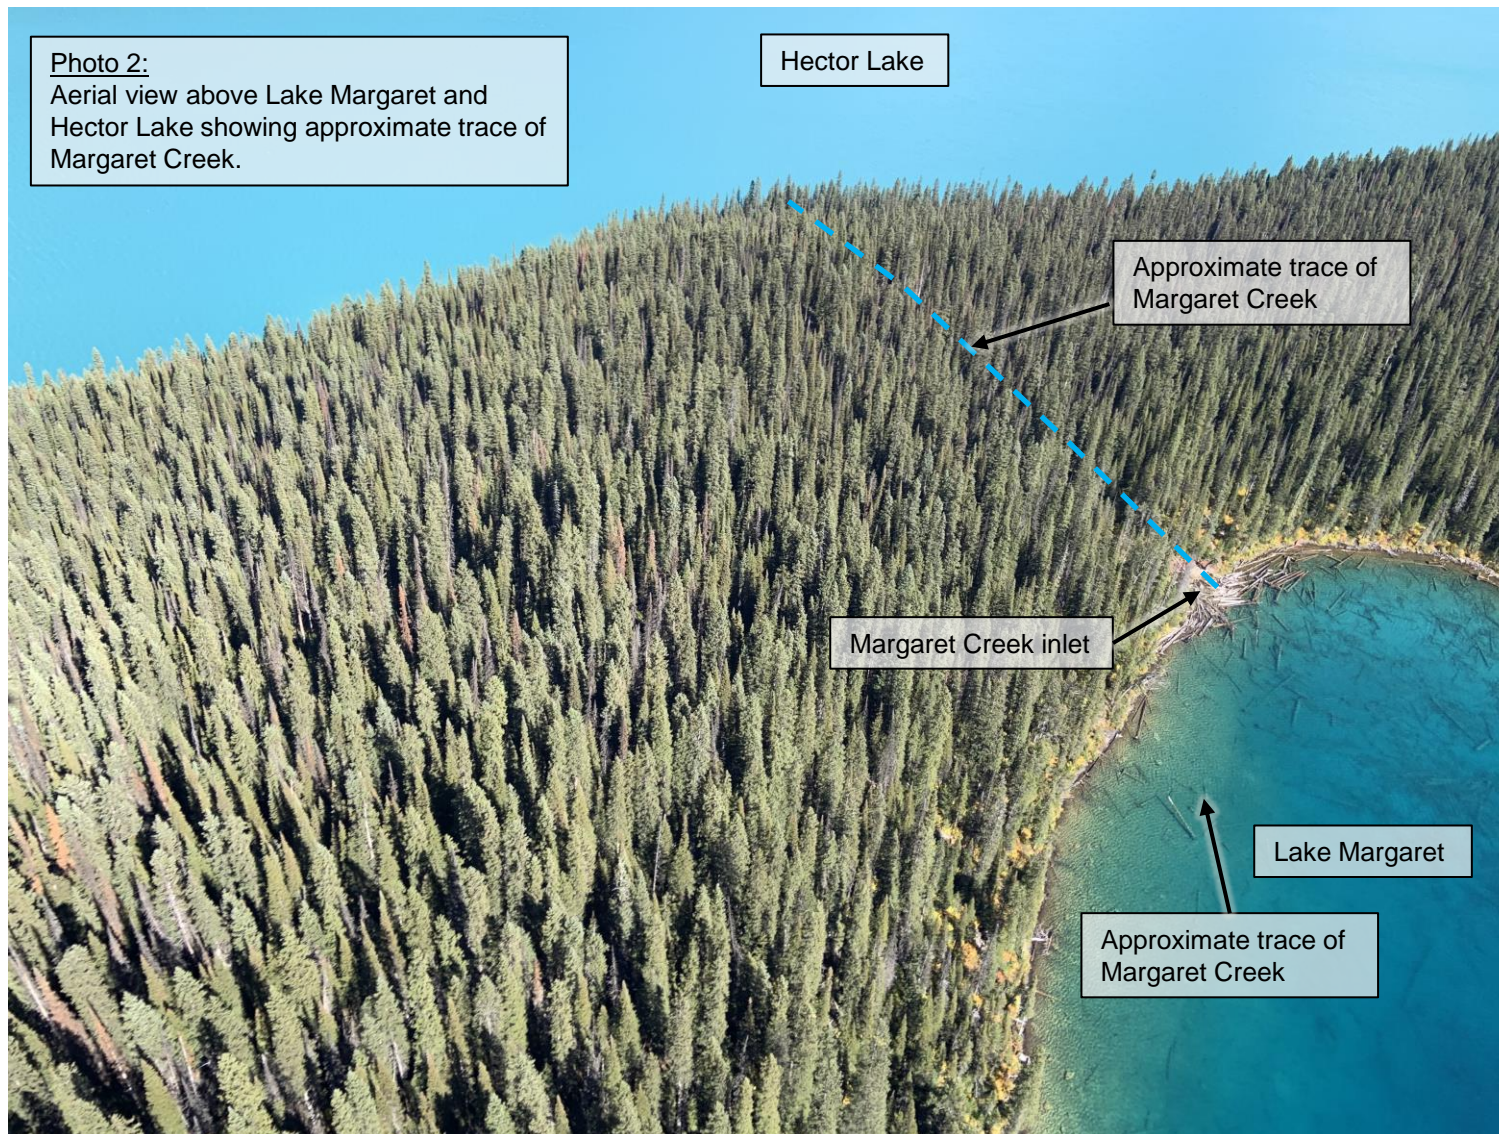



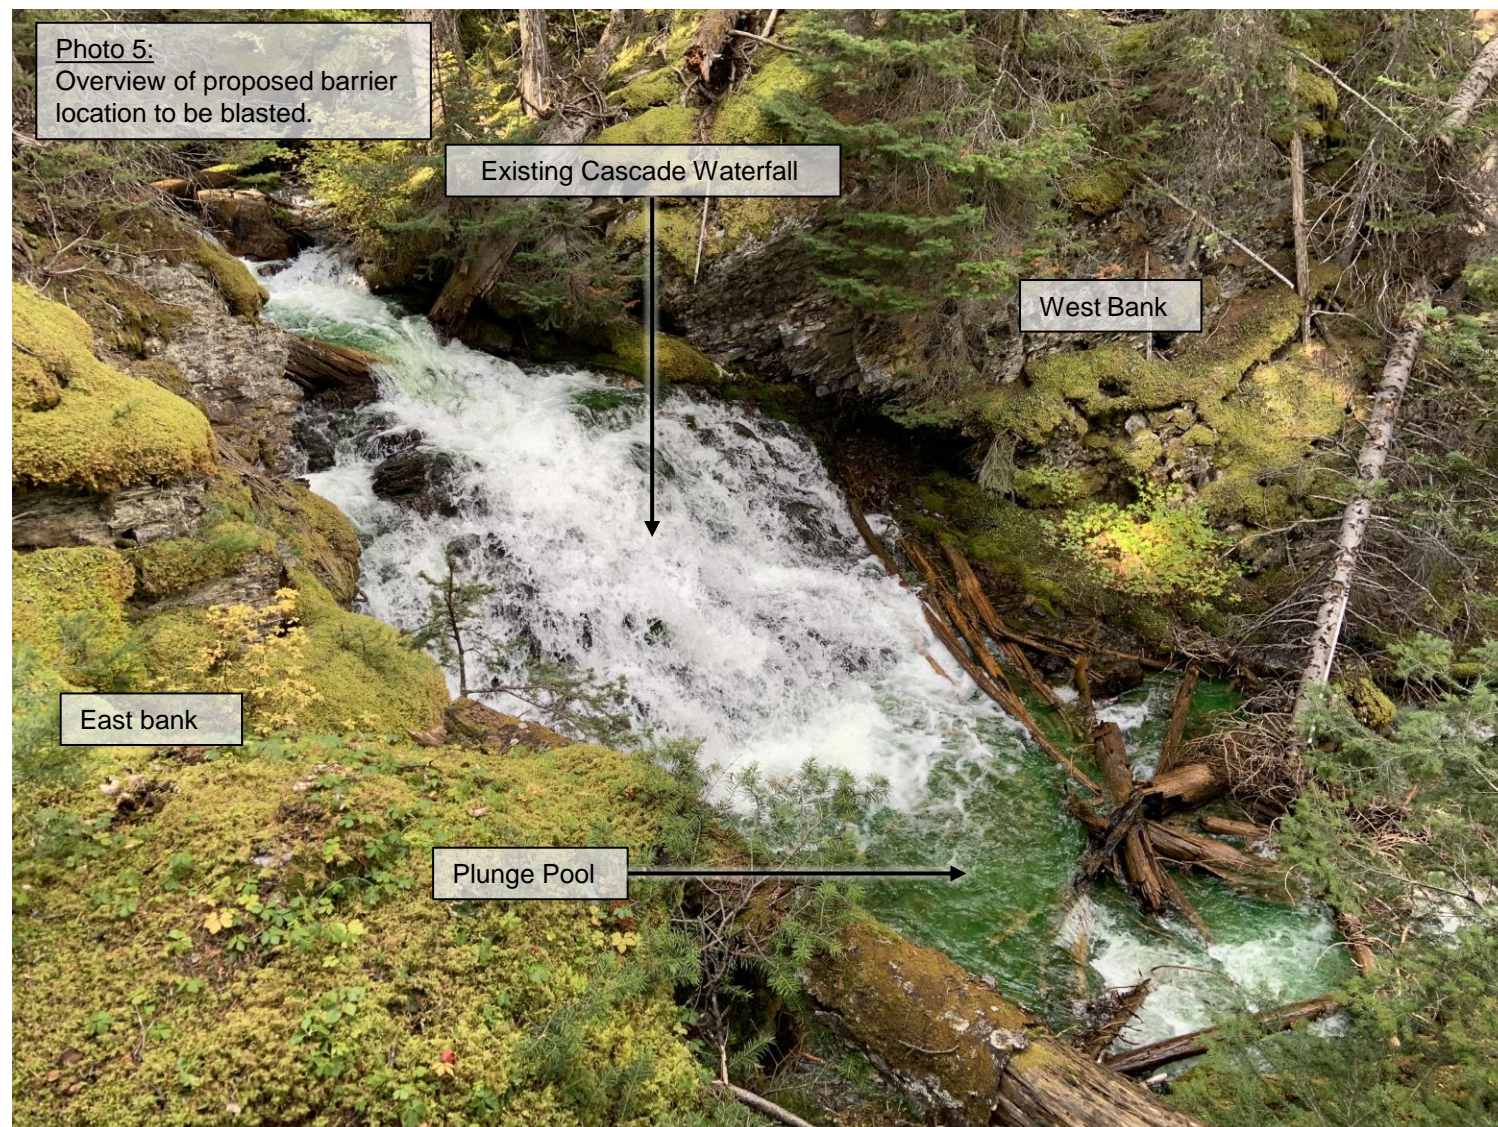

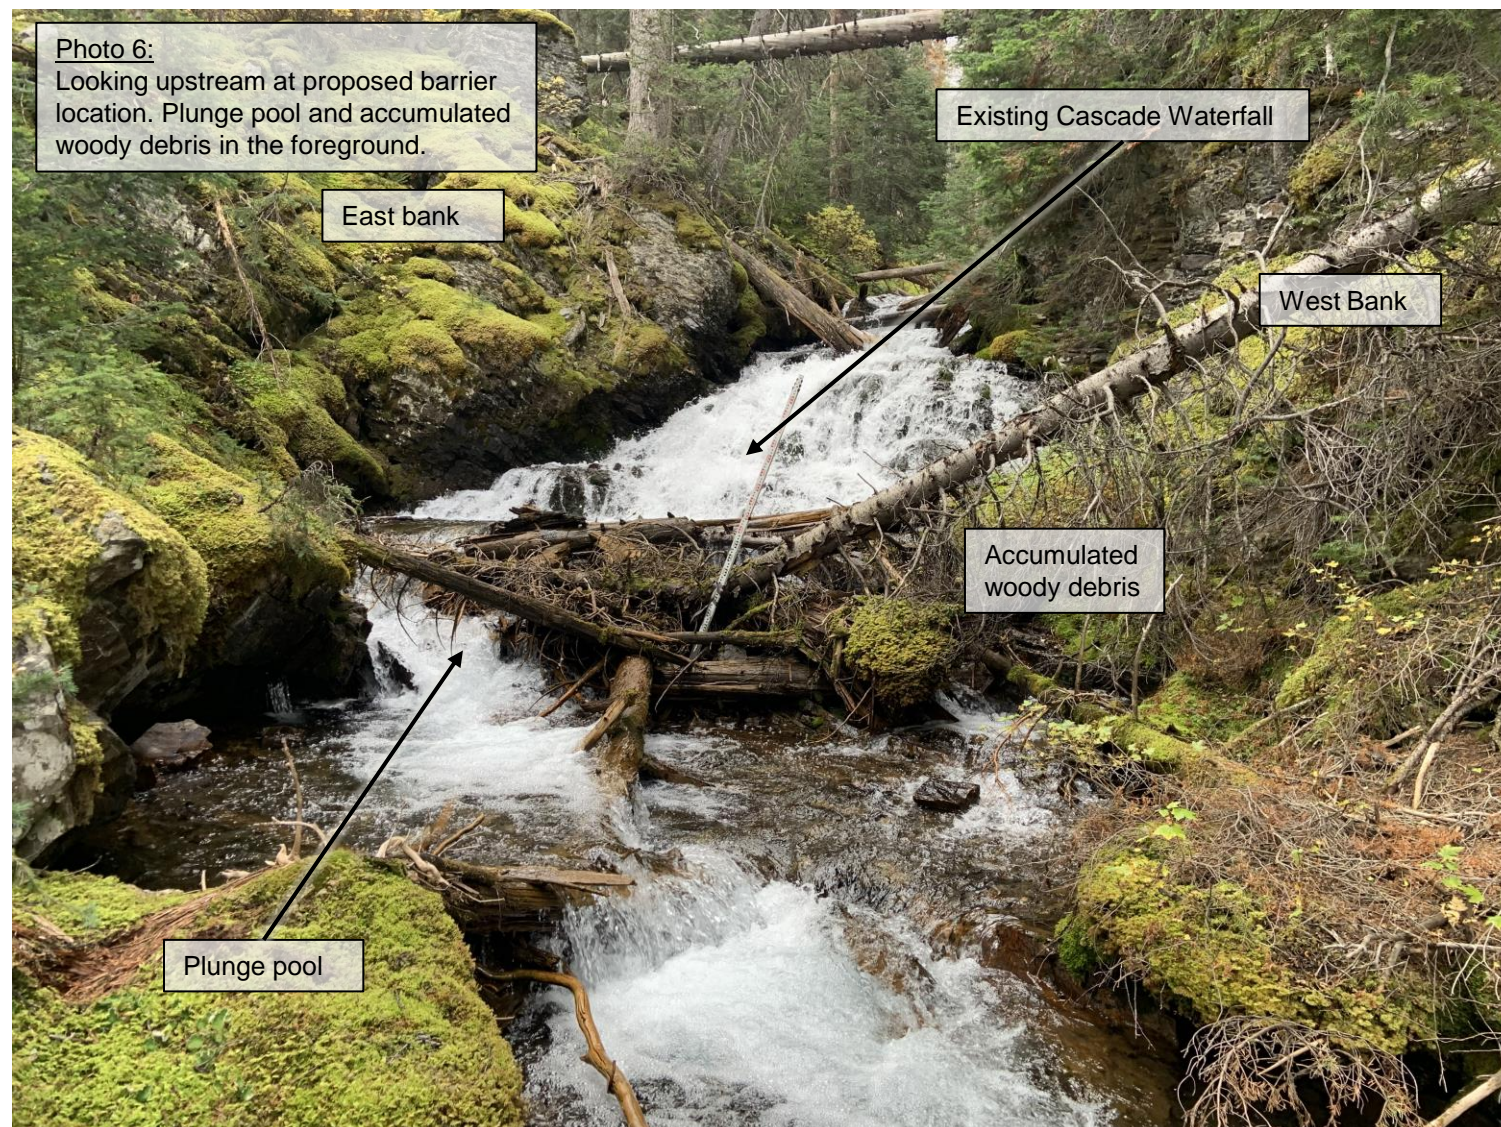





APPENDIX A

TETRA TECH'S LIMITATIONS ON THE USE OF THIS DOCUMENT

LIMITATIONS ON USE OF THIS DOCUMENT

GEOTECHNICAL

1.1 USE OF DOCUMENT AND OWNERSHIP

This document pertains to a specific site, a specific development, and a specific scope of work. The document may include plans, drawings, profiles and other supporting documents that collectively constitute the document (the "Professional Document").

The Professional Document is intended for the sole use of TETRA TECH's Client (the "Client") as specifically identified in the TETRA TECH Services Agreement or other Contractual Agreement entered into with the Client (either of which is termed the "Contract" herein). TETRA TECH does not accept any responsibility for the accuracy of any of the data, analyses, recommendations or other contents of the Professional Document when it is used or relied upon by any party other than the Client, unless authorized in writing by TETRA TECH.

Any unauthorized use of the Professional Document is at the sole risk of the user. TETRA TECH accepts no responsibility whatsoever for any loss or damage where such loss or damage is alleged to be or, in fact, caused by the unauthorized use of the Professional Document.

Where TETRA TECH has expressly authorized the use of the Professional Document by a third party (an "Authorized Party"), consideration for such authorization is the Authorized Party's acceptance of these Limitations on Use of this Document as well as any limitations on liability contained in the Contract with the Client (all of which is collectively termed the "Limitations on Liability"). The Authorized Party should carefully review both these Limitations on Use of this Document and the Contract prior to making any use of the Professional Document. Any use made of the Professional Document by an Authorized Party constitutes the Authorized Party's express acceptance of, and agreement to, the Limitations on Liability.

The Professional Document and any other form or type of data or documents generated by TETRA TECH during the performance of the work are TETRA TECH's professional work product and shall remain the copyright property of TETRA TECH.

The Professional Document is subject to copyright and shall not be reproduced either wholly or in part without the prior, written permission of TETRA TECH. Additional copies of the Document, if required, may be obtained upon request.

1.2 ALTERNATIVE DOCUMENT FORMAT

Where TETRA TECH submits electronic file and/or hard copy versions of the Professional Document or any drawings or other project-related documents and deliverables (collectively termed TETRA TECH's "Instruments of Professional Service"), only the signed and/or sealed versions shall be considered final. The original signed and/or sealed electronic file and/or hard copy version archived by TETRA TECH shall be deemed to be the original. TETRA TECH will archive a protected digital copy of the original signed and/or sealed version for a period of 10 years.

Both electronic file and/or hard copy versions of TETRA TECH's Instruments of Professional Service shall not, under any circumstances, be altered by any party except TETRA TECH. TETRA TECH's Instruments of Professional Service will be used only and exactly as submitted by TETRA TECH.

Electronic files submitted by TETRA TECH have been prepared and submitted using specific software and hardware systems. TETRA TECH makes no representation about the compatibility of these files with the Client's current or future software and hardware systems.

1.3 STANDARD OF CARE

Services performed by TETRA TECH for the Professional Document have been conducted in accordance with the Contract, in a manner consistent with the level of skill ordinarily exercised by members of the profession currently practicing under similar conditions in the jurisdiction in which the services are provided. Professional judgment has been applied in developing the conclusions and/or recommendations provided in this Professional Document. No warranty or guarantee, express or implied, is made concerning the test results, comments, recommendations, or any other portion of the Professional Document.

If any error or omission is detected by the Client or an Authorized Party, the error or omission must be immediately brought to the attention of TETRA TECH.

1.4 DISCLOSURE OF INFORMATION BY CLIENT

The Client acknowledges that it has fully cooperated with TETRA TECH with respect to the provision of all available information on the past, present, and proposed conditions on the site, including historical information respecting the use of the site. The Client further acknowledges that in order for TETRA TECH to properly provide the services contracted for in the Contract, TETRA TECH has relied upon the Client with respect to both the full disclosure and accuracy of any such information.

1.5 INFORMATION PROVIDED TO TETRA TECH BY OTHERS

During the performance of the work and the preparation of this Professional Document, TETRA TECH may have relied on information provided by third parties other than the Client.

While TETRA TECH endeavours to verify the accuracy of such information, TETRA TECH accepts no responsibility for the accuracy or the reliability of such information even where inaccurate or unreliable information impacts any recommendations, design or other deliverables and causes the Client or an Authorized Party loss or damage.

1.6 GENERAL LIMITATIONS OF DOCUMENT

This Professional Document is based solely on the conditions presented and the data available to TETRA TECH at the time the data were collected in the field or gathered from available databases.

The Client, and any Authorized Party, acknowledges that the Professional Document is based on limited data and that the conclusions, opinions, and recommendations contained in the Professional Document are the result of the application of professional judgment to such limited data.

The Professional Document is not applicable to any other sites, nor should it be relied upon for types of development other than those to which it refers. Any variation from the site conditions present, or variation in assumed conditions which might form the basis of design or recommendations as outlined in this document, at or on the development proposed as of the date of the Professional Document requires a supplementary exploration, investigation, and assessment.

TETRA TECH is neither qualified to, nor is it making, any recommendations with respect to the purchase, sale, investment or development of the property, the decisions on which are the sole responsibility of the Client.

1.7 ENVIRONMENTAL AND REGULATORY ISSUES

Unless stipulated in the report, TETRA TECH has not been retained to explore, address or consider and has not explored, addressed or considered any environmental or regulatory issues associated with development on the subject site.

1.8 NATURE AND EXACTNESS OF SOIL AND ROCK DESCRIPTIONS

Classification and identification of soils and rocks are based upon commonly accepted systems, methods and standards employed in professional geotechnical practice. This report contains descriptions of the systems and methods used. Where deviations from the system or method prevail, they are specifically mentioned.

Classification and identification of geological units are judgmental in nature as to both type and condition. TETRA TECH does not warrant conditions represented herein as exact, but infers accuracy only to the extent that is common in practice.

Where subsurface conditions encountered during development are different from those described in this report, qualified geotechnical personnel should revisit the site and review recommendations in light of the actual conditions encountered.

1.9 LOGS OF TESTHOLES

The testhole logs are a compilation of conditions and classification of soils and rocks as obtained from field observations and laboratory testing of selected samples. Soil and rock zones have been interpreted. Change from one geological zone to the other, indicated on the logs as a distinct line, can be, in fact, transitional. The extent of transition is interpretive. Any circumstance which requires precise definition of soil or rock zone transition elevations may require further investigation and review.

1.10 STRATIGRAPHIC AND GEOLOGICAL INFORMATION

The stratigraphic and geological information indicated on drawings contained in this report are inferred from logs of test holes and/or soil/rock exposures. Stratigraphy is known only at the locations of the test hole or exposure. Actual geology and stratigraphy between test holes and/or exposures may vary from that shown on these drawings. Natural variations in geological conditions are inherent and are a function of the historical environment. TETRA TECH does not represent the conditions illustrated as exact but recognizes that variations will exist. Where knowledge of more precise locations of geological units is necessary, additional exploration and review may be necessary.

1.11 PROTECTION OF EXPOSED GROUND

Excavation and construction operations expose geological materials to climatic elements (freeze/thaw, wet/dry) and/or mechanical disturbance which can cause severe deterioration. Unless otherwise specifically indicated in this report, the walls and floors of excavations must be protected from the elements, particularly moisture, desiccation, frost action and construction traffic.

1.12 SUPPORT OF ADJACENT GROUND AND STRUCTURES

Unless otherwise specifically advised, support of ground and structures adjacent to the anticipated construction and preservation of adjacent ground and structures from the adverse impact of construction activity is required.

1.13 INFLUENCE OF CONSTRUCTION ACTIVITY

Construction activity can impact structural performance of adjacent buildings and other installations. The influence of all anticipated construction activities should be considered by the contractor, owner, architect and prime engineer in consultation with a geotechnical engineer when the final design and construction techniques, and construction sequence are known.

1.14 OBSERVATIONS DURING CONSTRUCTION

Because of the nature of geological deposits, the judgmental nature of geotechnical engineering, and the potential of adverse circumstances arising from construction activity, observations during site preparation, excavation and construction should be carried out by a geotechnical engineer. These observations may then serve as the basis for confirmation and/or alteration of geotechnical recommendations or design guidelines presented herein.

1.15 DRAINAGE SYSTEMS

Unless otherwise specified, it is a condition of this report that effective temporary and permanent drainage systems are required and that they must be considered in relation to project purpose and function. Where temporary or permanent drainage systems are installed within or around a structure, these systems must protect the structure from loss of ground due to mechanisms such as internal erosion and must be designed so as to assure continued satisfactory performance of the drains. Specific design details regarding the geotechnical aspects of such systems (e.g. bedding material, surrounding soil, soil cover, geotextile type) should be reviewed by the geotechnical engineer to confirm the performance of the system is consistent with the conditions used in the geotechnical design.

1.16 DESIGN PARAMETERS

Bearing capacities for Limit States or Allowable Stress Design, strength/stiffness properties and similar geotechnical design parameters quoted in this report relate to a specific soil or rock type and condition. Construction activity and environmental circumstances can materially change the condition of soil or rock. The elevation at which a soil or rock type occurs is variable. It is a requirement of this report that structural elements be founded in and/or upon geological materials of the type and in the condition used in this report. Sufficient observations should be made by qualified geotechnical personnel during construction to assure that the soil and/or rock conditions considered in this report in fact exist at the site.

1.17 SAMPLES

TETRA TECH will retain all soil and rock samples for 30 days after this report is issued. Further storage or transfer of samples can be made at the Client's expense upon written request, otherwise samples will be discarded.

1.18 APPLICABLE CODES, STANDARDS, GUIDELINES & BEST PRACTICE

This document has been prepared based on the applicable codes, standards, guidelines or best practice as identified in the report. Some mandated codes, standards and guidelines (such as ASTM, AASHTO Bridge Design/Construction Codes, Canadian Highway Bridge Design Code, National/Provincial Building Codes) are routinely updated and corrections made. TETRA TECH cannot predict nor be held liable for any such future changes, amendments, errors or omissions in these documents that may have a bearing on the assessment, design or analyses included in this report.