


PRINCIPAL PARTICULARS:

L.O.A. _____ 95'-0"
 BEAM _____ 28'-10"
 DEPTH _____ 13'-4"
 DRAFT _____ 9'-6"
 RAKE OF KEEL — 4'-1" IN 87'-0"
 DISPLACEMENT _____ 350 L.T.

CONSTRUCTION: LONGITUDINALLY FRAMED STEEL HULL c/w ALUMINUM HOUSE.

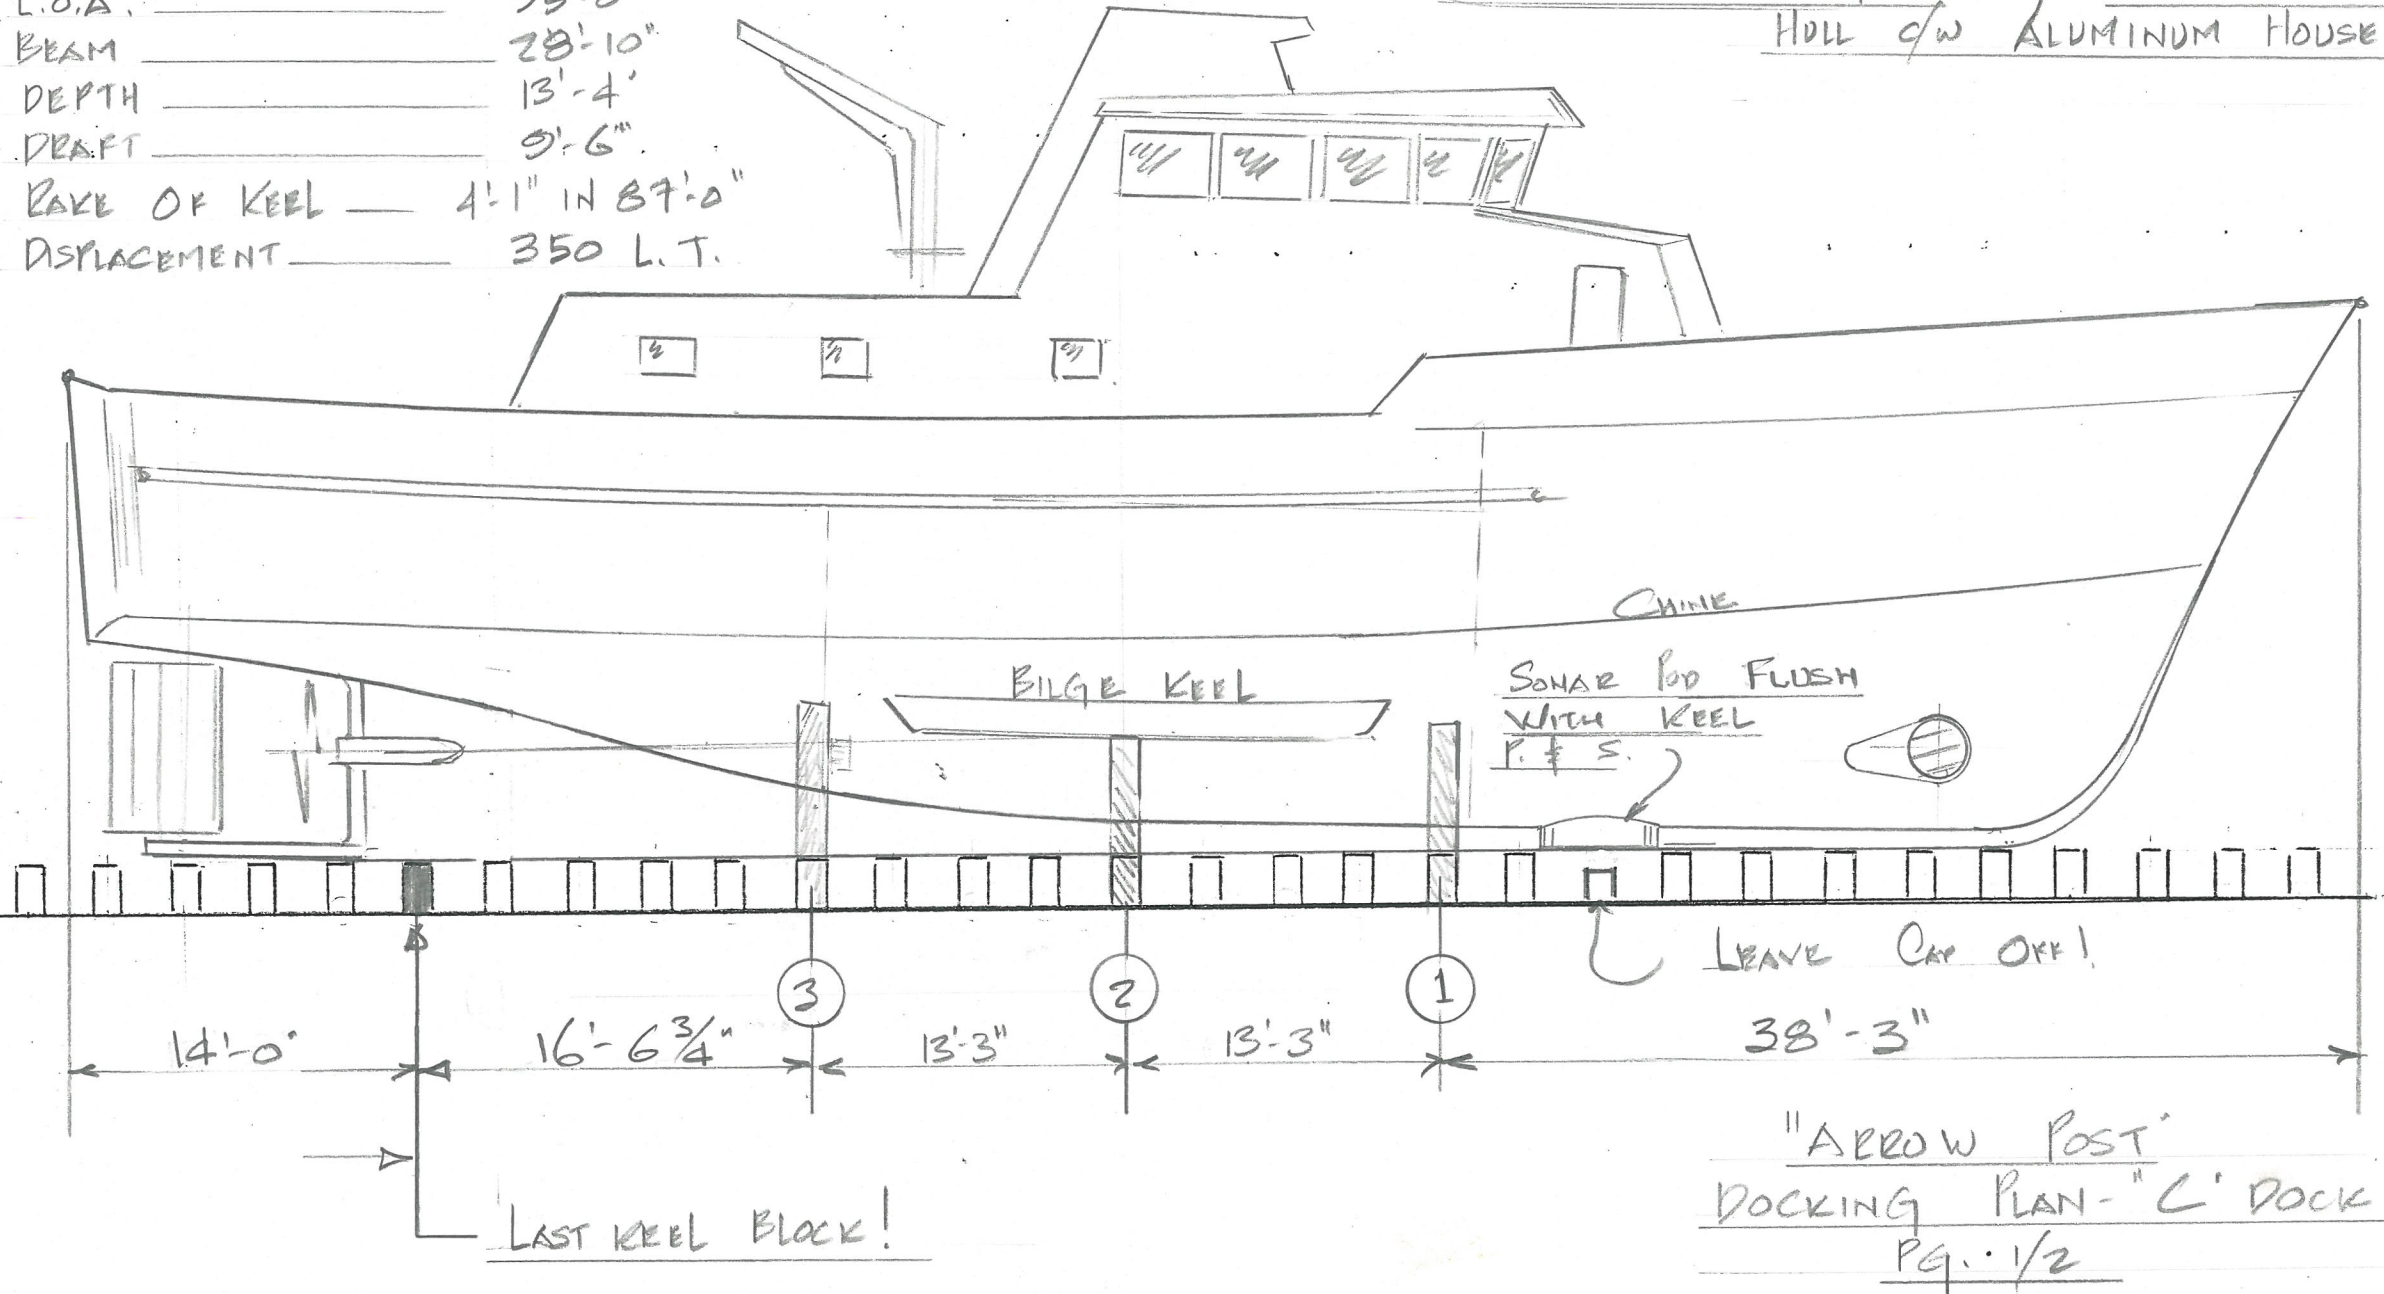

2nd Dry-Docking - July 25, 2018 to July 31, 2018

REVISED 2 SEPT. 1992

July 15, 1992


ARROW POST

DOCKING PLAN - "C" DOCK

15 July 1992

SHT. 2/2

2nd Dry Docking - July 25, 2018 to July 31, 2018

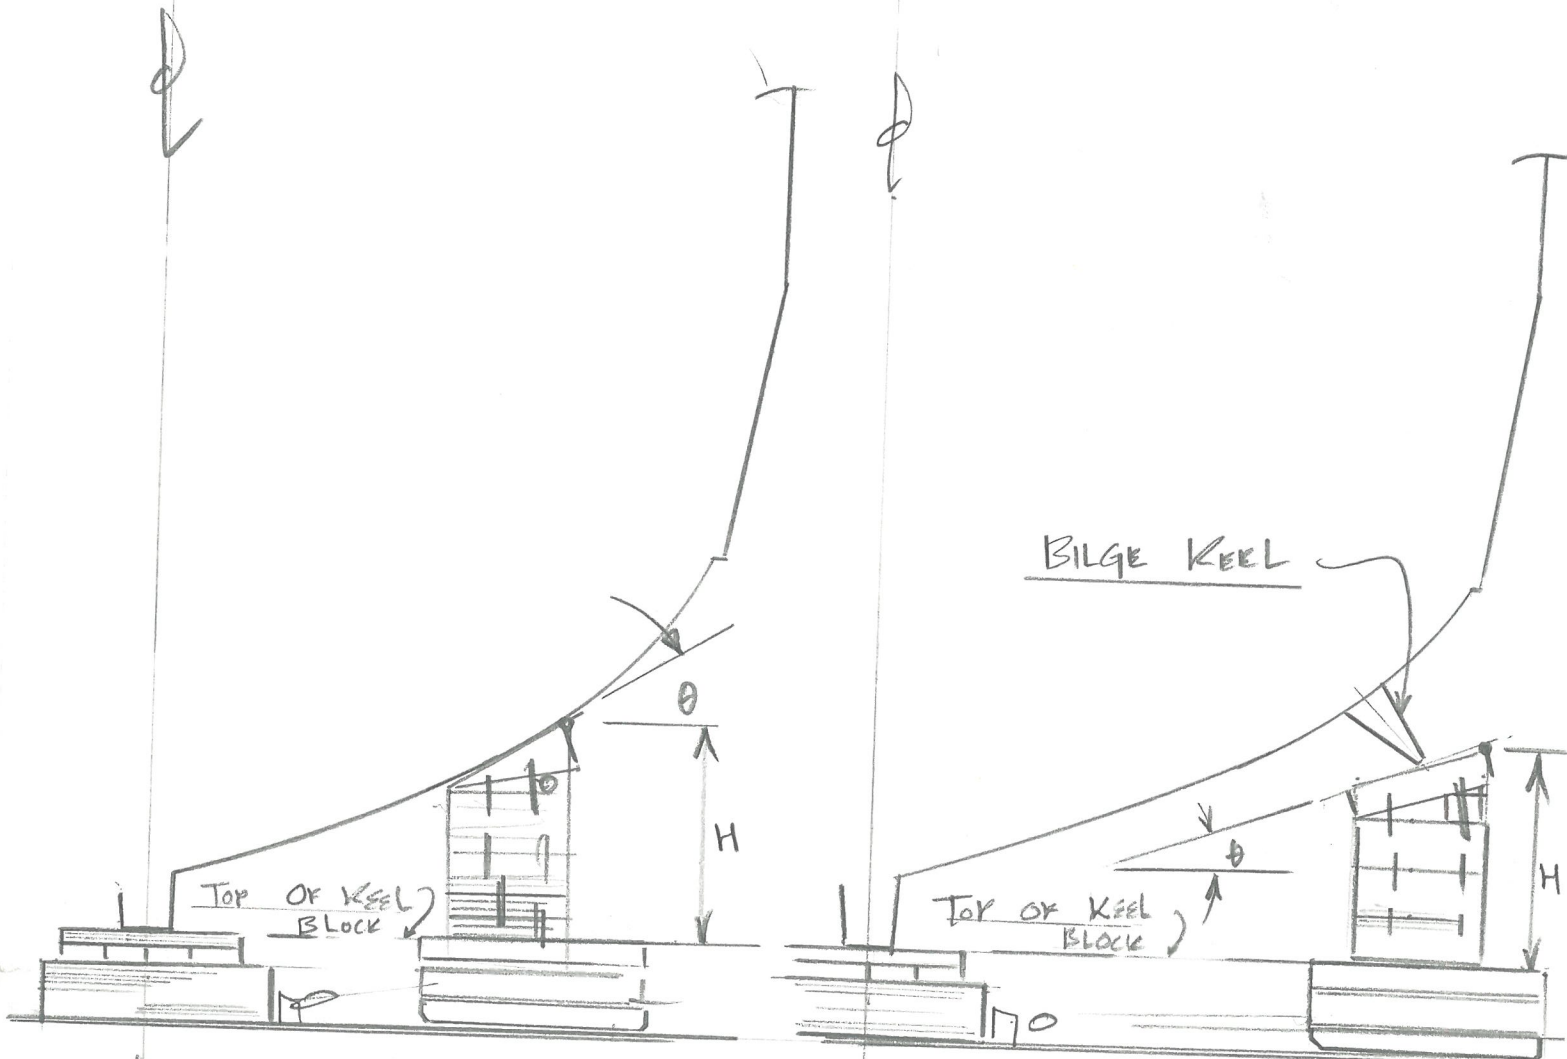

TYPICAL SECTION BILGE

BLOCKS (1), (3)

TYPICAL SECTION BILGE

BLOCK (2)

TYPICAL SECTIONS

REVISED 2 SEPT. 1992

BILGE BLOCK CONSTRUCTION

BLOCK #	H	θ	TIP
1	63" /	35° /	7° - HIGH SIDE FWD.
2	60"	26°	2° - HIGH SIDE AFT
3	75"	21°	7° - HIGH SIDE AFT