




JOB# 2004320

North Nord Stamp



GENERAL NOTES:

- COORDINATE ALL WORK WITH ELECTRICAL, MECHANICAL AND CIVIL DISCIPLINES.



0	ISSUED FOR TENDER	FEB 10 2021
revisions		date


project projet  
**NEW BOOSTER STATION ELECTRICAL ROOM**  
**WABUSH AIRPORT WABUSH, NL**


drawing dessin  
**STRUCTURAL RENOVATIONS PLAN, SECTION, DOOR AND WALL SCHEDULE**


designed JACQUES LEGERE	conçu
date FEBRUARY 10 2021	
drawn JACQUES LEGERE	dessiné
date FEBRUARY 10 2021	
approved CHRIS RUSHTON	approuvé
date FEBRUARY 10 2021	

Tender Soumission  
 PWSC Project Manager Administrateur de projets TPSGC  
 project number no. du projet  
**R.080992.002**  
 drawing no. no. du dessin

S01

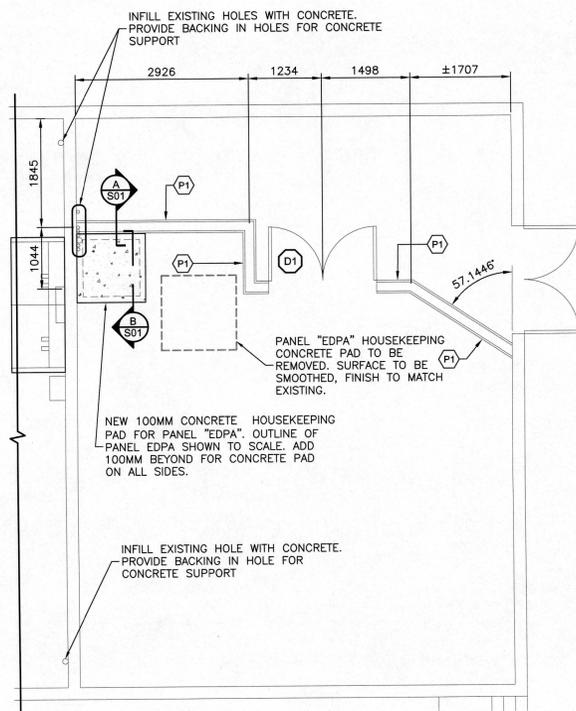


WALL TYPE ASSEMBLY SCHEDULE	
 <b>2 HR FIRE RATED WALL</b>	P1- S9d-STC 49, FRR 2hr
	-15.9 mm TYPE 'X' GYPSUM WALL BOARD
	-15.9 mm TYPE 'X' GYPSUM WALL BOARD
	-152X32 mm STEEL STUDS, 0.91mm THICK STUDS SPACED AT 400 mm O.C
	-15.9 mm TYPE 'X' GYPSUM WALL BOARD
	-15.9 mm TYPE 'X' GYPSUM WALL BOARD

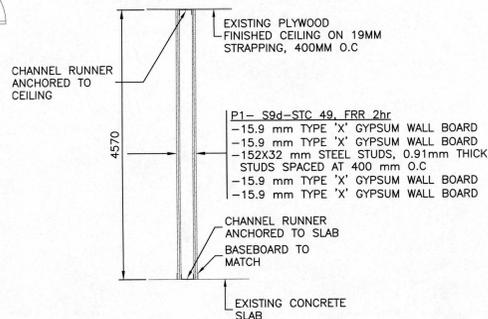


SECTION **A**  
 SCALE : N.T.S. **S01**

STRUCTURAL/NEW **1**  
 SCALE: 1:50 **S01**



DOOR SCHEDULE										
NO.	QUANTITY	SIZE			CONSTRUCTION		FRAME		RATING	REMARKS
		WIDTH	HEIGHT	THICK	CORE	MATERIAL	TYPE	MATERIAL		
<b>D1</b>	1	1828	2134	45	INSULATED	METAL	PRESSED	STEEL	2 HR	C/W ALL HARDWARE AND FIRE LABELING

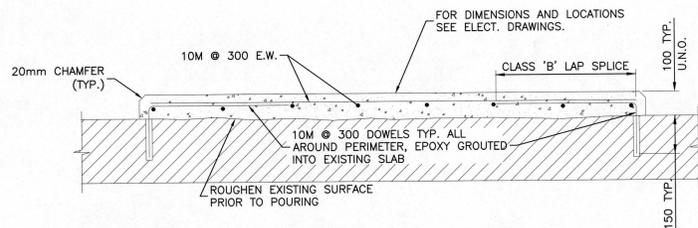

SECTION **B**  
 SCALE: 1:50 **S01**

