



RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

Bid Receiving Public Works and Government
Services Canada/Réception des soumissions Travaux
publics et Services gouvernementaux Canada
800 Burrard Street, Room 219
800, rue Burrard, pièce 219
Vancouver
British Columbia
V6Z 0B9
Bid Fax: (604) 775-9381

**SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise
indicated, all other terms and conditions of the Solicitation
remain the same.

Ce document est par la présente révisé; sauf indication contraire,
les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
Public Works and Government Services Canada - Pacific
Region
800 Burrard Street, Room 219
800, rue Burrard, pièce 219
Vancouver
British C
V6Z 0B9

Title - Sujet New Residence Nouvelle résidence	
Solicitation No. - N° de l'invitation EZ899-220930/A	Amendment No. - N° modif. 002
Client Reference No. - N° de référence du client	Date 2021-08-27
GETS Reference No. - N° de référence de SEAG PW-SPWY-031-9034	
File No. - N° de dossier PWY-1-44072 (031)	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM Pacific Daylight Saving Time PDT on - le 2021-09-09 Heure Avancée du Pacifique HAP	
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Leung, Janie	Buyer Id - Id de l'acheteur pwy031
Telephone No. - N° de téléphone (778) 919-3273 ()	FAX No. - N° de FAX () -
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: RCMP – New Residence – New Aiyansh, BC	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Solicitation No. - N° de l'invitation
EZ899-220930/A

Amd. No. - N° de la modif.
002

Buyer ID - Id de l'acheteur
PWY031

Client Ref. No. - N° de réf. du client

File No. - N° du dossier
PWY-1-44072

CCC No./N° CCC - FMS No./N° VME

This Amendment 002 is raised to extend the solicitation closing date and to issue Addendum #2.

Extension of Time for Tenderers

New Residence
New Aiyansh, BC
Solicitation No: EZ899-220930/A

Notice is hereby given that the time for reception of tenders previously due at **2:00 p.m. P.D.S.T. on 2 September 2021** is hereby extended to **2:00 p.m. P.D.S.T. on 9 September 2021**.

All other terms and conditions remain unchanged.

***The following changes in the Tender Documents are effective IMMEDIATELY.
This addendum will form part of the Contract Documents***

Amend/revise the Standard Contract Documents as follows:

1. QUESTIONS AND CLARIFICATIONS

Questions from bidders and responses as follows:

1. Question: Can we extend the bid closing for an additional week?

Response: Yes, the bid closing will be extended to September 09, 2021

2. Question: Has a Geotechnical Report been completed?

Response: Yes, the geotechnical reports have been included in the appendix of the specification.

3. Clarification: Is there a perimeter drain system?

Response: Yes, see construction drawings.

4. Clarification: Do the downspouts connect to the perimeter drain system?

Response: Yes, downspouts are to be connected to perimeter drain.

5. Clarification: Is there a drainage tie-in to the perimeter drain from the window well(s)?

Response: Yes, provide tie-in to perimeter drain. See comments for Architectural Drawing A07 - this addendum.

6. Clarification: Are exterior window trims constructed of wood?

Response: Yes, exterior window trims are to be constructed of wood see specification section 06 20 00 (2.1.2).

7. Clarification: Roof sheathing on the carport is 16mm and the main house is only 12.5 mm on S-2.02, which is correct?

Response: Sheathing thickness is correct as indicated on drawings. 16mm sheathing on the carport & 12.5mm on the main house.

8. Clarification: The roof joists are 89x286 over the patio on structural and architectural show 38x286. Please advise.

Response: Provide 89x286 wood framing as per the structural drawings. Delete all notes on Architectural drawing referring to wood framing at south canopy See comments for Architectural Drawing A05 - this addendum.

9. Clarification: Structural also shows a pair of 65x286 on each side of each post only. How is the exterior drywall to be installed that is shown on architectural?

Response: The exterior gypsum board is to be fastened to the underside of the roof joists. See comments for Architectural Drawing A05 and attached SK-01.

10. Clarification: Please confirm the sprinkler code for this project. The specification for this project states NFPA13R for the sprinkler code compliance. However, a house like this typically falls under NFPA13D. 13D allows for a much simpler system, especially if the water supply is poor and forces the use of a tank and pump system, which would be very difficult to do if designing to 13R.

Response: See the attached Mechanical Addendum 02.

2. ARCHITECTURAL DRAWINGS

A03 FLOOR PLAN

REVISE ROOF-TYPE DESIGNATION

At Roof-Type designation R3, delete 'asphalt roll-roofing'. Revised drawing to indicate roofing to be asphalt shingle per specification.

A05 DETAILS

REVISE DETAIL 1/A05

1. Delete all notes on 1/A05 referring to wood framing at south canopy. Refer to Structural drawings for all canopy framing information. See attachment ASK-1 – this addendum.
2. Revise extents of exterior gypsum attached to underside of canopy rafters. See attachment ASK-1 – this addendum.

A07 DETAILS

REVISE DETAIL 1/A07

Revised drawing to indicate perforated 150 mm schedule 30 pvc pipe connected to perimeter drain at footing.

A08 DETAILS

REVISE DETAIL 1/A08

Delete 'roofing membrane'. Revised drawing to indicate roofing to be asphalt shingle per specification.

4. ATTACHMENTS

1. Mechanical Addendum 02
2. Architectural Sketches ASK-01

End of Addendum 02



ADDENDUM

Project:	RCMP Employee Housing New Aiyanish		
Project No.:	211-02781-00	Addendum No.:	M01
Contract No.:		Date:	August 26, 2021
Distribution:			

GENERAL

This Addendum forms part of the Contract Documents for the above Project and amends the original drawings and Specifications. The following revisions supersede the information contained in the original drawings and Specifications issued to the extent referenced and shall become part thereof. No adjustment to the Contract Price will be considered or allowed due to the Contractor or to any Sub-Contractor or Supplier not being familiar with this Addendum.

1.0 SPECIFICATION

1.1 DELETE – THE FOLLOWING SPECIFICATION SECTIONS

1. 21 0505 Common Work Results for Fire Suppression
2. 21 1313 Wet Pipe Sprinkler Systems

2.0 DRAWINGS

2.1 DRAWING M1.1 (no sketch or drawing attached)

- 1 DELETE – RPBA and Wet Zone Manifold.
- 2 DELETE – 25 Wet Pipe for the sprinkler system at gridline B+/3a, as the fire suppression system is no longer required.
- 3 DELETE – No requirement for fire protection drawing notes, as the fire suppression system is no longer required.

2.2 DRAWING M3.0 (no sketch or drawing attached)


- 1 DELETE – Remove fire suppression system pipe and note “TO SPRINKLERS REFER TO DETAIL 15/M3.0” from detail 6/M3.0.
- 2 DELETE – Remove detail 15 and 16 on drawing M3.0, as the fire suppression system is no longer required.

END OF MECHANICAL ADDENDUM


Suite 301, 3600 Uptown Boulevard
Victoria, BC, Canada V8Z 0B9

T: +1 250 386-2844
www.wsp.com

\\Corp.Pbwan.Net\Ca\CAVIC500\CAVIC1DAT01\Vic1\Projects_Secured\211-02781-00 RCMP Employee Housing New Aiyanish\14.0 Tech_Prof Services\14.40_Mech\06_Docs\7_Tender Docs\211-02781-00_Add_Ntag_20210827_Ch_V1-ADD-M01_FP_Scope_Removal.Docx

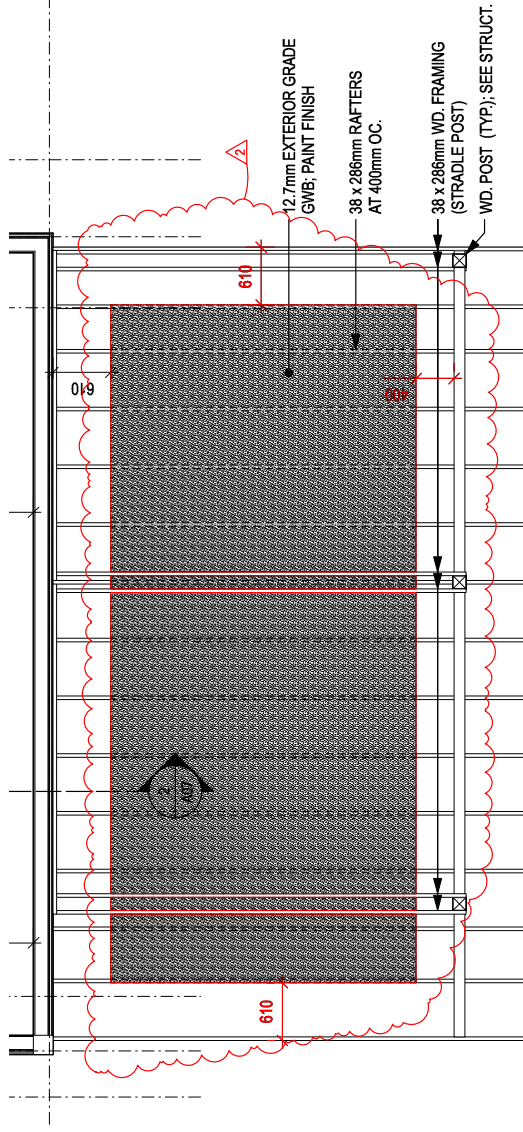

1 PARTIAL RCP
SK-01 SCALE: 1:50

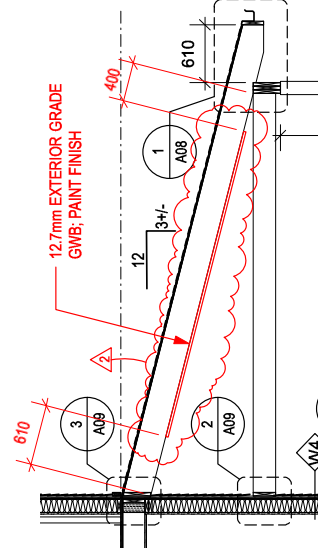

2 PARTIAL BUILDING SECTION
SK-01 SCALE: 1:50

New Residence, New Aiyansh, BC. | Addendum #2