

SMALL CRAFT HARBOURS




0	ISSUED FOR TENDER	10/05/21
A	ISSUED FOR REVIEW	13/02/20

WHARF RECONSTRUCTION
TROUT RIVER, NL.

SITE PLAN –
DEMOLITION LAYOUT

designed	K. NEIL	concu
date	APRIL 2021	
drawn	K. NEIL	dessin
date	APRIL 2021	
approved		approuvé
date		
Tender	Paul Curran	Submission
DFO Project Manager		
project number	723199	no. du projet
drawing no.	E1	no. du dessin

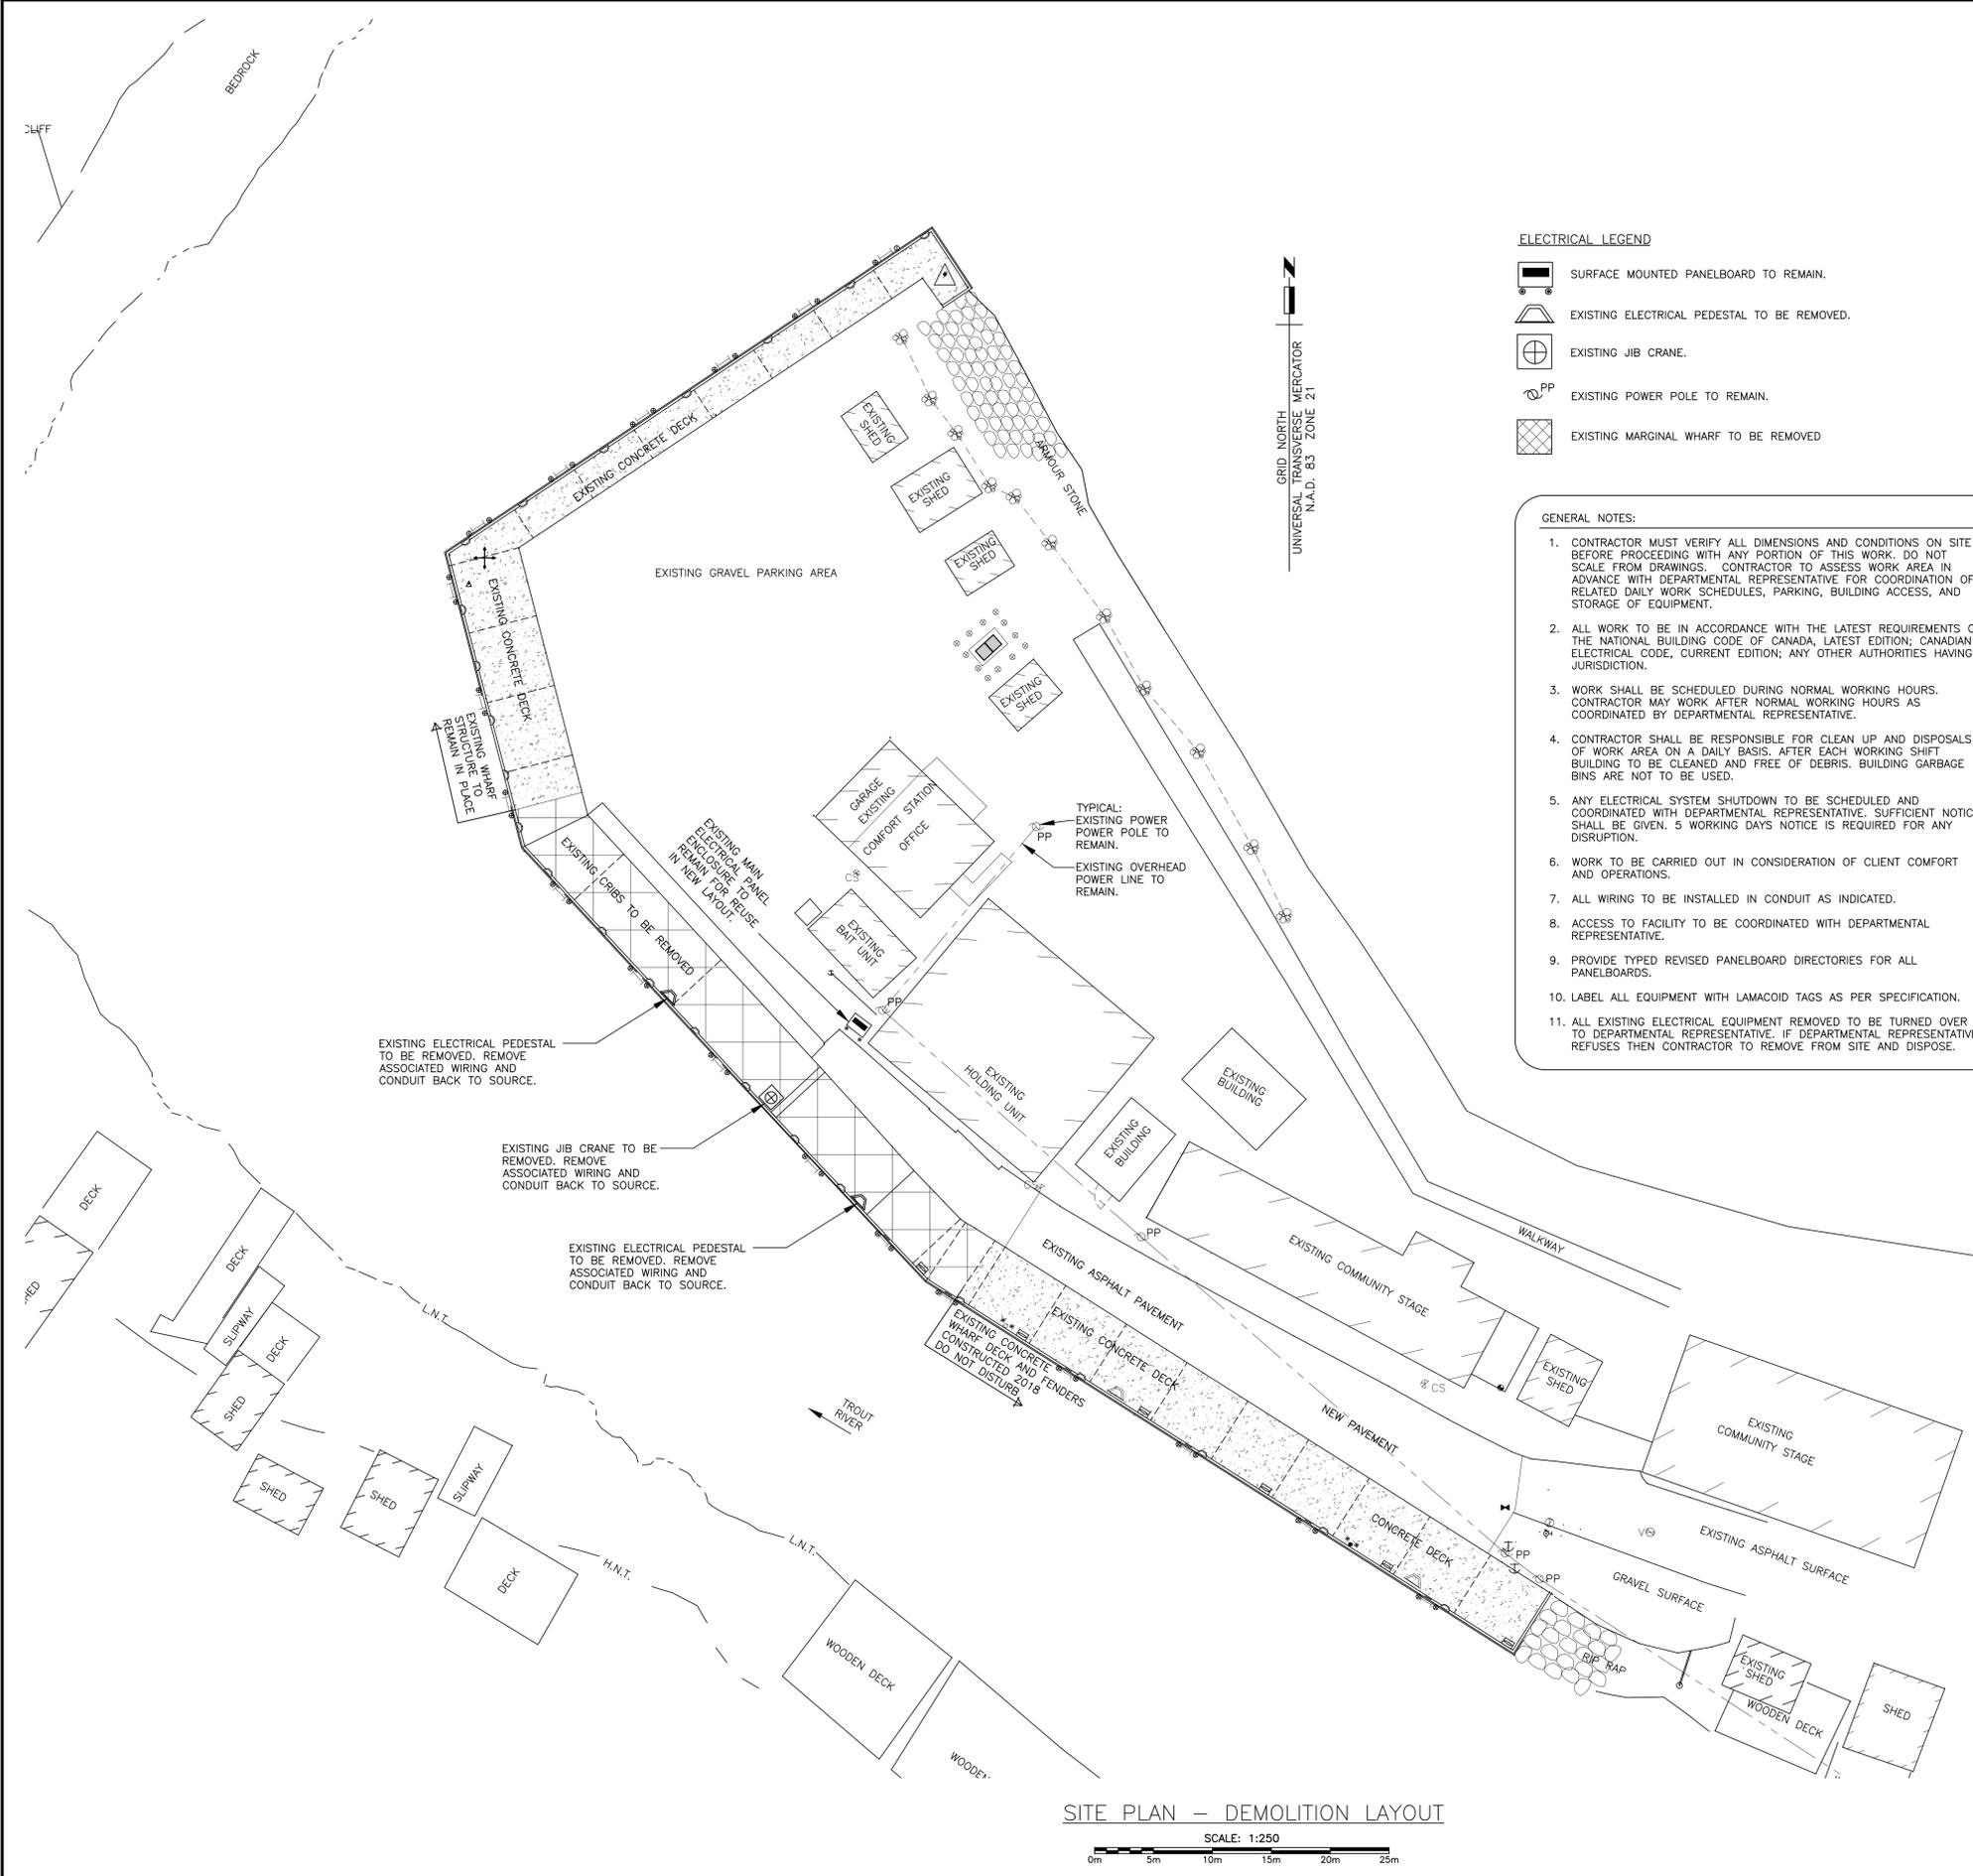

- ELECTRICAL LEGEND**
- SURFACE MOUNTED PANELBOARD TO REMAIN.
 - EXISTING ELECTRICAL PEDESTAL TO BE REMOVED.
 - EXISTING JIB CRANE.
 - EXISTING POWER POLE TO REMAIN.
 - EXISTING MARGINAL WHARF TO BE REMOVED.

- GENERAL NOTES:**
1. CONTRACTOR MUST VERIFY ALL DIMENSIONS AND CONDITIONS ON SITE BEFORE PROCEEDING WITH ANY PORTION OF THIS WORK. DO NOT SCALE FROM DRAWINGS. CONTRACTOR TO ASSESS WORK AREA IN ADVANCE WITH DEPARTMENTAL REPRESENTATIVE FOR COORDINATION OF RELATED DAILY WORK SCHEDULES, PARKING, BUILDING ACCESS, AND STORAGE OF EQUIPMENT.
 2. ALL WORK TO BE IN ACCORDANCE WITH THE LATEST REQUIREMENTS OF: THE NATIONAL BUILDING CODE OF CANADA, LATEST EDITION; CANADIAN ELECTRICAL CODE, CURRENT EDITION; ANY OTHER AUTHORITIES HAVING JURISDICTION.
 3. WORK SHALL BE SCHEDULED DURING NORMAL WORKING HOURS. CONTRACTOR MAY WORK AFTER NORMAL WORKING HOURS AS COORDINATED BY DEPARTMENTAL REPRESENTATIVE.
 4. CONTRACTOR SHALL BE RESPONSIBLE FOR CLEAN UP AND DISPOSALS OF WORK AREA ON A DAILY BASIS. AFTER EACH WORKING SHIFT BUILDING TO BE CLEANED AND FREE OF DEBRIS. BUILDING GARBAGE BINS ARE NOT TO BE USED.
 5. ANY ELECTRICAL SYSTEM SHUTDOWN TO BE SCHEDULED AND COORDINATED WITH DEPARTMENTAL REPRESENTATIVE. SUFFICIENT NOTICE SHALL BE GIVEN. 5 WORKING DAYS NOTICE IS REQUIRED FOR ANY DISRUPTION.
 6. WORK TO BE CARRIED OUT IN CONSIDERATION OF CLIENT COMFORT AND OPERATIONS.
 7. ALL WIRING TO BE INSTALLED IN CONDUIT AS INDICATED.
 8. ACCESS TO FACILITY TO BE COORDINATED WITH DEPARTMENTAL REPRESENTATIVE.
 9. PROVIDE TYPED REVISED PANELBOARD DIRECTORIES FOR ALL PANELBOARDS.
 10. LABEL ALL EQUIPMENT WITH LAMACOID TAGS AS PER SPECIFICATION.
 11. ALL EXISTING ELECTRICAL EQUIPMENT REMOVED TO BE TURNED OVER TO DEPARTMENTAL REPRESENTATIVE. IF DEPARTMENTAL REPRESENTATIVE REFUSES THEN CONTRACTOR TO REMOVE FROM SITE AND DISPOSE.