
02

Transport & Delivery

Correct Transportation

DELIVERY and TRANSPORTATION CONDITIONS

The product is delivered with covers and panels already mounted and fully crated. There is an opening at the base of the crate where the forks can pass through.




IMPORTANT

Always use 4-6 ft forks or extenders!



Avoid high speeds and abrupt braking

DO'S and DON'TS



Correct Transportation


SPECIFICATIONS and DIMENSIONS

Total product height
(including crate).....105.5 in. (2680 mm)


Total product weight
(including crate) 1,962 lb (890 kg)

- Product should be treated as **FRAGILE**
- Use forklift holes to lift product on/off truck
- Strap the crate down over the top and through the feet and secure with winches
- Face the PV Panels toward the front or back of the truck, if possible
- A crane can be used in place of a forklift

CRATE DIMENSIONS (mm)

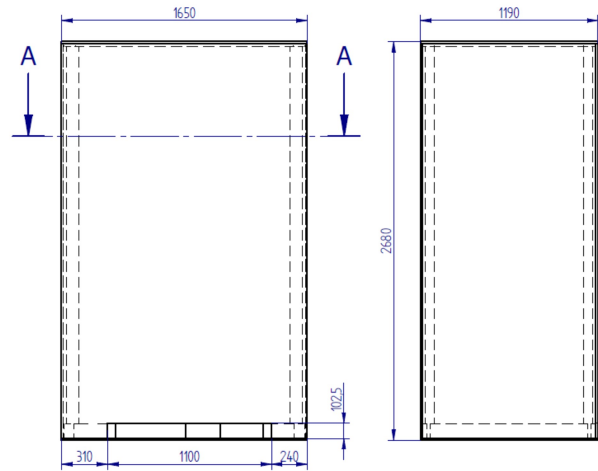

EXAMPLES

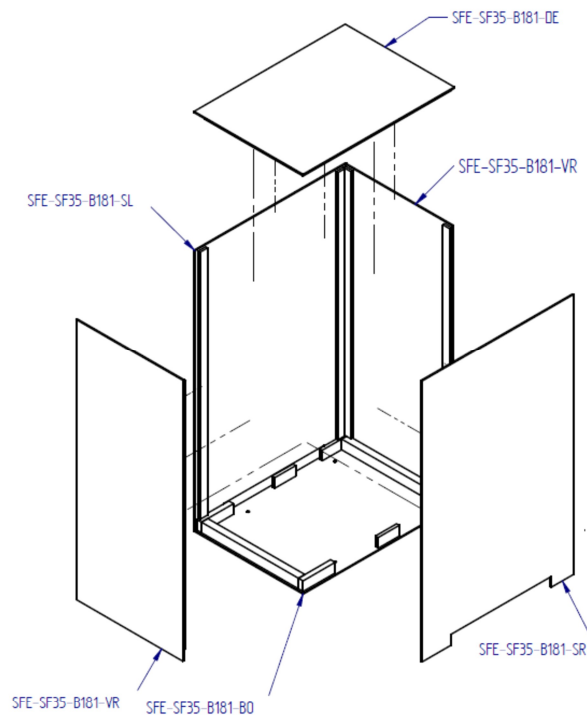

Unloading & Uncrating

Use a forklift to unload the unit
(with 4-6 ft forks!!)



***PLEASE STORE INDOORS WITH
TEMP ABOVE 0C***

