

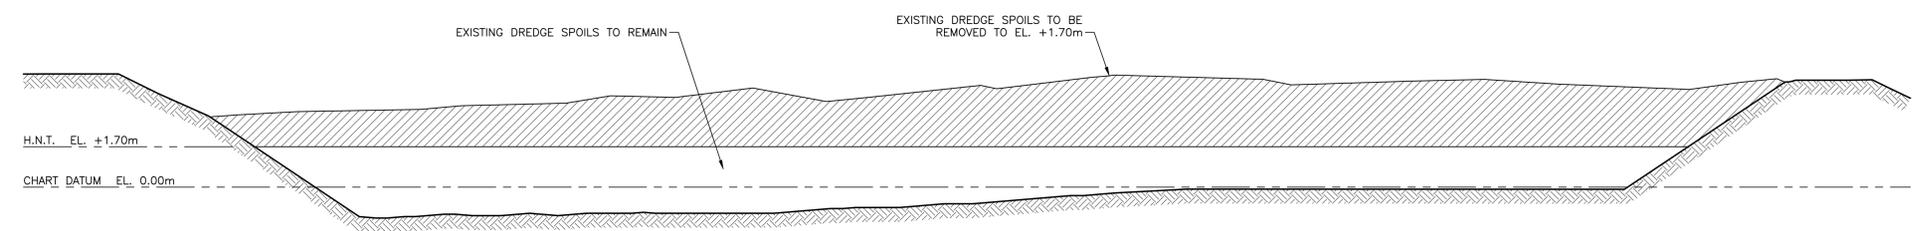


- GENERAL NOTES**
- SOUNDINGS FOR THIS SURVEY WERE CARRIED OUT DECEMBER 17, 2021 BY PUBLIC WORKS AND GOVERNMENT SERVICES CANADA CREW. SOUNDINGS VALID ONLY ON DATE TAKEN. TOPOGRAPHIC ELEVATIONS FOR THIS SURVEY WERE CARRIED OUT DECEMBER 16, 2021 BY PUBLIC WORKS AND GOVERNMENT SERVICES CANADA CREW. ELEVATIONS VALID ONLY ON DATE TAKEN.
 - THE TEMPORARY BENCHMARK, TBM#2 IS LOCATED AT TOP OF GUARD WHERE SHOWN ON SITE PLAN (REFER TO SHEET 3); HAS AN ELEVATION OF 3.16 METRES ABOVE CHART DATUM. SOUNDINGS ARE REFERENCED TO C.H.S. BENCH MARK No. 6232-1975 (DESTROYED) AND HAS AN ELEVATION OF 2.99 METRES ABOVE CHART DATUM.
 - GRID NORTH REFERS TO U.T.M. COORDINATES, N.A.D. 83, ZONE 20.
 - SOUNDINGS AND ELEVATIONS ARE IN METRES AND DECIMALS.
 - WORK UNDER THIS CONTRACT CONSISTS OF, BUT IS NOT LIMITED TO:
 - a) REMOVAL OF EXISTING DREDGE SPOILS FROM ON-SITE CONTAINMENT CELL AND DISPOSAL AT THE OFF-SITE DESIGNATED DISPOSAL SITE.
 - b) CLASS "B" DREDGING OF BASIN AREA TO 2.0 METRES BELOW CHART DATUM, OR UNTIL HARD BOTTOM IS REACHED, WHICHEVER HAPPENS FIRST.
 - c) CLASS "B" DREDGING OF CHANNEL AREAS "A" AND "B" TO 1.40 METRES BELOW CHART DATUM OR UNTIL HARD BOTTOM IS REACHED, WHICHEVER HAPPENS FIRST.
 - NO DREDGING IS TO BE CARRIED OUT WITHIN 1.50 METRES OF ANY STRUCTURE, UNLESS NOTED OTHERWISE.
 - DREDGE SIDE SLOPES AT 1 VERTICAL TO 2.0 HORIZONTAL.
 - THE CONTRACTOR IS TO TAKE APPROPRIATE MEASURES TO PROTECT THE EXISTING STRUCTURES FROM DAMAGE RESULTING FROM DREDGING OPERATIONS. ANY DAMAGED MEMBERS SHALL BE REPLACED BY THE CONTRACTOR AT NO ADDITIONAL COST.
 - CHART DATUM IS, BY INTERNATIONAL AGREEMENT, A PLANE BELOW WHICH THE TIDE WILL SELDOM FALL. THE CANADIAN HYDROGRAPHIC SERVICE HAS ADOPTED THE PLANE OF LOWEST NORMAL TIDE (L.N.T.) AS CHART DATUM. AS THE RISE, FALL AND RANGE OF TIDES VARIES DAILY, THE CANADIAN TIDE AND CURRENT TABLES, AS ISSUED BY THE CANADIAN HYDROGRAPHIC SERVICE, SHOULD BE CONSULTED FOR TIDAL PREDICTIONS AND OTHER TIDAL INFORMATION RELATING TO WORK.

ON-SITE CONTAINMENT CELL PLAN
SCALE : 1:400

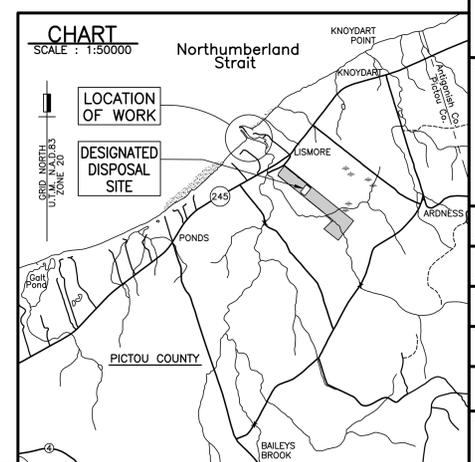

EXISTING CONTAINMENT CELL SECTION
SCALE : 1:125



0	ISSUED FOR TENDER	DEC 20 2021
revisions		date
project	project	
BASIN DREDGING BAILEYS BROOK (LISMORE) PICTOU COUNTY NOVA SCOTIA		
drawing	dessin	
ON-SITE CONTAINMENT CELL PLAN AND SECTION		
designed	D. MORTON	conçu
date	JULY 2021	
drawn	G. PROSPER	dessiné
date	JULY 2021	
approved		approuvé
date		
Tender	Soumission	
PWGSC Project Manager / Administrateur de projets TPSGC		
project number	no. du projet	
R.117892.001		
drawing no.	no. du dessin	
SHT 1		