



RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

**Bid Receiving - PWGSC / Réception des soumissions -
TPSGC**

**See herein for bid submission
instructions/**

**Voir la présente pour les
instructions sur la présentation
d'une soumission**

NA

British Columbia

NA

**SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise
indicated, all other terms and conditions of the Solicitation
remain the same.

Ce document est par la présente révisé; sauf indication contraire,
les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address

**Raison sociale et adresse du
fournisseur/de l'entrepreneur**

Issuing Office - Bureau de distribution

Public Works and Government Services Canada - Pacific
Region
800 Burrard Street, Room 219
800, rue Burrard, pièce 219
Vancouver
British C
V6Z 0B9

Title - Sujet Steveston Paramount Wharf 403 Recon Reconstruction du quai 403 de Steveston Paramount	
Solicitation No. - N° de l'invitation F1571-210984/A	Amendment No. - N° modif. 003
Client Reference No. - N° de référence du client F1571-210984	Date 2022-01-11
GETS Reference No. - N° de référence de SEAG PW-\$PWY-028-9095	
File No. - N° de dossier PWY-1-44142 (028)	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM Pacific Standard Time PST on - le 2022-01-25 Heure Normale du Pacifique HNP	
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Lam (PWY), Tian	Buyer Id - Id de l'acheteur pwy028
Telephone No. - N° de téléphone (604) 363-7968 ()	FAX No. - N° de FAX () -
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: DFO – Steveston Paramount Wharf 403 – Richmond, BC	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Solicitation No. - N° de l'invitation
F1571-210984/A

Amd. No. - N° de la modif.
003

Buyer ID - Id de l'acheteur
pwy028

Client Ref. No. - N° de réf. du client

File No. - N° du dossier CCC No./N°

CCC - FMS No./N° VME

The Solicitation Amendment 003 is raised to issue Addendum 002.

See Addendum 002 herein.

All other terms and conditions remain unchanged.

Solicitation No. - N° de l'invitation
F1571-210984/A

Amd. No. - N° de la modif.
003

Buyer ID - Id de l'acheteur
pwy028

Client Ref. No. - N° de réf. du client

File No. - N° du dossier CCC No./N°

CCC - FMS No./N° VME

BID AND ACCEPTANCE FORM (BA) – REVISED DECEMBER 7, 2021

BA01 IDENTIFICATION

Steveston Paramount Building 25 Demolition
Richmond, BC

BA02 LEGAL NAME AND ADDRESS OF BIDDER

Legal Name:					
Operating Name (if any):					
Address:					
Telephone:		Fax:		PBN:	
E-mail address:					
Contract Security Program Organisation Number (when required)					

BA03 THE OFFER

The Bidder offers to Canada to perform and complete the Work for the above named project in accordance with the Bid Documents for the **TOTAL BID AMOUNT INDICATED IN APPENDIX 1.**

BA04 BID VALIDITY PERIOD

The bid must not be withdrawn for a period of 30 days following the date of solicitation closing.

BA05 ACCEPTANCE AND CONTRACT

Upon acceptance of the Bidder's offer by Canada, a binding Contract will be formed between Canada and the Bidder. The documents forming the Contract will be the Contract Documents identified in "Contract Documents (CD)" section.

BA06 CONSTRUCTION TIME

The Contractor must perform and complete the Work before **May 31, 2022.**

BA07 BID SECURITY

The Bidder must enclose bid security with its bid in accordance with GI08 - Bid Security Requirements of R2710T - General Instructions - Construction Services - Bid Security Requirements.

BA08 SIGNATURE

--

Name and title of person authorized to sign on behalf of Bidder (Type or print)

--

Signature

--

Date

The following changes in the tender documents are effective immediately. This Addendum will form part of the contract documents.
--

Addendum 02

Section 01 11 00 Clause 1.6 Work Exclusion (Outside scope of work), ADD

“.5 Demolition and disposal of timber decking within the footprint of building 25 by Others. Footprint of building 25 is approximate 1,511.19 square meter. The removal of building 25 and its associated decking will be completed and will be fenced off by others prior to July 2022. The remaining substructure within the footprint of building 25 to be included in the tendered “Structure Demolition – Timber Wharf 403”. The demolition of timber decking and substructure outside the footprint of building 25 to included in the tendered “Structure Demolition – Timber Wharf 403”.”

Questions and Answers

Q1. Please confirm if all timber components of the existing dock are creosote treated.

A1: Yes, all timber components of the existing dock are creosote treated with the exception of the wharf decking which is ACZA pressure treated.

Q2. Will DFO be responsible for obtaining any required environmental permits for the project?

A2: The owner is responsible for the project's Fisheries Act Authorization. The contractor is responsible for all other permit required if any as per section 01 13 00 clause 1.7.

Q3. Please confirm the extent of work required under "Marine Crew and Equipment". Which float piles are anticipated requiring to be moved?

A3. Extent of work is listed in section 01 11 00 clause 1.5.10. Float X and Float W are anticipated to be moved and will be measured as per tendered “marine crew and equipment”.

Q4. Please confirm the location and extent of laydown area.

A4. Maintain 2 way traffic around building 24A and maintain access to the travel lift pier. Refer markup below. Contractor to submit propose lay down area for approval prior to mobilization.



Q5. - 2.7m x 51.8m Timber Float

This float appears on dwg 003 but not 002. Please confirm its presence and if it is to be relocated.

A5. That float is currently not there. It's for future installation and is not included in this tendered scope of work.

Q6. Relocation of Existing Timber Float "X"

Please confirm if the costs of relocating timber float "X" is to be carried in the 40 hrs under "Marine Crew and Equipment"?

A6. Yes.

Q7. - EZ18 Sheet Pile

Please confirm the EZ sheet pile is ESZ.

A7. The sheets supplied by owner are hot rolled with Larsson interlock with width 630mm, height(depth) 375mm and pile weight of 76kg/m.

Q8. - Waler Splice Spacing

Please confirm the centre to centre spacing of the splices, 30' seems reasonable.

A8. Spacing of splices at Contractor's discretion provided that the splices are located as per "typical waler splice" detail in drawing sheet 012.

Q9. - Fish Plates

Please confirm each waler splice, comprised of 2 - C380x60 channels will require only 2 (not 4) fish plates.


A9. – 2 fish plates per waler splice.

Q10. - Railing

Please confirm the extent of handrail required.

A10. Refer to Drawing sheet 013.

Q11. For the specification of the Rock Fill is there any way they could move the top size to 200mm there will be a significant savings as this is standard sizing. To produce to 150mm will definitely come at a higher price. Proposed alternate sieve analysis curve shown below for reference.

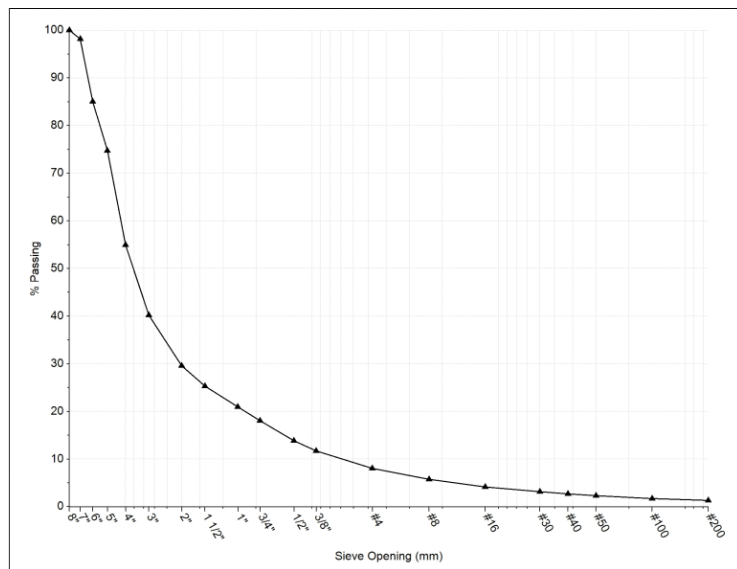

A11. Alternate rock supply proposed is acceptable. Gravel fill must be well graded as per specification 31 22 20.

Q12. Please confirm the length of the 11 paired sheet piling shown in appendix B - owner supplied materials, and that they are, or meet the minimum requirement of (AZ 19 - 700), and are supplied by the owner.

A12. Owner supplied sheets are 60ft long. They are able to interlock with AZ 19-700. Refer to A7 of this addendum for physical dimensions.

----End of Addendum----