


GRID NORTH  
UNIVERSAL TRANSVERSE MERCATOR  
N.A.D. 83 ZONE 20

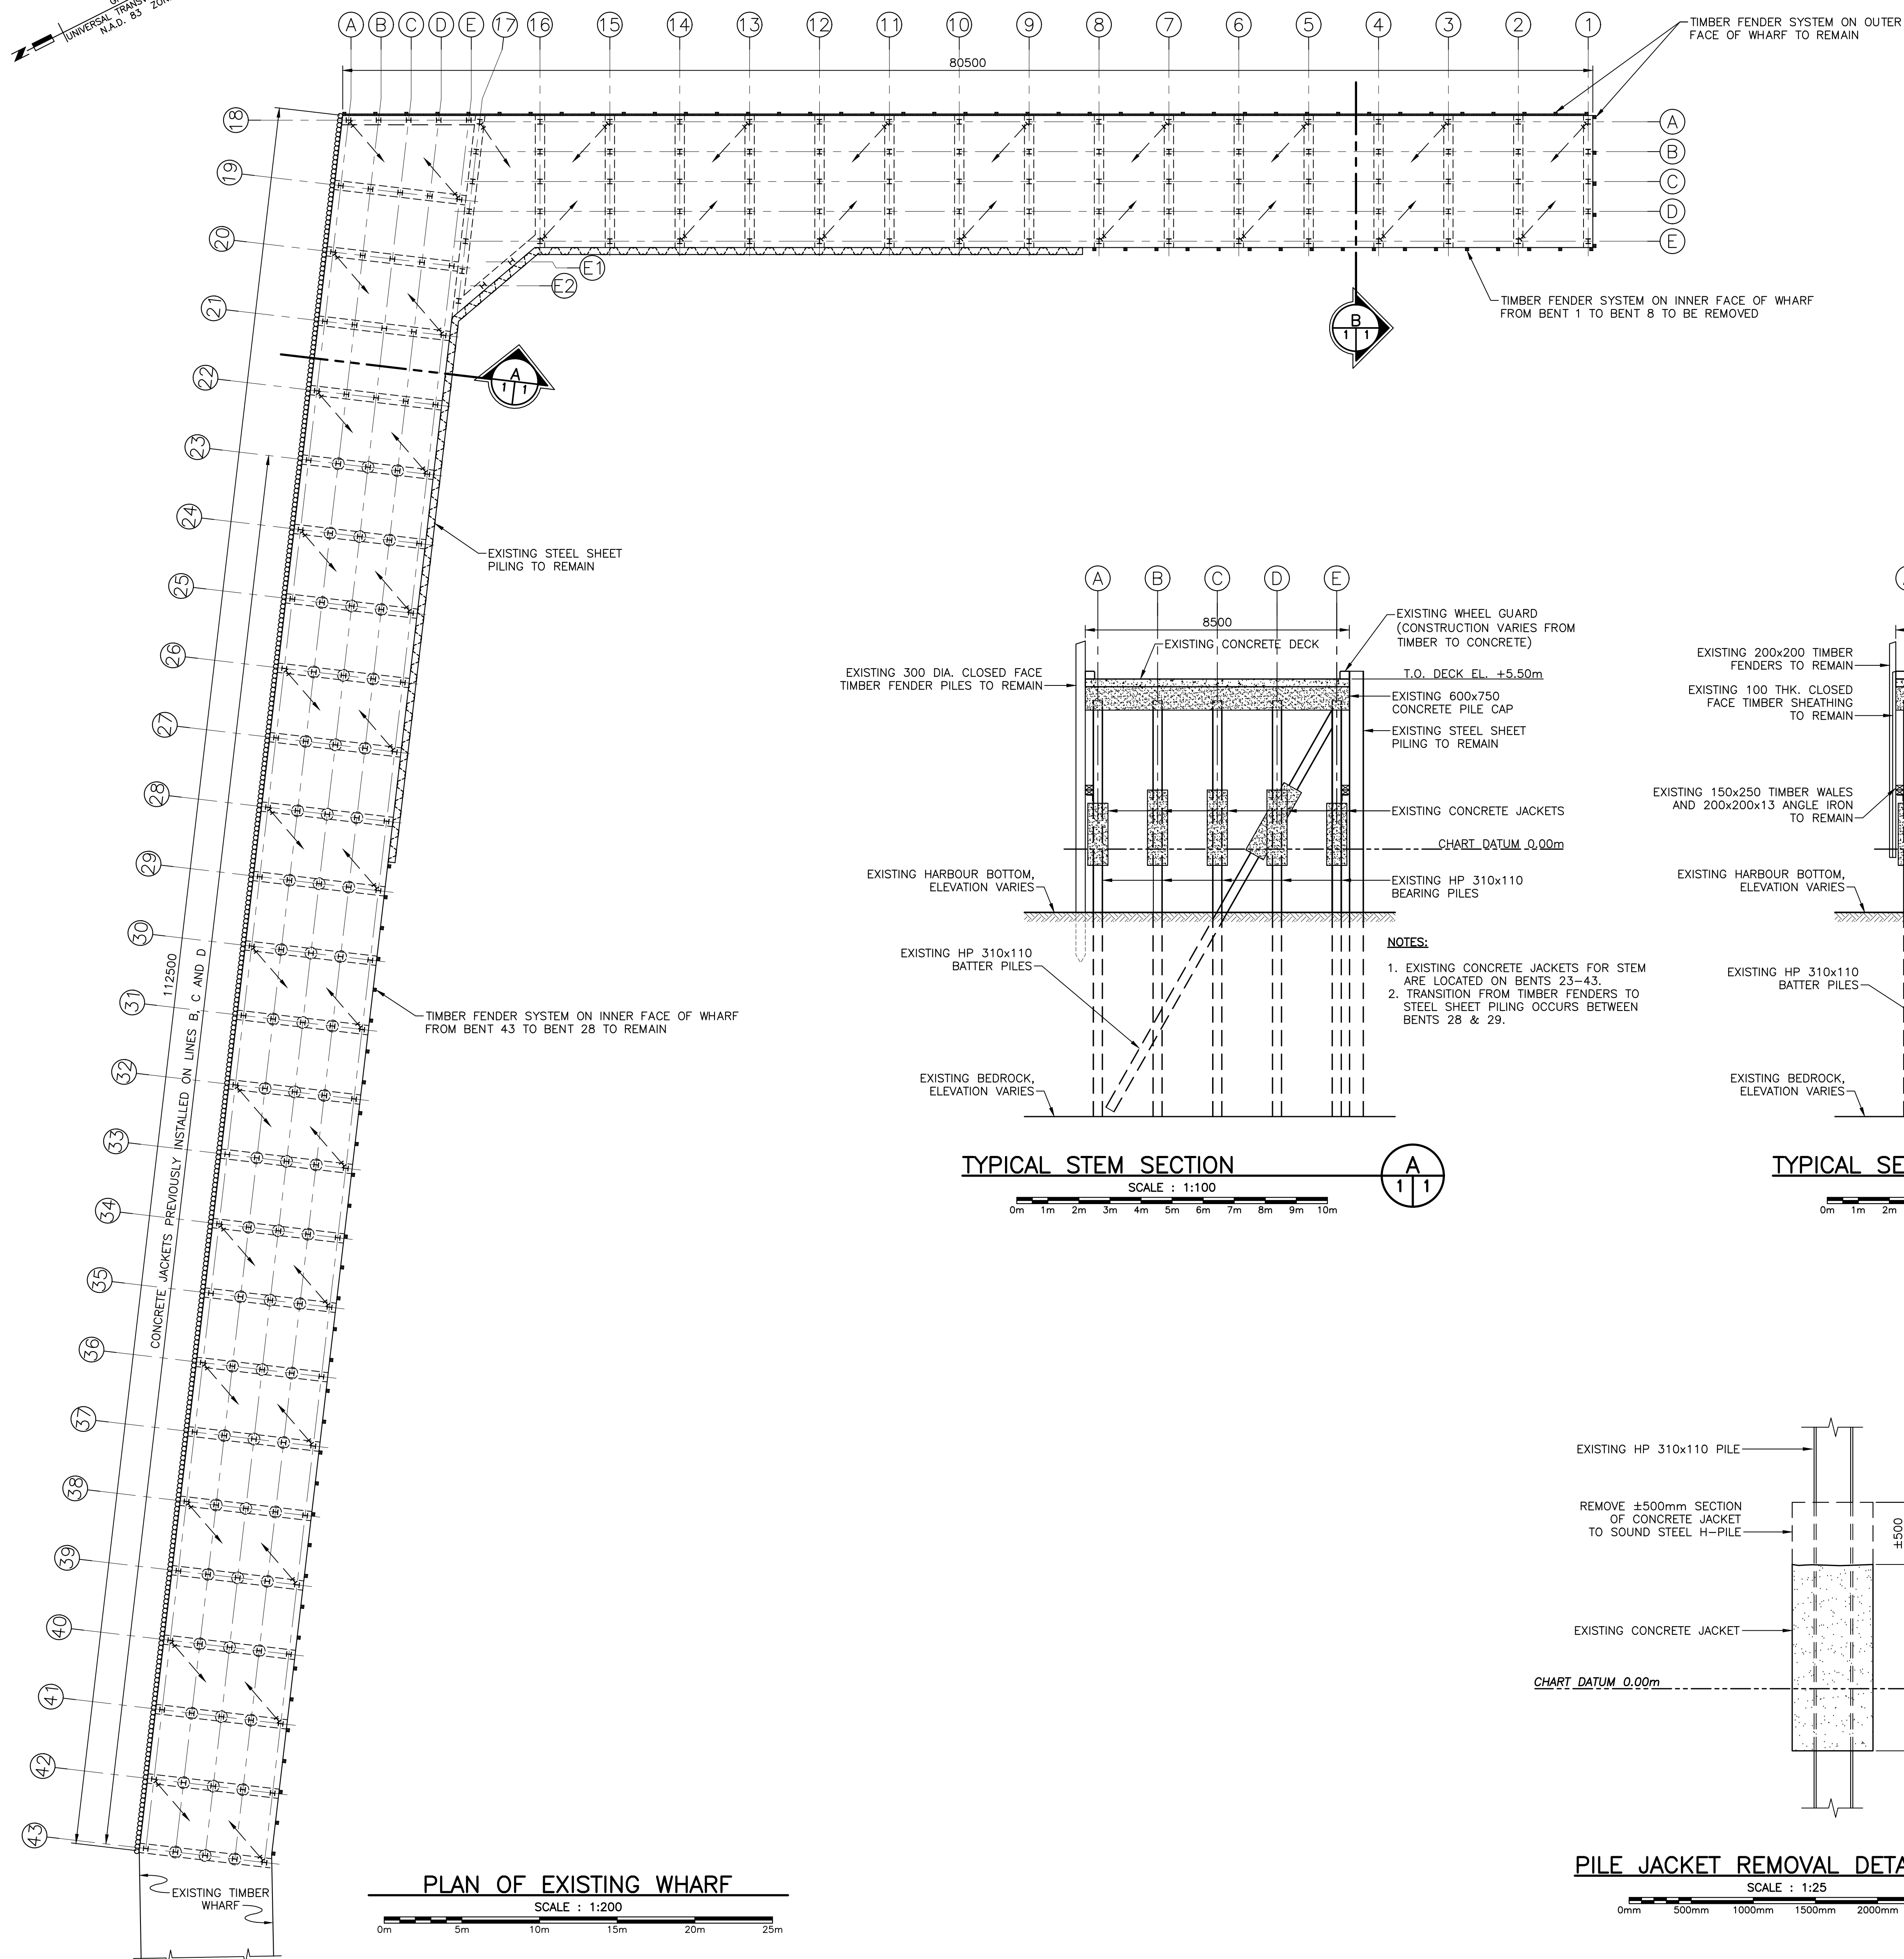

#### GENERAL NOTES

- EXISTING HORIZONTAL PILE LOCATIONS AND VERTICAL ALIGNMENTS SHOWN ARE APPROXIMATE AND MAY VARY.
- REPAIRS DETAILED IN THIS DRAWING SET INCLUDING DEMOLITION AND NEW CONSTRUCTION LIMITS MAY VARY BASED ON CHANGES IN ACTUAL PILE POSITION AND ALIGNMENT.
- SUBMIT ANY MODIFICATIONS TO STANDARD DETAILS SHOWN REQUIRED TO ACCOMMODATE ACTUAL PILE LOCATIONS AND ALIGNMENTS TO DEPARTMENTAL REPRESENTATIVE FOR REVIEW PRIOR TO COMPLETING WORK.
- EXISTING RECORD DRAWINGS AND GEOTECHNICAL SITE INFORMATION HAS BEEN APPENDED TO THE PROJECT SPECIFICATIONS.

- NOTES:**
- TRANSITION FROM STEEL SHEET PILING TO TIMBER FENDERS OCCURS BETWEEN BENTS 8 & 9.
  - FOR REMOVALS TO ACCOMMODATE NEW WORK, SEE DETAIL 11.

#### NOTES:

- VERTICAL PILE SHOWN, REMOVALS ON EXISTING BATTER PILE JACKETS SIMILAR.
- REMOVE EXISTING PORTION OF CONCRETE JACKET  $\pm 500$ mm TO SOUND STEEL. CUT OFF ANY EXISTING REINFORCING THAT WOULD BE PROTRUDING FROM EXISTING CONCRETE TO BE LEFT IN PLACE. CLEAN ANY LOOSE STEEL OR CONCRETE FROM HP310 PILE PRIOR TO POURING NEW ENCASUREMENT JACKET.

0	ISSUED FOR TENDER	OCT.15 2021
revisions		date
project	STEEL PILE REPAIRS PHASE 2 WEDGE POINT YARMOUTH COUNTY NOVA SCOTIA	
drawing	desain	

#### EXISTING CONDITIONS AND REMOVALS

designed	M. HIMMELMAN	conçu
date	SEPTEMBER 2021	
drawn	G. PROSPER	dessiné
date	SEPTEMBER 2021	
approved		approuvé
date		
Tender		Soumission
PWGS Project Manager	Administrateur de projets TP50C	
project number		no. du projet
	R.118209.001	
drawing no.		no. du dessin
	SHT 1	