


PARTIAL MEZZANINE LEVEL FLOOR PLAN - DEMOLITION LAYOUT

SCALE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

- DEMOLITION NOTES:**
- 1 REMOVE ALL PLUMBING FIXTURES ON THIS FLOOR. CONTRACTOR TO COORDINATE WITH DEPARTMENTAL REPRESENTATIVE REGARDING DISPOSAL OF PLUMBING FIXTURES.
 - 2 REMOVE ALL HYDRONIC HEATERS, VALVES, HEATING PIPING, THERMOSTATS, PNEUMATIC PIPING, CONTROL WIRING AND ASSOCIATED EQUIPMENT FROM THIS FLOOR.
 - 3 REMOVE ALL VENTILATION, DUCTWORK, FANS, DIFFUSERS CONTROLS, CONTROL WIRING AND ASSOCIATED EQUIPMENT FROM THIS FLOOR.
 - 4 REMOVE ALL PLUMBING, DOMESTIC HOT AND COLD PIPING, DRAINAGE PIPING, VENT PIPING, HOT WATER TANKS, SINKS, VALVES AND ASSOCIATED EQUIPMENT FROM THIS FLOOR.

- GENERAL NOTES:**
1. ALL LOCATIONS ARE TO BE CONSIDERED APPROXIMATE ONLY. CONFIRM ALL LOCATIONS ON SITE AND ADJUST AS REQUIRED.
 2. DRAWINGS ADAPTED FROM SCANNED ORIGINALS OF BUILDING DESIGN AND LAYOUT. DO NOT SCALE FROM DRAWINGS.
 3. COORDINATE WITH ALL OTHER TRADES.
 4. COMPLETION OF A DISMANTLING DECOMMISSIONING OR DESTRUCTION NOTICE* (WITH A COPY IN THE LOGBOOK ON SITE)
 5. DEMOLITION CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLETE REMOVAL AND DISCARDING OF ALL DEMOLITION WASTE INCLUDING ANY UNFORESEEN ITEMS WITHIN THE SCOPE OF WORK.
 6. DEMOLITION CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AFFECTING THE WORK.
 7. DEPARTMENTAL REPRESENTATIVES SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL EQUIPMENT BEING REMOVED.

MECHANICAL CONSULTANT

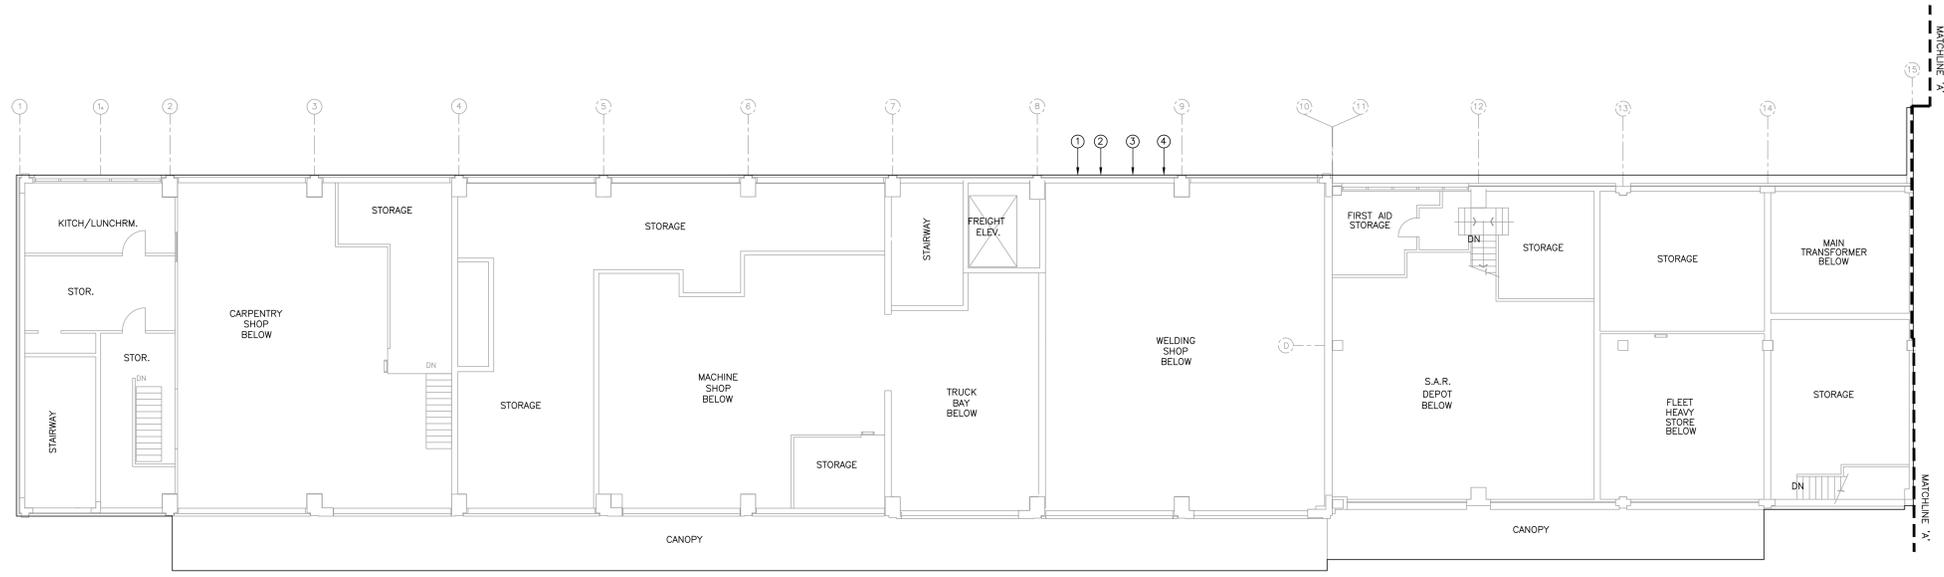

PARTIAL MEZZANINE LEVEL FLOOR PLAN - DEMOLITION LAYOUT

SCALE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

| | | |
|-----------|-------------------|----------|
| 0 | ISSUED FOR TENDER | 11/12/21 |
| revisions | | date |

DECOMMISSIONING, DEMOLITION AND SITE RESTORATION SSB HQ SOUTHSIDE ROAD ST. JOHN'S, NL

MEZZANINE LEVEL FLOOR PLAN - DEMOLITION LAYOUT

| | | |
|------------------------|----------------------------------|---------------|
| designed | N.C. | conçu |
| date | DECEMBER 2020 | |
| drawn | M.K. | dessiné |
| date | DECEMBER 2020 | |
| approved | N.C. | approuvé |
| date | DECEMBER 2020 | |
| Tender | | Soumission |
| PM/SGC Project Manager | Administrateur de projets TP/SGC | |
| project number | R.111146.001 | no. du projet |
| drawing no. | MD-2 | no. du dessin |