

FOR BIDDING PURPOSES

CABLEWAY UPGRADES & REPAIRS SURPRISE CREEK NEAR THE MOUTH (08DA005)

LIST OF DRAWINGS:

- DWG-01: TITLE BLOCK
- DWG-02: ASSET REMOVAL AND INSTALLATION PLAN
- DWG-03: PLATE ANCHOR AND ROPE ATTACHMENTS WITH DETAILS
- DWG-04: STEEL FOOTINGS AND ROPE ATTACHMENTS
- DWG-05: STEEL PLATE ANCHOR DETAILS
- DWG-06: NEW FAR-SIDE HD A-FRAME

Item	Description	Quantity	Unit

0. 08DA005 TENDER
 2023-07-07
 2023-07-07

PROJECT: CABLEWAY UPGRADES & REPAIRS
 SURPRISE CREEK
 08DA005

LOCATION: SURPRISE CREEK NEAR THE MOUTH
 BRITISH COLUMBIA

DRAWING NO.: 08DA005-01
 SHEET NO.: 01 OF 01
 DATE: 2023-07-07


TITLE BLOCK
 2023-07-07
 DWG-01
 0

FOR BIDDING PURPOSES

A COMPLETE 5 METRE A-FRAME ASSEMBLY
CONSISTS OF THE FOLLOWING:

QTY	DESCRIPTION	DWG. No.	SUPPLIER
1	A-FRAME TOP ASSEMBLY	3136-4	CONTRACTOR
1	4 METRE LEG ASSEMBLY	3136-5	CONTRACTOR
1	1 METRE LEG ASSEMBLY	3136-5	CONTRACTOR
1	1.8 METRE HORIZONTAL BRACE ASSEMBLY	3136-6	CONTRACTOR
1	CAR HOOK ASSEMBLY LEG	3136-10	CONTRACTOR

EST. WT. 668.0 KG
* WATER SURVEY OF CANADA

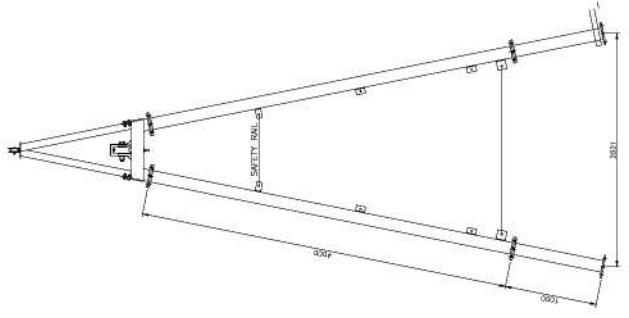

5. METRE A-FRAME
EXACT HEIGHT TO CENTRE OF 25# WIRE ROPE IN MAIN CABLE SHEAVE = 5.24 METRES (WITHOUT FOOT PILES)

NOTES:

1. ALL PARTS TO BE HOT-DIPPED GALVANIZED, C.S.A. G-164.
2. ALL STEEL PARTS TO BE 100% PROTECTED WITH ZINC RICH PRIMER.
3. ALL STEEL SHALL CONFORM TO C.S.A. C40.21 IN GRADE 350W GALVANIZED.

ALL DIMENSIONS IN MILLIMETRES
UNLESS OTHERWISE NOTED

Item	Description	Unit	Quantity
0	FRAME FOR TENDER	2022-08	

PROJECT: CABLEWAY UPGRADES & REPAIRS
 SURPRISE CREEK
 URDAM05

LOCATION: SURPRISE CREEK NEAR THE MOUTH
 BRITISH COLUMBIA

Contract No.	Client No.
ECOS	Project No.
ECOS	Contract No.
ECOS	Contract No.
ECOS	Contract No.
ECOS	Contract No.

NEW FAR SIDE
HD A-FRAME

Project No.	2022-07
Contract No.	DWGS-06
Revision No.	0