




1 WALL MOUNTED PTZ CAMERA
Scale: N.T.S.

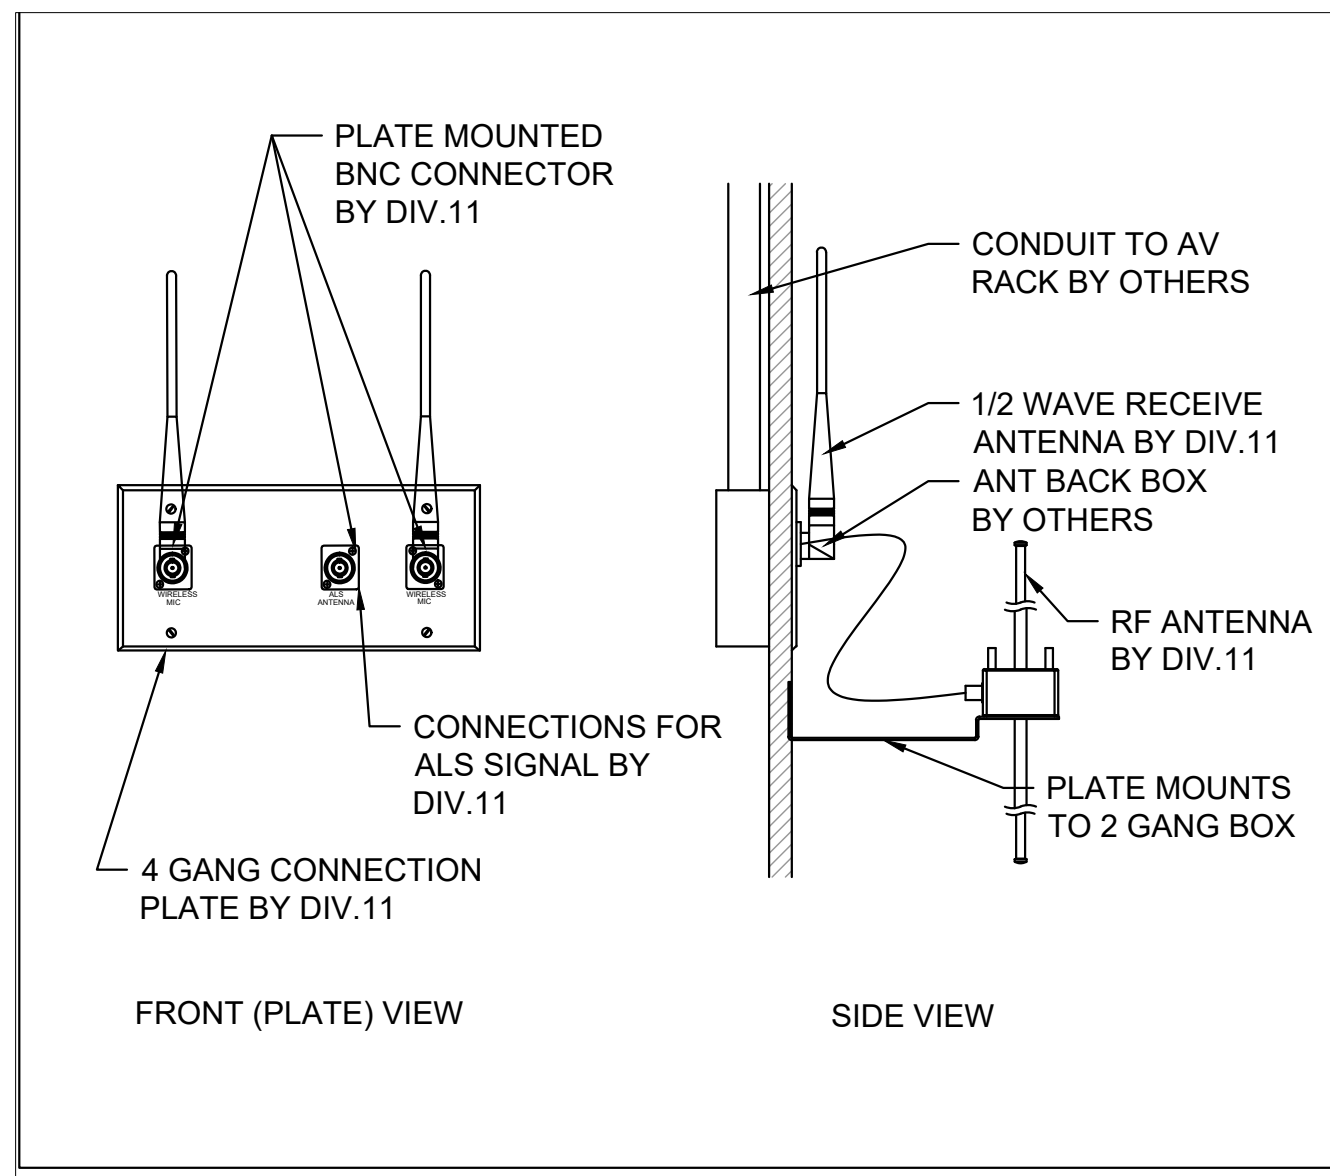


2 WIRELESS ANTENNA BOX
Scale: N.T.S.

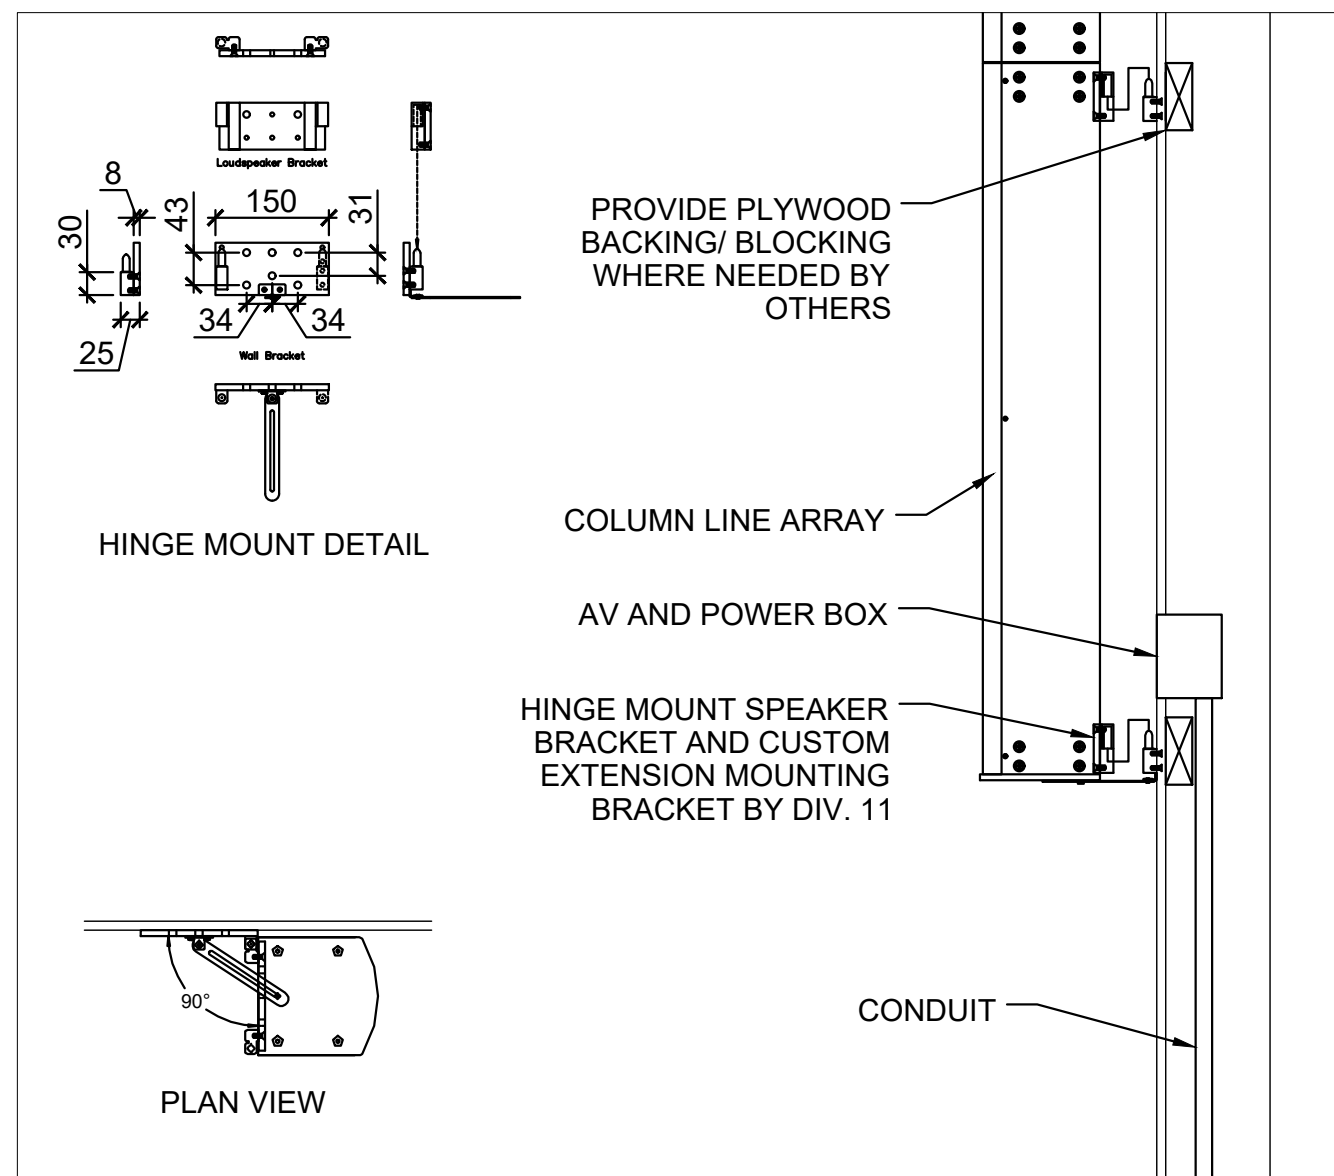

3 COLUMN ARRAY LOUDSPEAKER
Scale: N.T.S.

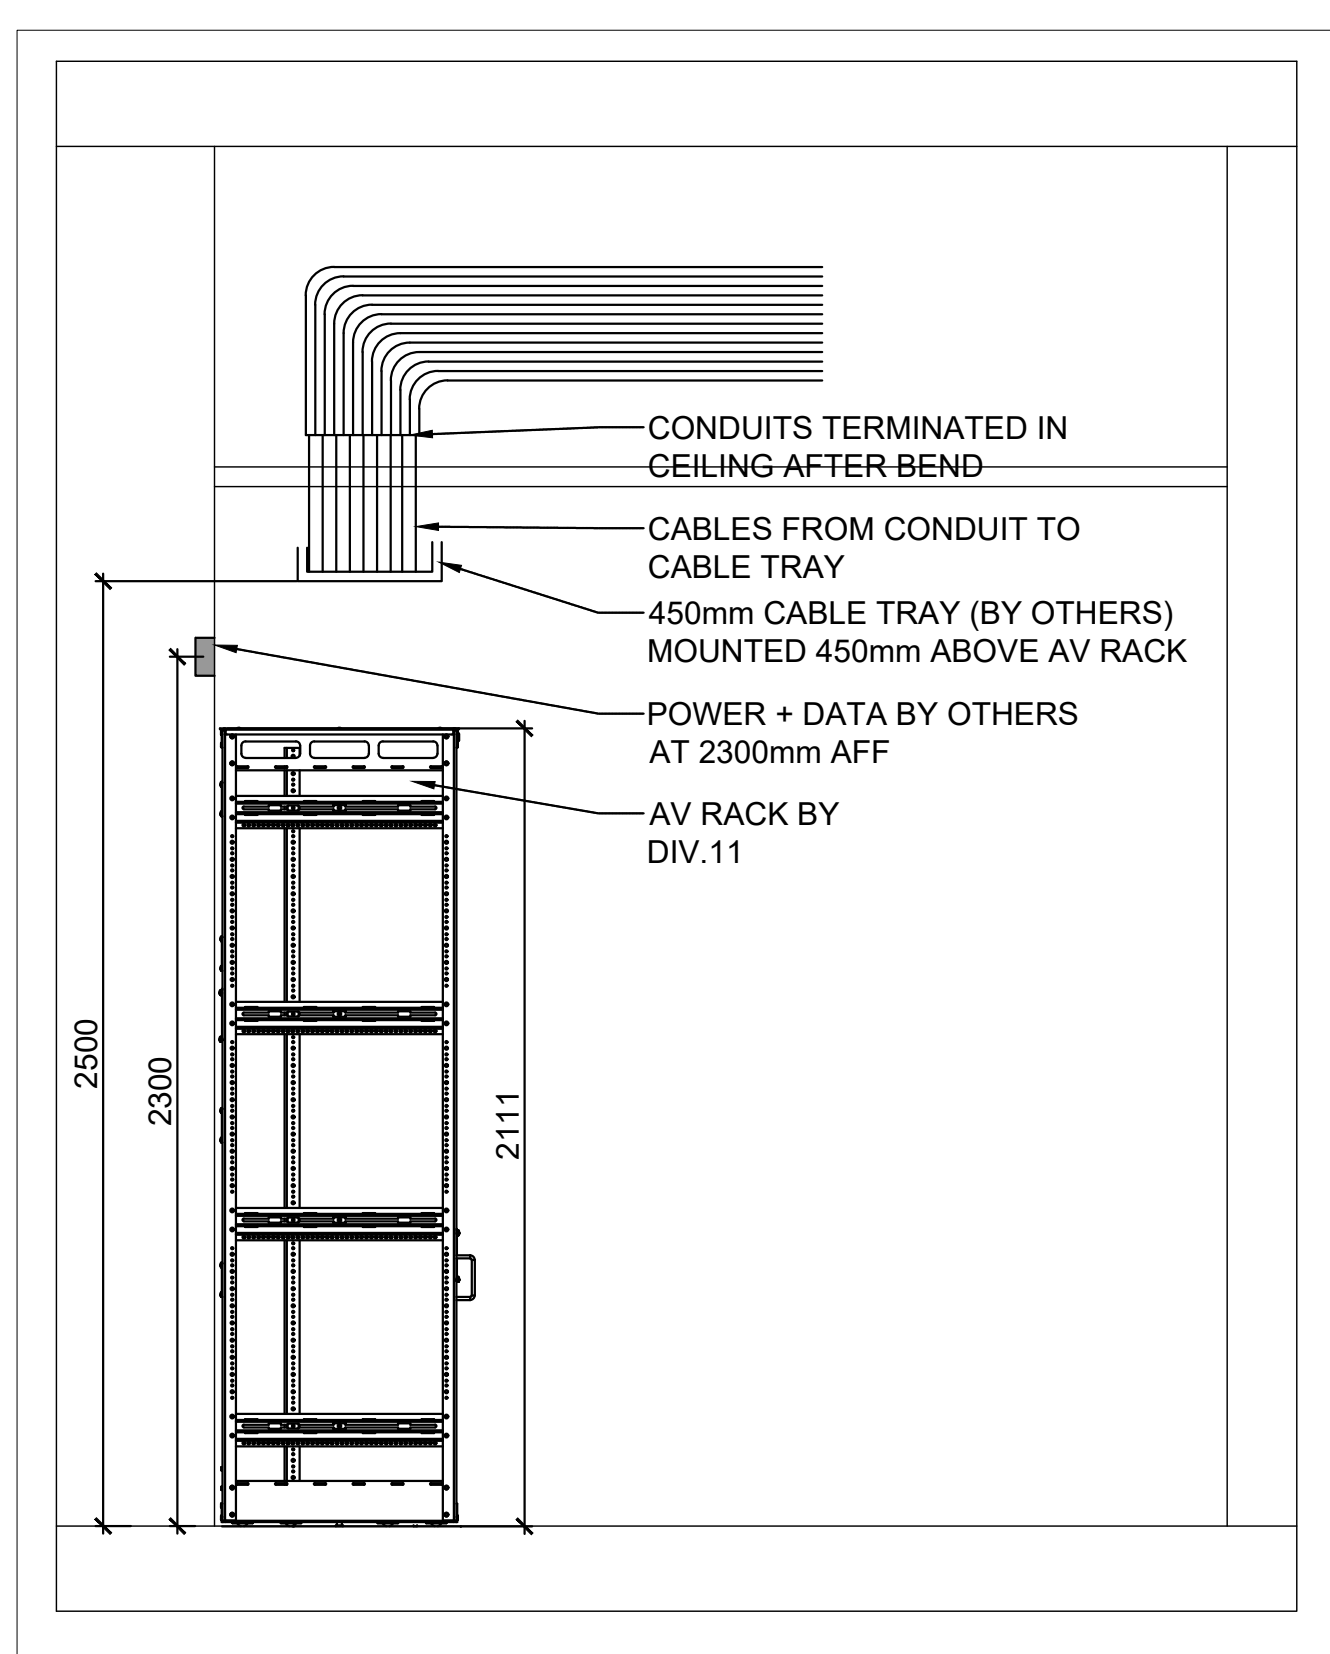


4 AV RACK W/ CABLE TRAY
Scale: N.T.S.

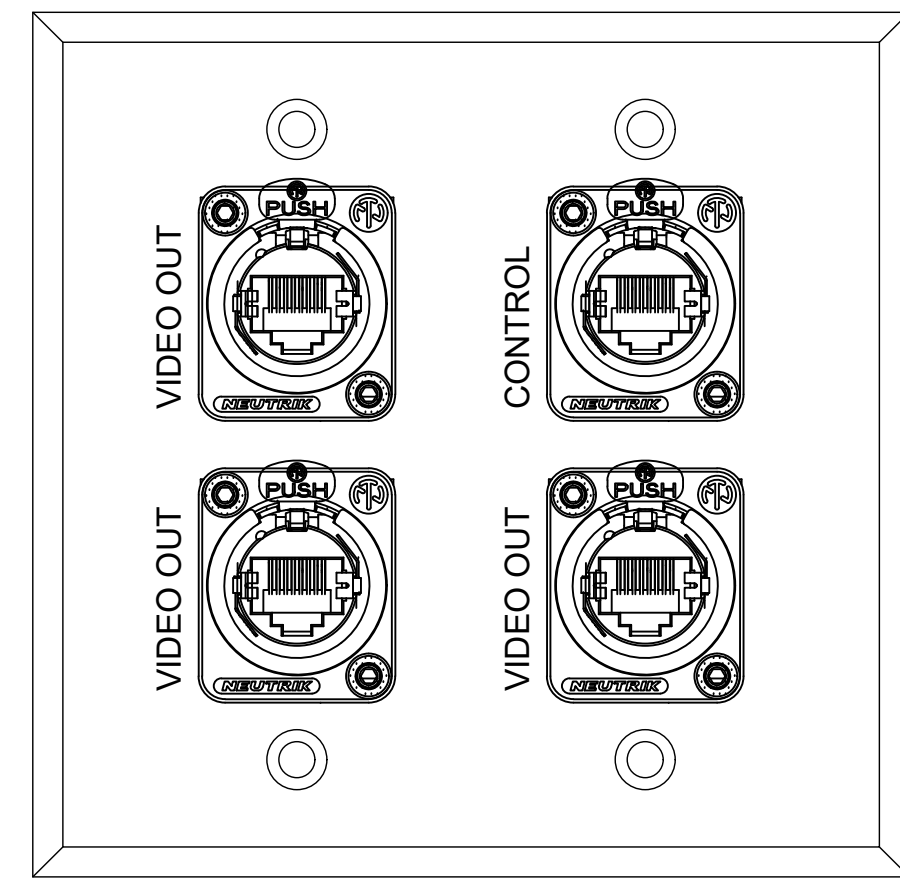

5 JB (2) FUTURE VIDEO BOX - ATRIUM


NOTES:
MATERIAL: 2.54mm ALUMINUM; CHAMFER FACE
EDGES APPROX. 3.175mm AT 45 DEG.
FINISH: HARD ANODIZED; COLOUR TBD
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
CONNECTORS: **PROVIDE A MAXIMUM OF 4 D-TYPE
CONNECTORS FOR A PLATE THIS SIZE**
SIZE: 114mm x 114mm (2 GANG)

SUPPLIER TO CHECK BACKBOX SIZE WITH
ELECTRICAL CONTRACTOR

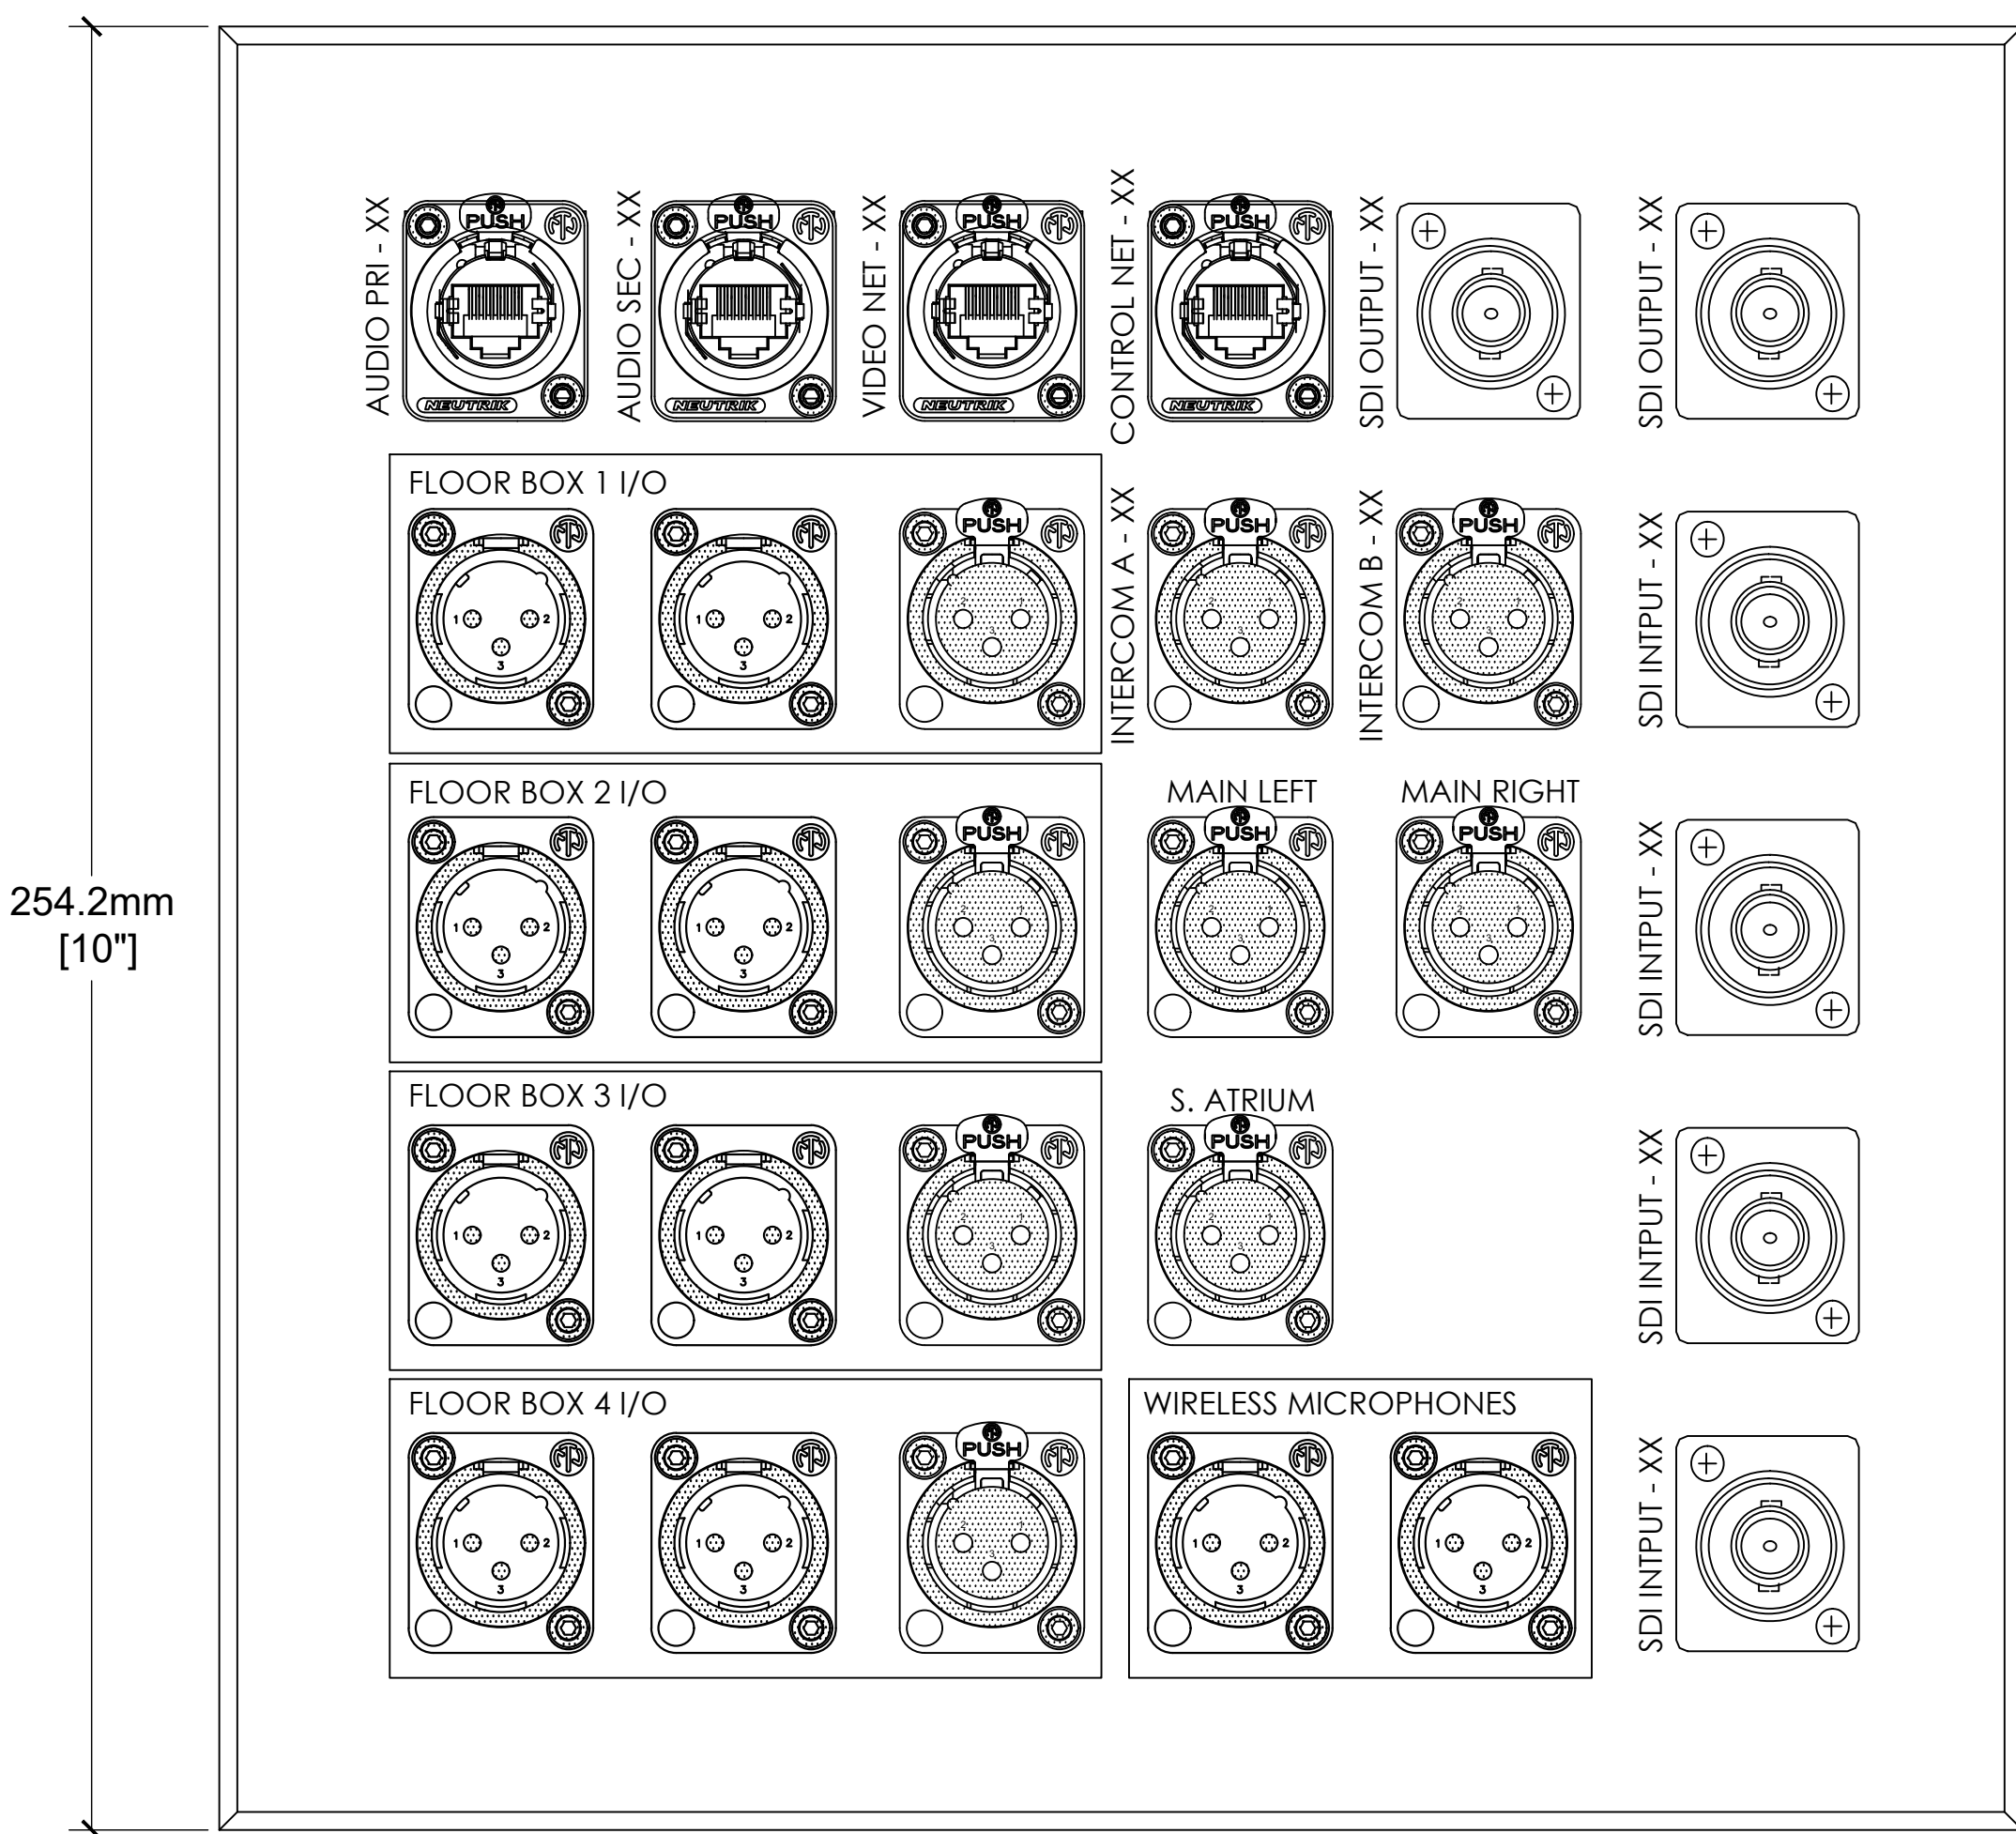


6 MULT 10x10x4 BOX - ATRIUM
NOTES:
MATERIAL: 2.54mm ALUMINUM; CHAMFER FACE EDGES APPROX. 3.175mm AT 45 DEG.
FINISH: HARD ANODIZED - COLOUR TBD
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
CONNECTORS: **PROVIDE A MAXIMUM OF 30 D-TYPE CONNECTORS FOR A PLATE THIS SIZE**
SIZE: 254mm x 254mm

SUPPLIER TO CHECK BACKBOX SIZE WITH ELECTRICAL CONTRACTOR

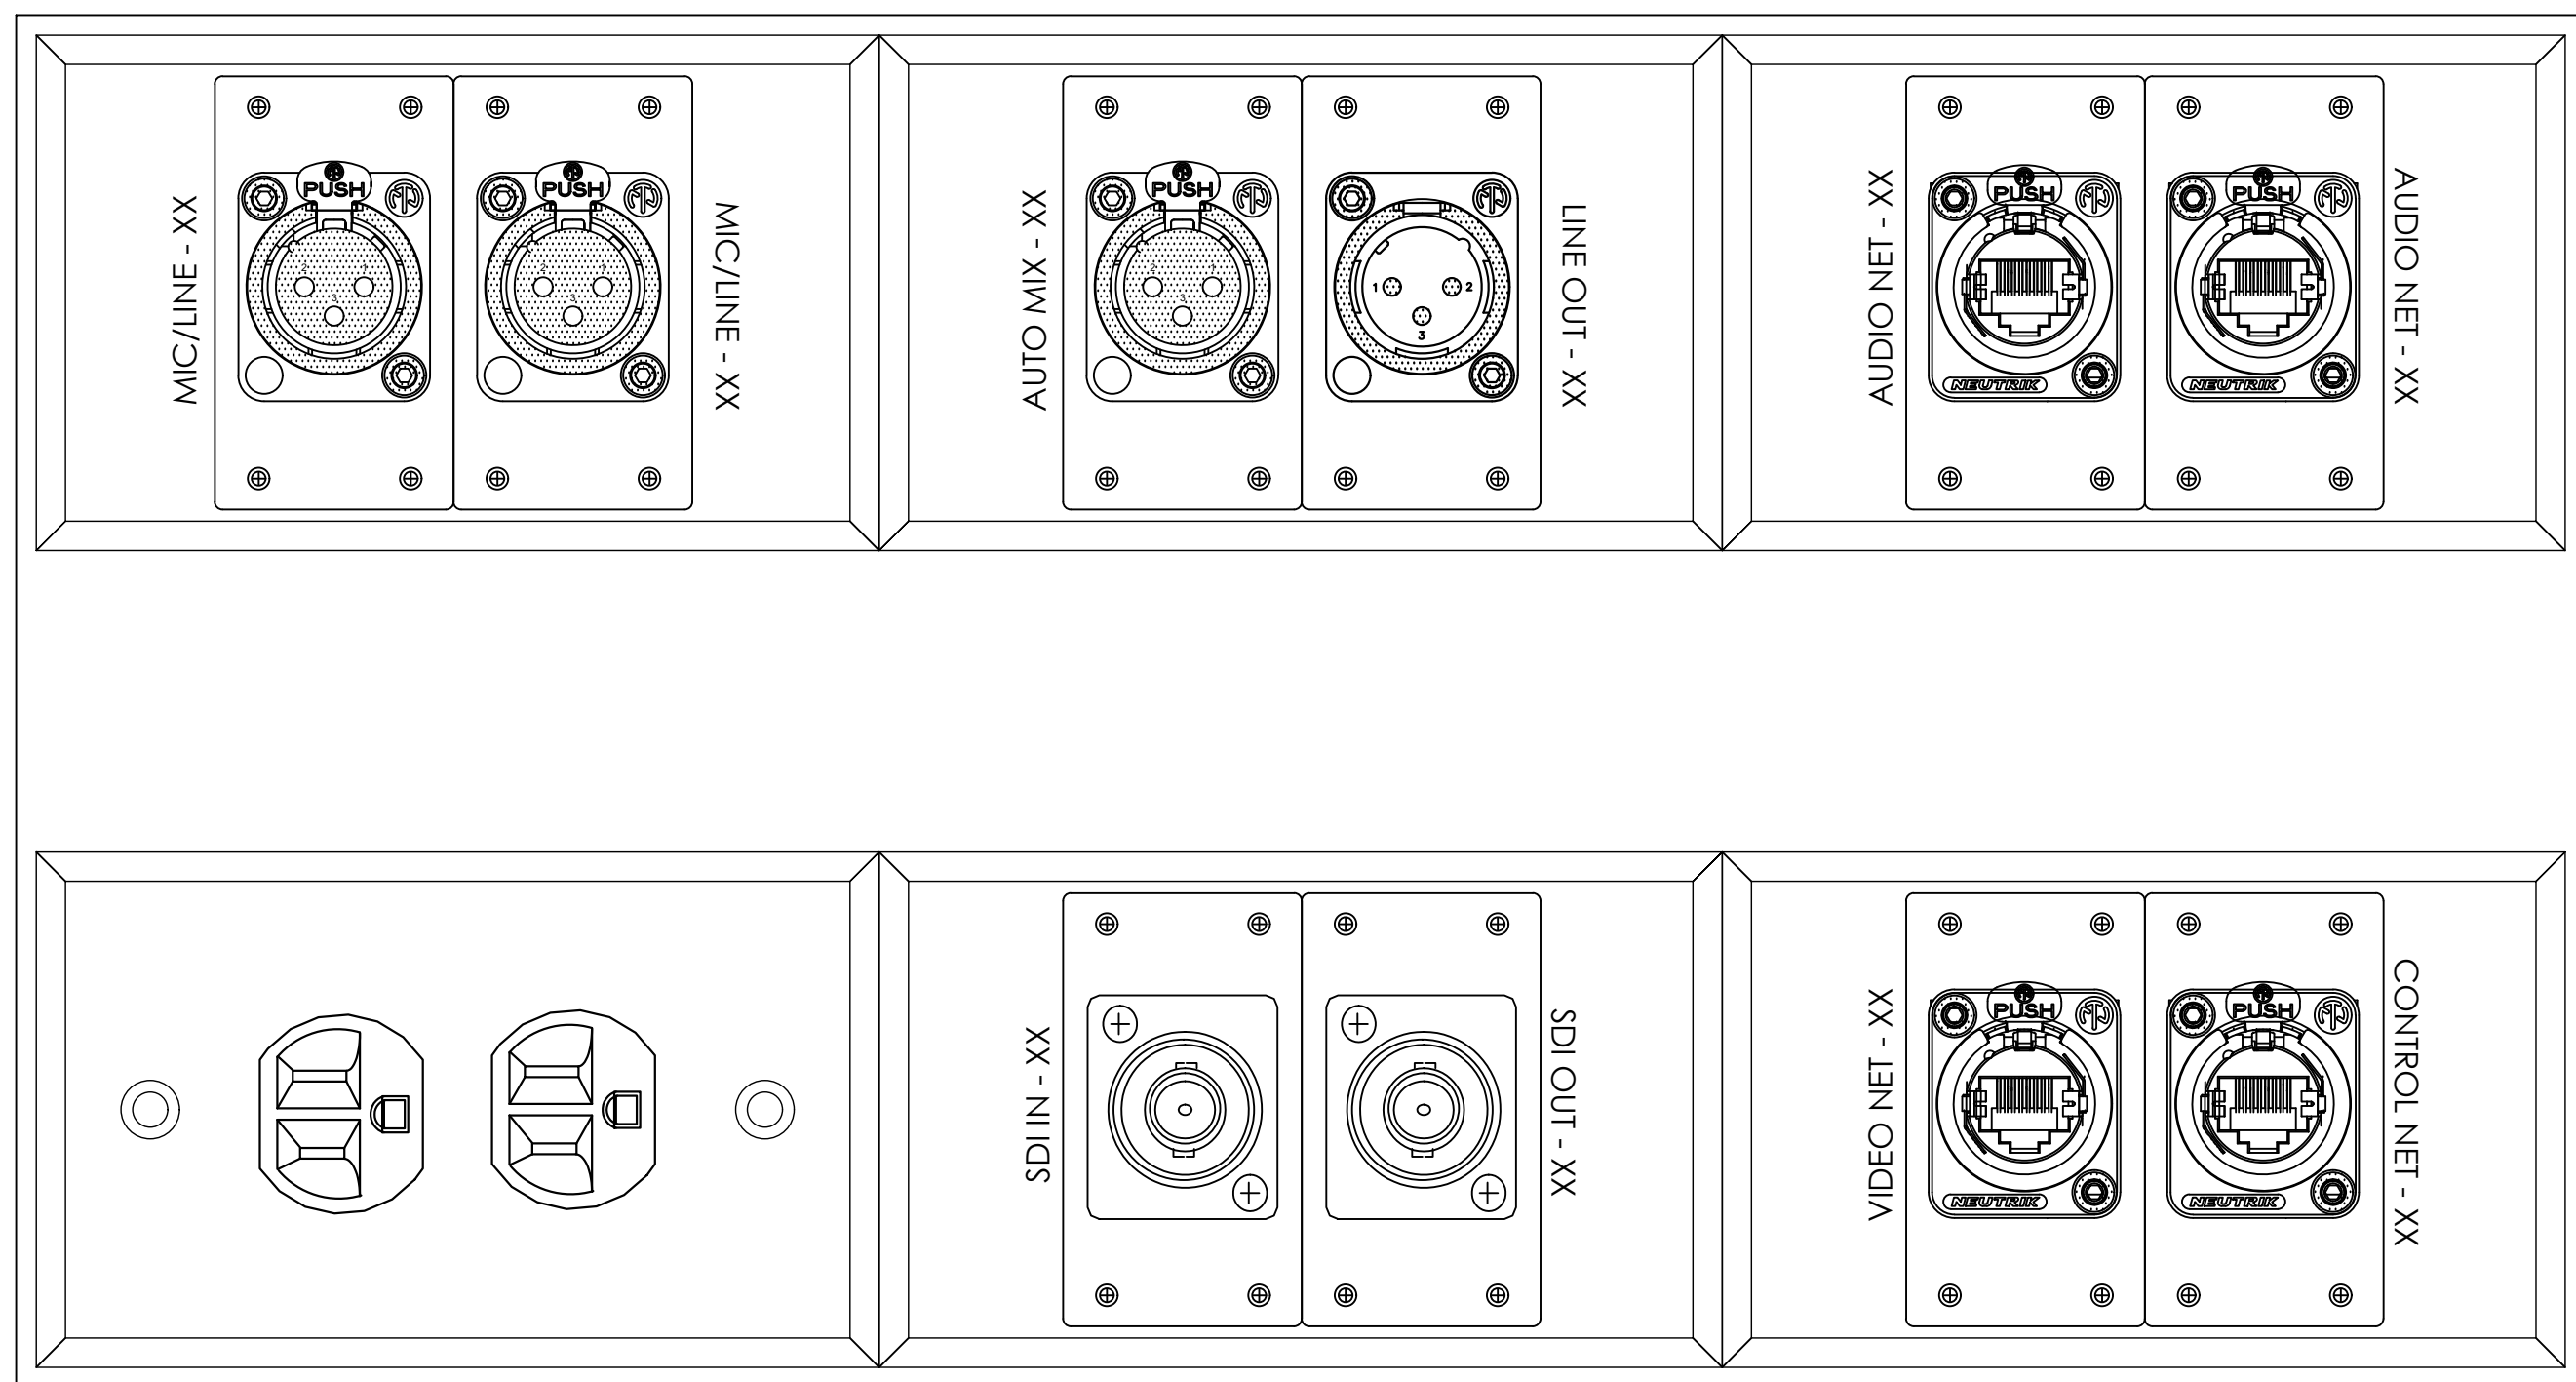


6 STAGE FLOOR BOX - ATRIUM
NOTES:
**BASED ON LEGRAND EVOLUTION SERIES FLOOR BOX
MODEL: EFB6S-OG**
FINISH: BLACK DIE CAST ALUMINUM COVER (COLOUR TO BE CONFIRMED WITH CLIENT)
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
SIZE: N.T.S.
ALL ADDITIONAL CONNECTOR PLATES, CONDUIT KNOCKOUT PLATES AND FLUSH STYLE COVER WITH SOLID LID TO BE SUPPLIED WITH FLOOR BOX

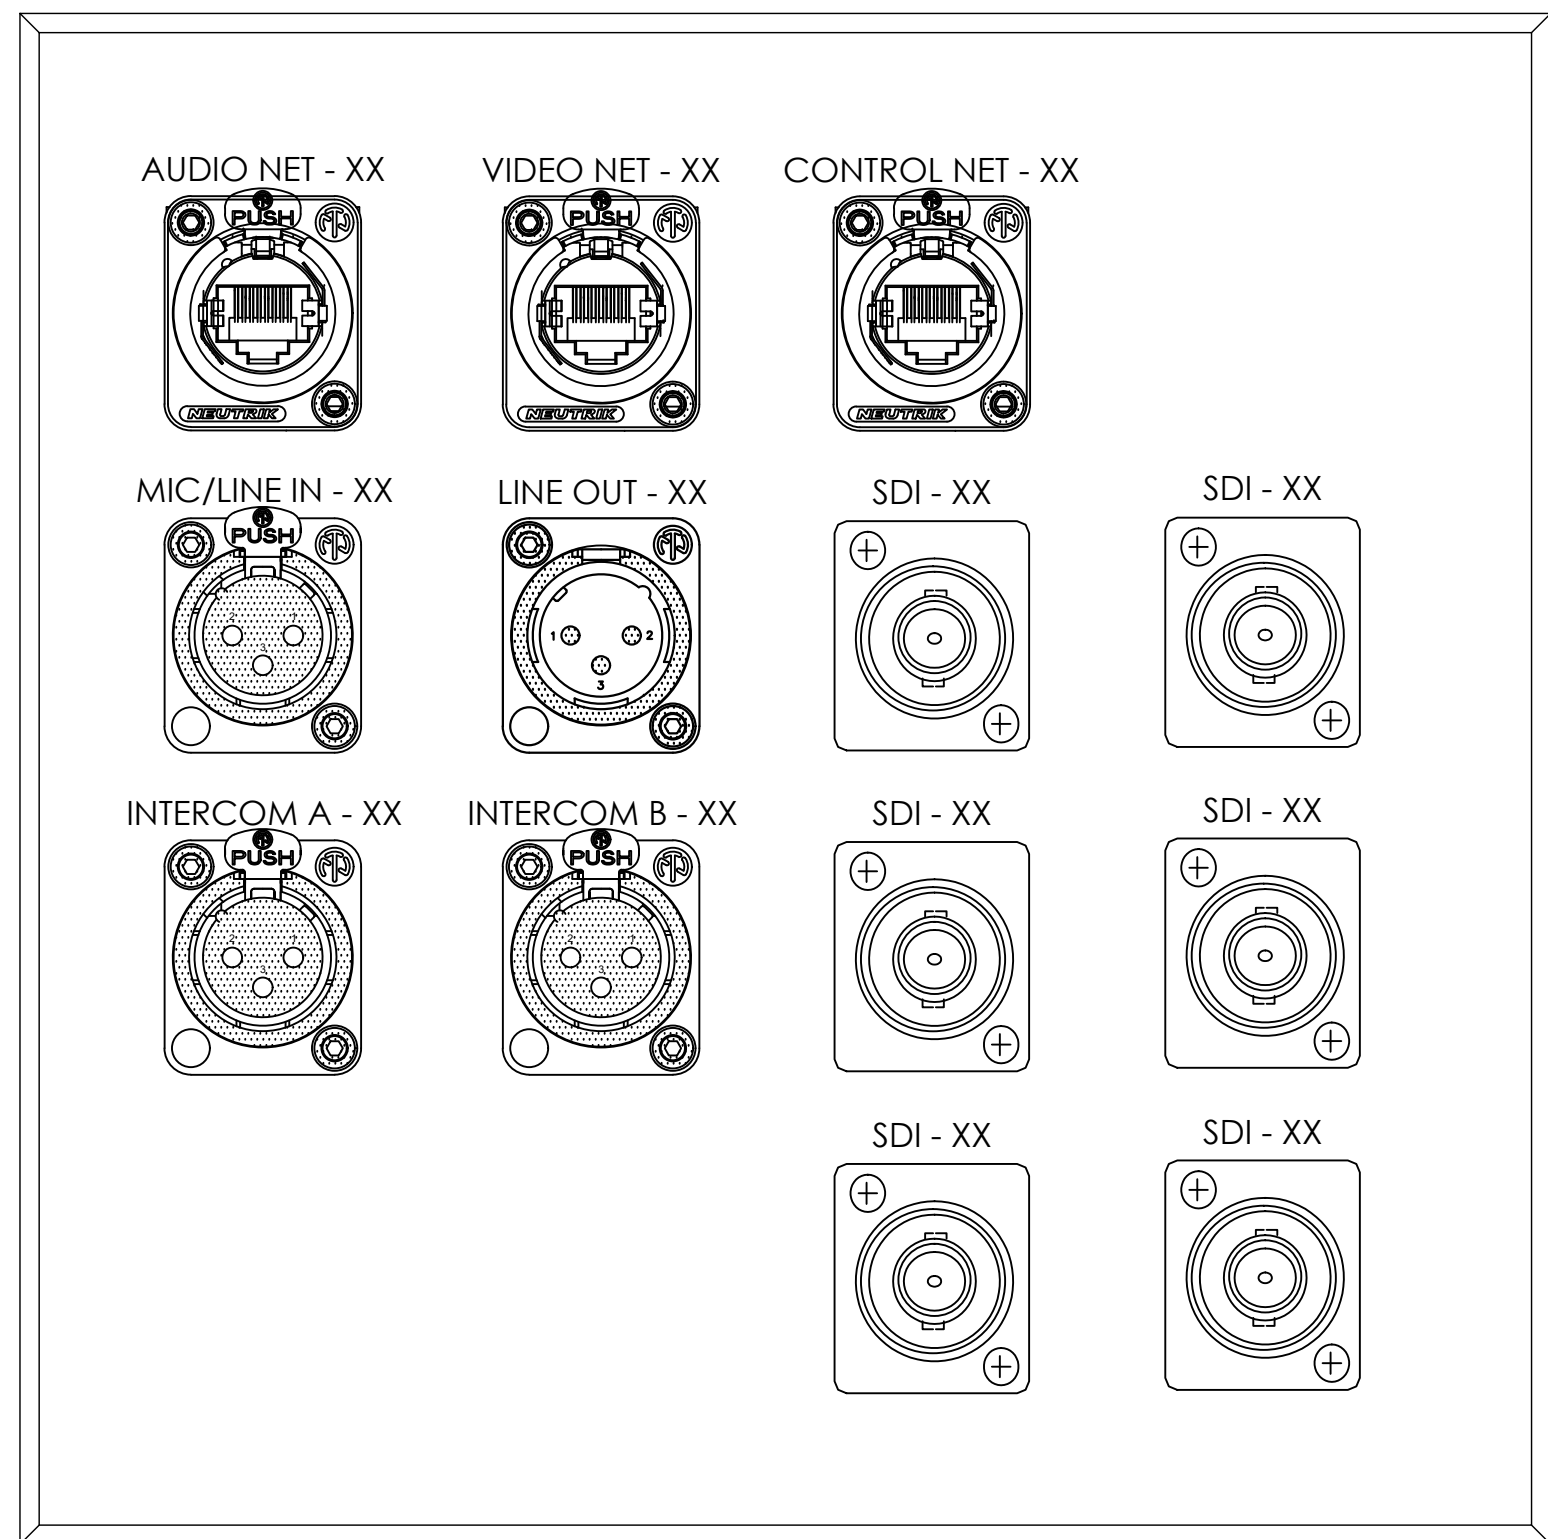


7 MULT 6x6x4 BOX - VIDEO STUDIO
NOTES:
MATERIAL: 2.54mm ALUMINUM; CHAMFER FACE EDGES APPROX. 3.175mm AT 45 DEG.
FINISH: HARD ANODIZED - COLOUR TBD
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
CONNECTORS: **PROVIDE A MAXIMUM OF 9 D-TYPE CONNECTORS FOR A PLATE THIS SIZE**
SIZE: 152mm x 152mm

SUPPLIER TO CHECK BACKBOX SIZE WITH ELECTRICAL CONTRACTOR

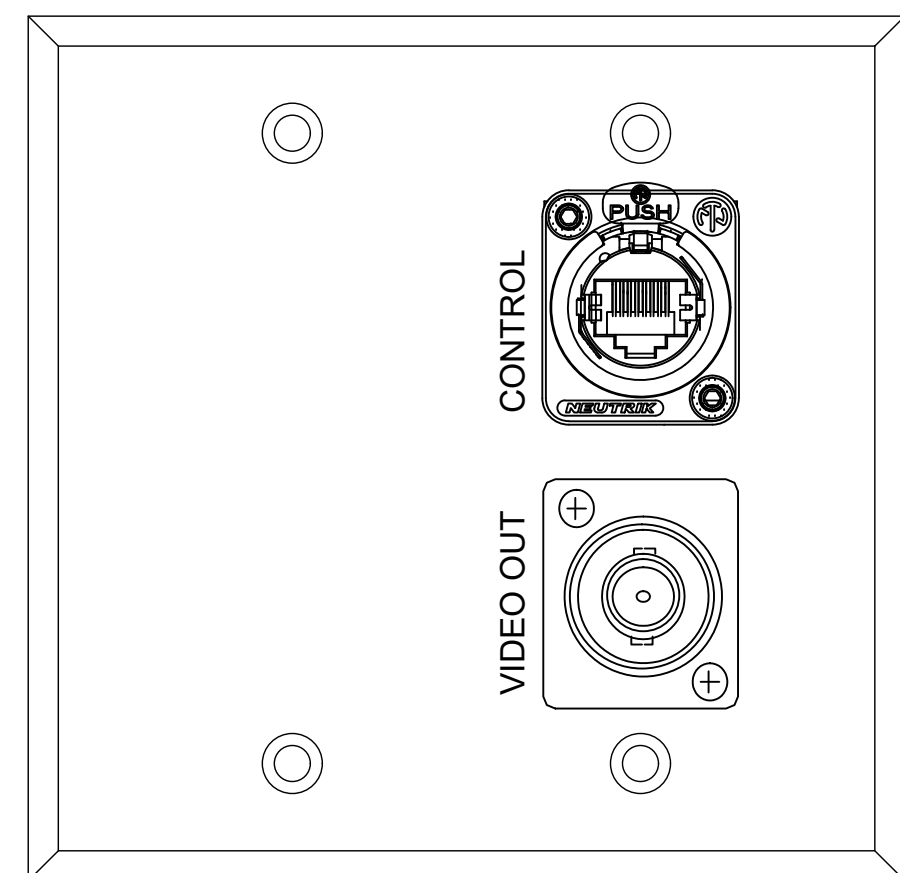


8 PTZ (2) BOX - ATRIUM
NOTES:
MATERIAL: 2.54mm ALUMINUM; CHAMFER FACE EDGES
APPROX. 3.175mm AT 45 DEG.
FINISH: HARD ANODIZED; COLOUR TBD
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
CONNECTORS: **PROVIDE A MAXIMUM OF 4 D-TYPE
CONNECTORS FOR A PLATE THIS SIZE**
SIZE: 114mm x 114mm (2 GANG)

SUPPLIER TO CHECK BACKBOX SIZE WITH ELECTRICAL
CONTRACTOR

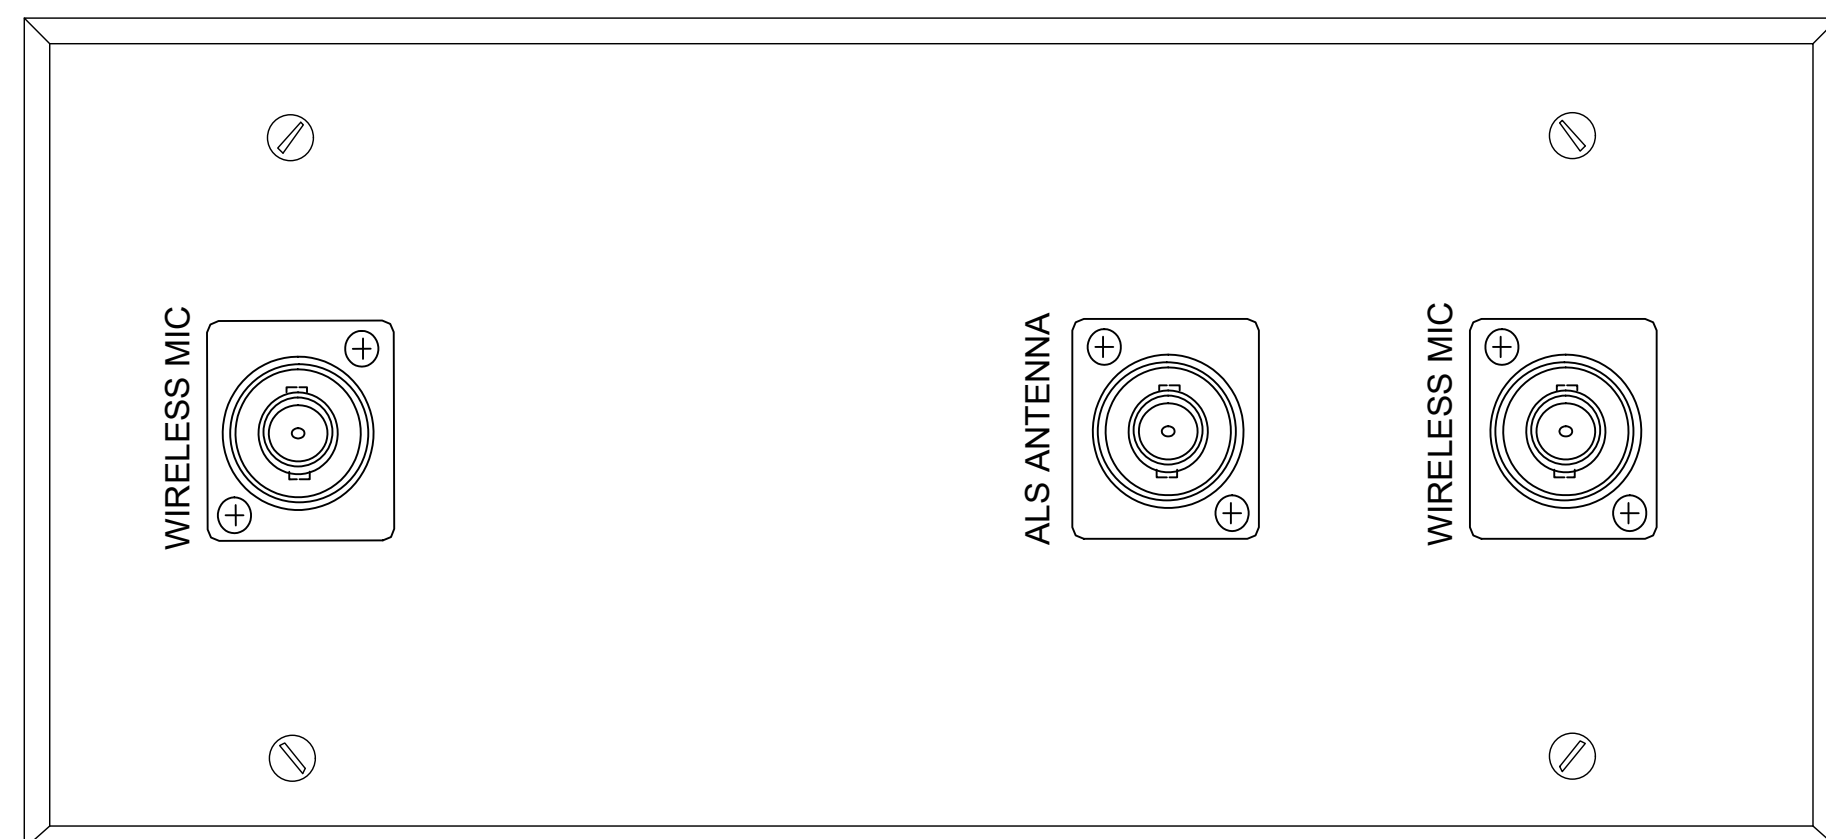


7 ANT (4) BOX - ATRIUM
NOTES:
MATERIAL: 2.54mm ALUMINUM; CHAMFER FACE EDGES
APPROX. 3.175mm AT 45 DEG.
FINISH: HARD ANODIZED; COLOUR TBD
HOLES: COUNTERSUNK FOR #6 OVAL HEAD SCREW
LETTERING: ENGRAVED - WHITE FILLED
CONNECTORS: **PROVIDE A MAXIMUM OF 8 D-TYPE
CONNECTORS FOR A PLATE THIS SIZE**
SIZE: 240mm x 114mm (4 GANG)

SUPPLIER TO CHECK BACKBOX SIZE WITH ELECTRICAL
CONTRACTOR

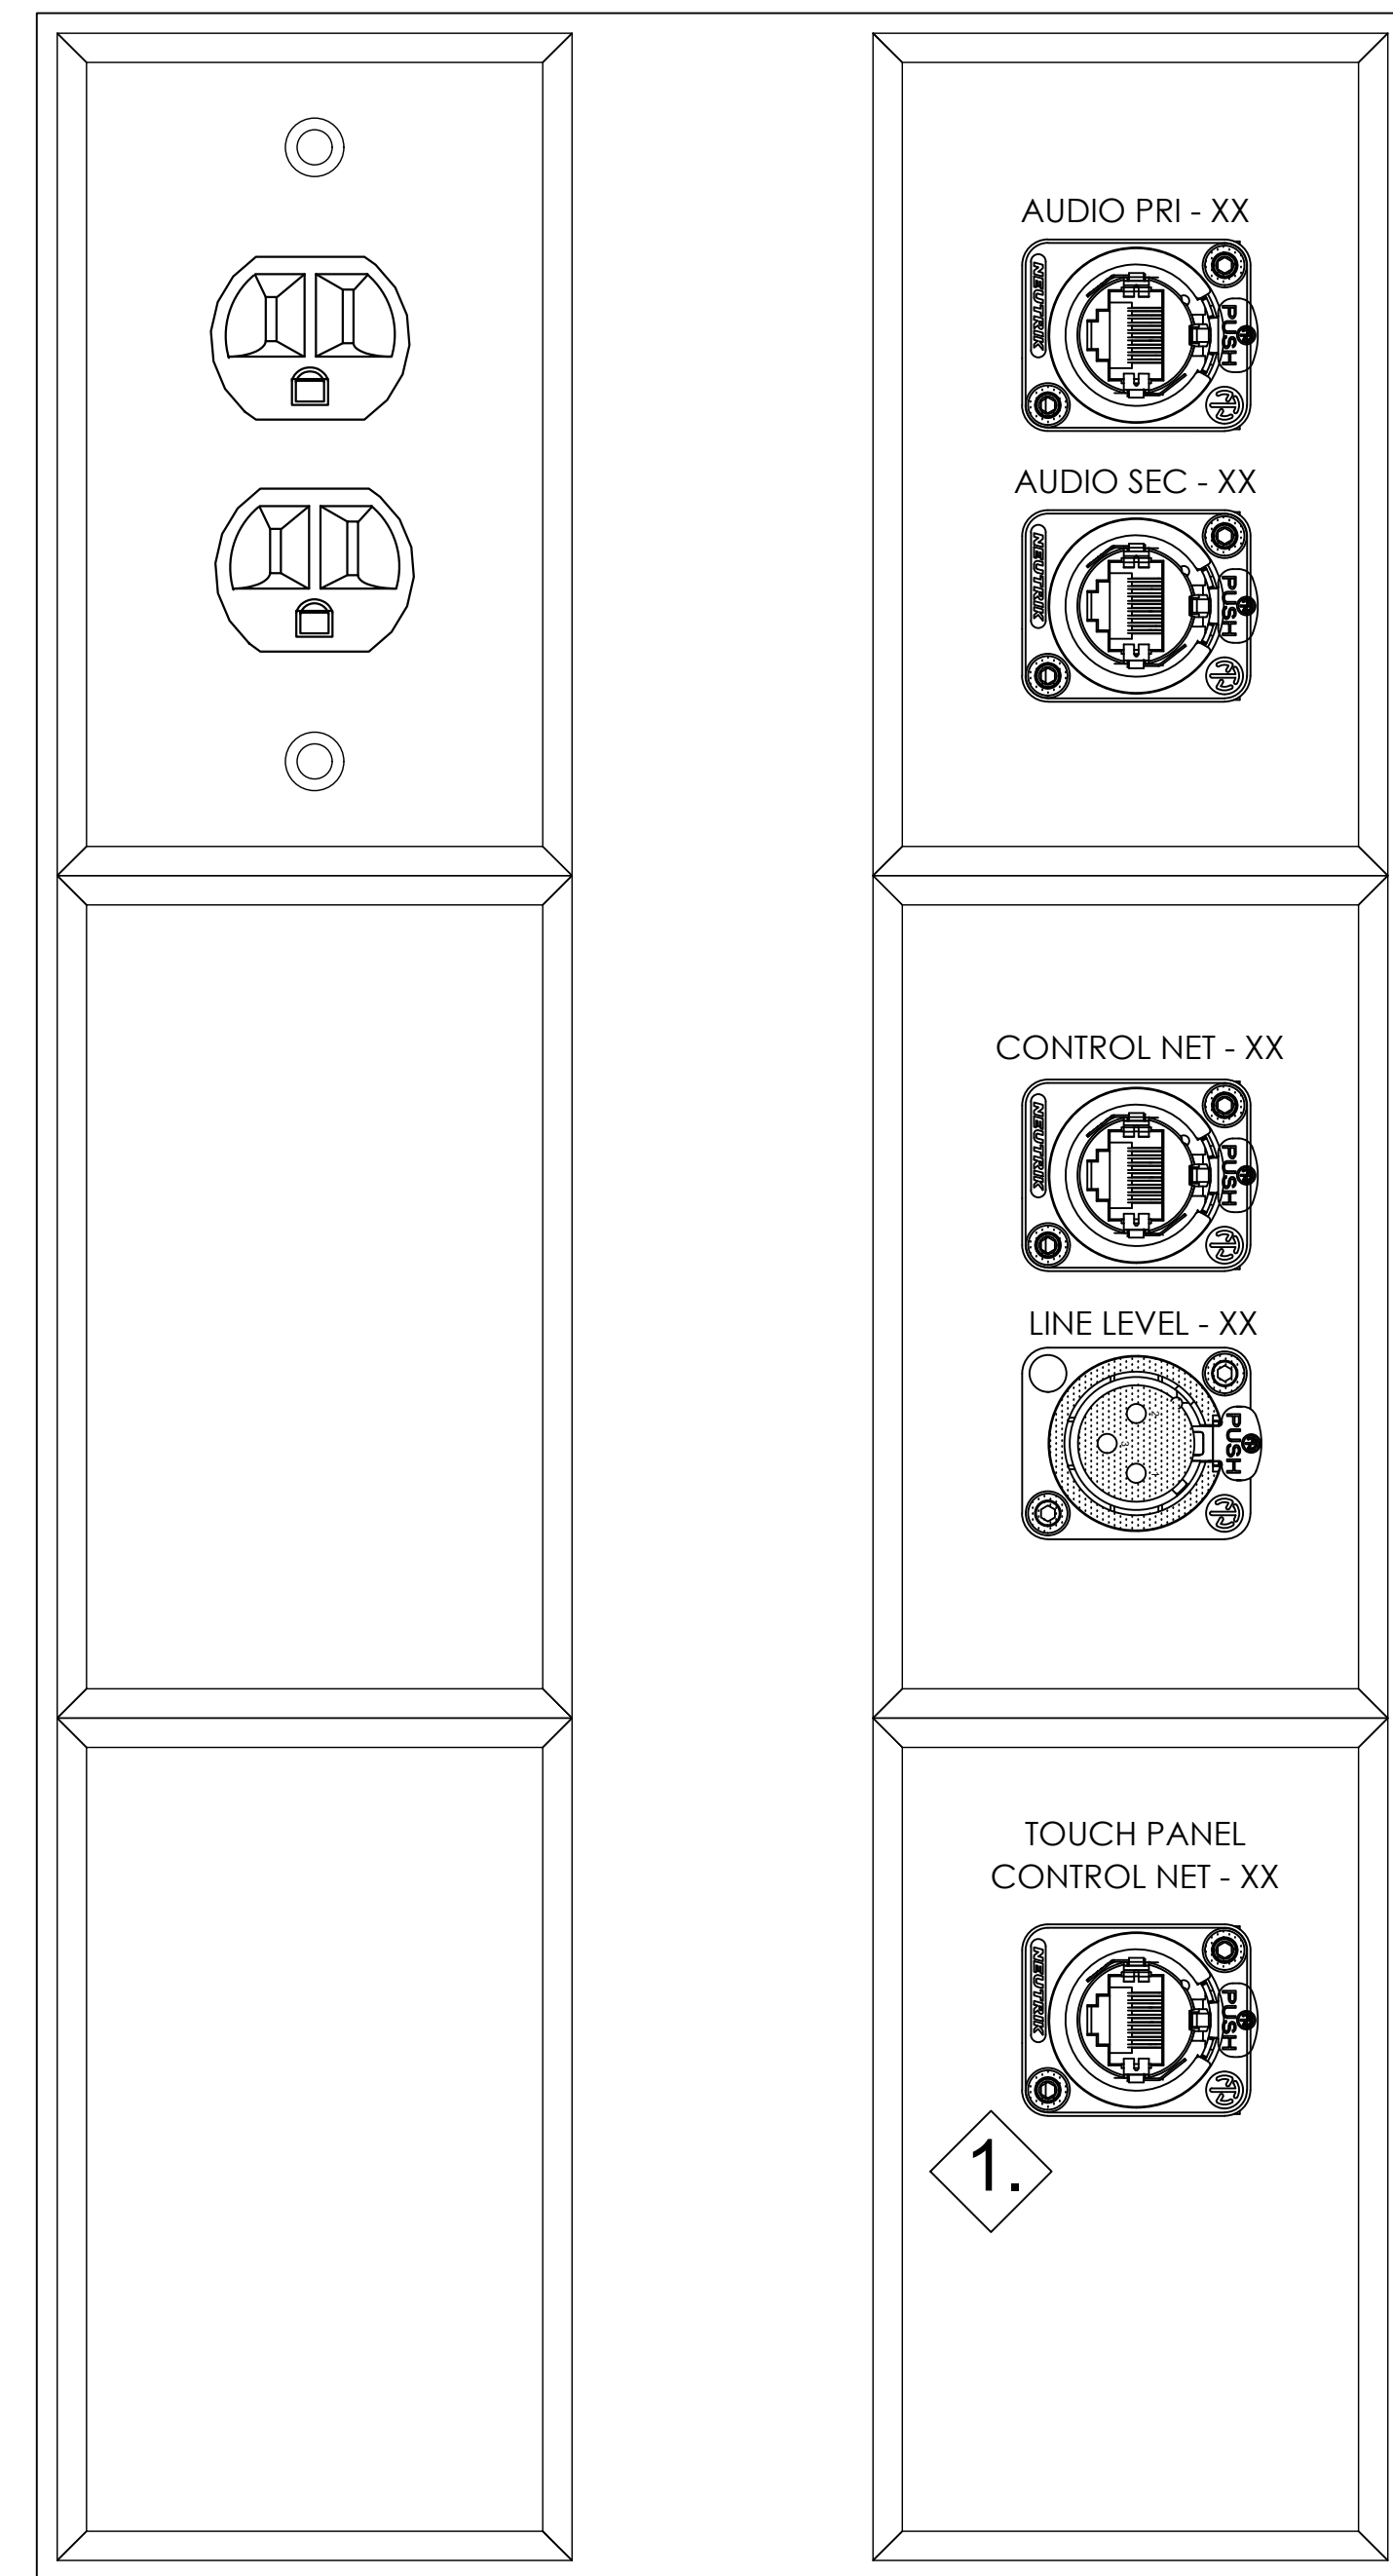

6 CUSTOM MULT BOX (MULT CUST)
NOTES:
USED FOR STAGE LEFT, STAGE RIGHT, AND SOUTH ATRIUM COLUMN
LOUDSPEAKERS
1. **NOTE THAT ONLY STAGE RIGHT MULT CUST BOX CONTAINS THE TOUCH PANEL
CONTROL NETWORK RJ45 CONNECTION**
FINISH: PLASTIC (COLOUR TO BE CONFIRMED WITH CLIENT)
SIZE: N.T.S.

key plan

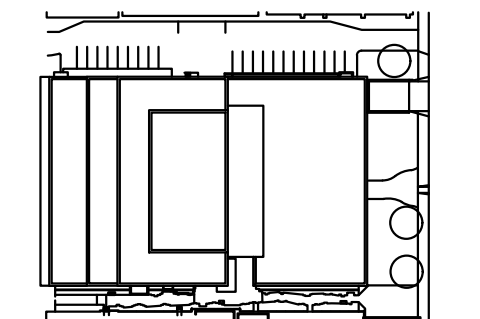

project and true North

project legend

E	ISSUED FOR TENDER	2022-05-07
D	REVISED FINAL SUBMISSION	2022-03-28
C	ISSUED FOR 100% CD	2022-03-18
B	ISSUED FOR 60% CD	2022-02-11
A	ISSUED FOR 100% DD	2022-01-18

revisions	date
-----------	------

project	project
DANIEL J MACDONALD	MODERNIZATION

161 GRAFTON ST.
CHARLOTTETOWN, PEI, C1A 1L1

drawing	desch
---------	-------

DETAILS

N.T.S.

designed	NOVITA	conçu
date	2022-01-18	
drawn	NOVITA	dessiné
date	2022-05-20	
approved	CB	approuvé
date	2022-01-19	
Tender	Submission	
PWGSC Project Manager	Administrateur de projets TPSCG	
project number	no. du projet	

2014

drawing no.	no. du dessin
-------------	---------------

AV5-01