


PILE SCHEDULE						As-Installed	
Pile No.	Pile Cut-Off Elevation (m)	Approx. Bedrock Elevation (m)	Approx. Pile Tip Elevation (m)	Supplied Pile Length (m)	Estimated Installed Pile Length (m)	Actual Pile Tip Elevation (m)	Actual Installed Pile Length (m)
1	2.725	-2.03	-5.03	9.26	7.76		
2	2.725	-2.07	-5.07	9.30	7.80		
3	2.725	-2.11	-5.11	9.34	7.84		
4	2.725	-2.15	-5.15	9.38	7.88		
5	2.725	-2.19	-5.19	9.42	7.92		
6	2.725	-2.22	-5.22	9.45	7.95		
7	2.725	-2.26	-5.26	9.49	7.99		
8	2.725	-2.30	-5.3	9.53	8.03		
9	2.725	-2.34	-5.34	9.57	8.07		
10	2.725	-2.38	-5.38	9.61	8.11		
11	2.725	-2.41	-5.41	9.64	8.14		
12	2.725	-2.45	-5.45	9.68	8.18		
13	2.725	-2.49	-5.49	9.72	8.22		
14	2.725	-2.53	-5.53	9.76	8.26		
15	2.725	-2.57	-5.567	9.79	8.29		
16	2.725	-2.60	-5.6	9.83	8.33		
17	2.725	-2.64	-5.64	9.87	8.37		
18	2.725	-2.68	-5.68	9.91	8.41		
19	2.725	-2.71	-5.71	9.94	8.44		
20	2.725	-2.76	-5.76	9.99	8.49		
21	2.725	-2.79	-5.79	10.02	8.52		
22	2.725	-2.83	-5.83	10.06	8.56		

PROJECT WORK POINTS (W.P.)		
WORK POINT	NORTHING	EASTING
W.P. #1	N 7469285.072	E 2680338.496
W.P. #2	N 7469271.840	E 2680399.067

PLAN DETAIL OF NEW STRUCTURE

SCALE : 1:100

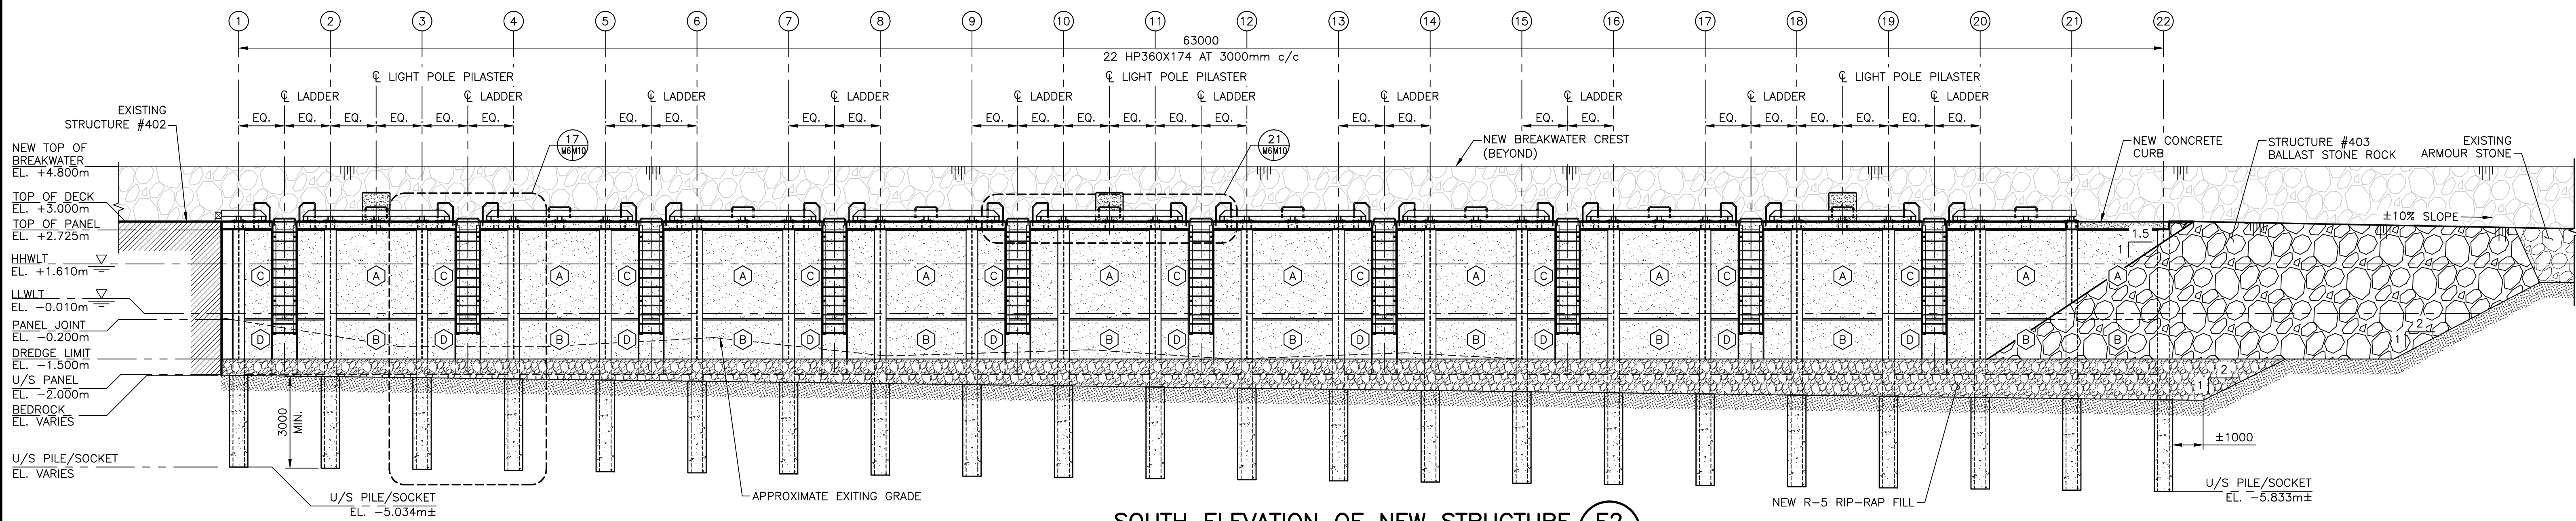

SOUTH ELEVATION OF NEW STRUCTURE

SCALE : 1:100

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m



LEGEND:

- DFO PROPERTY LINE
- P PARKING AREA
- BUILDING
- ARMOUR STONE
- x +2.63 EXISTING SPOT ELEVATION
- x -1.50 NEW SPOT ELEVATION
- W.P. #1 WORK POINT
- H HOLDFAST "B"
- L LADDER



0	ISSUED FOR TENDER	JUL 14 2022
revisions		date

project NEW MARGINAL WHARF AND BREAKWATER project

STRUCTURE 403 PETIT-CAP NB

drawing PLAN VIEW AND ELEVATION OF NEW STRUCTURE design

designed J. CAMPBELL conçu
date JANUARY 2022
drawn S. GILLIS dessiné
date JANUARY 2022
approved S. O'BRIEN approuvé
date JUNE 2022
Tender Soumission

PWSC Project Manager Administrateur de projets TPSC
project number R.116039.001 no. du projet

drawing no. M6 of 11 no. du dessin