

GENERAL NOTES - FIRE ALARM


- A THESE DRAWINGS AND SPECIFICATIONS TO BE READ IN CONJUNCTION WITH ARCHITECTURAL, STRUCTURAL, INTERIOR DESIGNER'S, MECHANICAL, AND OTHER DIVISIONS DRAWINGS. ALL ELECTRICAL WORK SHALL COMPLY WITH OWNER'S REQUIREMENTS AND BASE BUILDING STANDARDS.
- B "AS REQUIRED, MAKE OPERATIONAL" - DENOTES ELECTRICAL INSTALLATION TO SUIT SITE CONDITIONS TO CONFORM WITH THE REQUIREMENTS OF ALL APPLICABLE CODES AND STANDARDS AND INSTALLATION TO INCLUDE ALL NECESSARY MATERIAL, EQUIPMENT AND LABOUR (ALTHOUGH NOT SHOWN ON THE DRAWINGS) TO MAKE IT OPERATIONAL. NO ALLOWANCES WILL BE MADE SUBSEQUENTLY FOR ANY CONSIDERATIONS OVERLOOKED.
- C UNLESS NOTED OTHERWISE ALL WIRING AND CONDUITS TO BE CONCEALED.
- D ALL ELECTRICAL EQUIPMENT (LIGHTING FIXTURES, POWER EQUIPMENT AND CABLES) OR ANY OTHER CONTRIVANCE THAT GENERATES EITHER ELECTROMAGNETIC FIELD OR ELECTROMAGNETIC INTERFERENCE ARE TO BE KEPT AT LEAST 12" AWAY FROM THE COMMUNICATION CABLE TRAYS. INSTALL ELECTRICAL EQUIPMENT AND CABLES TO CONFORM TO THE ABOVE REQUIREMENTS.
- E ALL FIRE ALARM ZONE LABELLING TO BE COORDINATED WITH SPRINKLER SYSTEM NOMENCLATURE. LOCATION FOR SUPERVISORY VALVES, FLOW SWITCHES AND LOSS OF PRESSURE TO BE COORDINATED WITH MECHANICAL TRADE. REFER TO MECHANICAL FIRE PROTECTION DRAWINGS, FIRE ALARM RISER DIAGRAM AND FIRE ALARM ZONE ANNUNCIATOR SCHEDULE.

DRAWING KEYNOTES


NORR

NORR Architects & Engineers Limited
An Ingenium Group Company
175 Bloor St. East
North Tower, 15th Floor
Toronto, ON, Canada M4W 3R8
norr.com

key plan

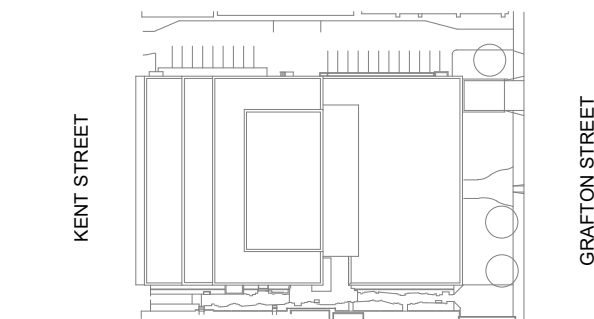

project and true North

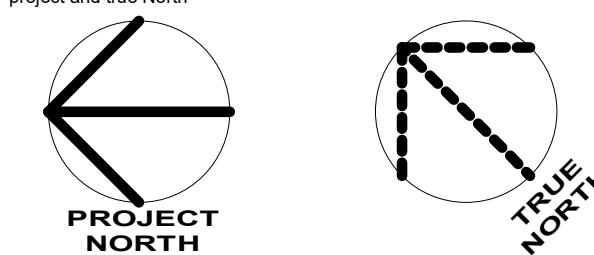

project legend



0 ISSUED FOR TENDER 2022-05-27

revisions date

project
**DANIEL J MACDONALD
MODERNIZATION**

161 GRAFTON STREET
CHARLOTTETOWN, PEI, C1A 1L1

drawing
**FIRE ALARM PLAN -
PARKING LEVEL**

designed NORR compu
date 01/02/19
drawn NORR dessiné
date 01/02/19
approved SR approuvé
date 2022-05-27
Tender Soumission
PWGSC Project Manager Administrateur de projets TPWSC
project number no. du projet
R.056687.005
drawing no. no. du dessin
E30-00