



PLAN

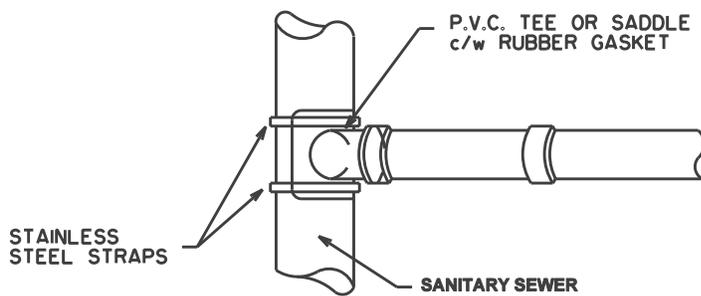

SADDLE CONNECTION DETAIL

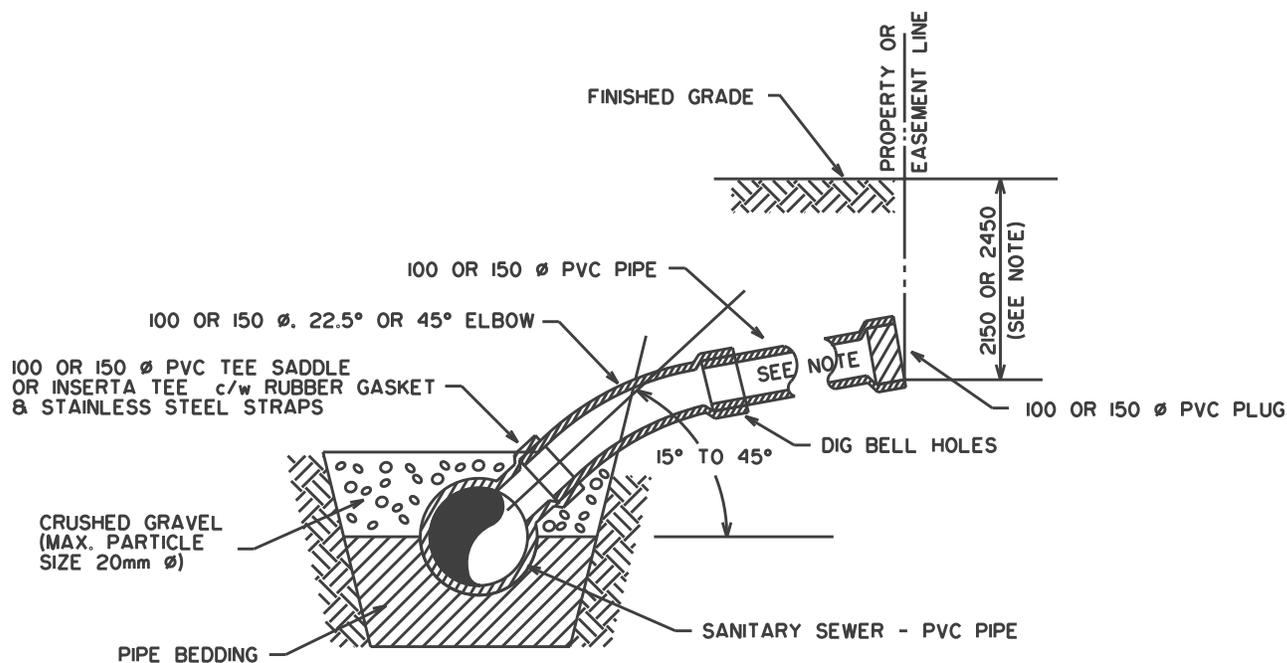

SECTION A-A

FOR SEWERS LESS THAN 3700 DEEP

- NOTE:
- 150 Ø SERVICES AT MIN 1%
  - 100 Ø SERVICES AT MINIMUM 2%
  - ALL P.V.C. PIPE TO BE MUNICIPAL STUB SEWER PIPE, A.S.T.M. D3034, DR 28
  - WHEN LOT SLOPES FROM BACK TO FRONT, THE DEPTH AT P/L TO BE 2150.
  - WHEN LOT SLOPED FRONT TO BACK, THE DEPTH AT P/L TO BE 2450.
  - SEWER SERVICES MUST TERMINATE WITH A BELL END
  - SADDLES TO BE 400mm APART MIN.
  - ALL DIMENSIONS ARE IN MILLIMETERS

REVISED	 <p style="text-align: center;"><b>CITY OF</b> <i>Lethbridge</i> <b>INFRASTRUCTURE SERVICES</b></p>	DRAWN	P.R.A.
		CHECKED	
		APPROVED	
		SCALE	N.T.S.
		DATE	97/03/10
		DWG NO	S-08
P.V.C. SEWER SERVICE CONNECTION FOR MAINS LESS THAN 3.7 DEEP			