

EROSION CONTROL NOTES:

INSTALL CB INLET PROTECTION IN ALL NEW CBs. REMOVE ONCE TRIBUTARY AREA IS NO LONGER PRODUCING SEDIMENT.

PRIOR TO A RAIN EVENT FORECAST TO BE GREATER THAN 15mm, TAKE THE FOLLOWING PRECAUTIONS:

- COVER ALL STOCKPILES WITH PLASTIC TARPS,
- COVER ALL AREAS OF EXPOSED SOIL WITH HAY MULCH OR MINIMUM 6" OF SUBBASE,
- BACKFILL OPEN EXCAVATIONS TO MAXIMUM EXTENT POSSIBLE
- SWEEP ASPHALT, ON SITE AND IN THE STREET, IF SEDIMENT IS PRESENT, AND
- INSPECT ALL CONTROL MEASURES AND PERFORM MAINTENANCE AS NECESSARY.



AFTER A RAIN EVENT GREATER THAN 15mm:

- REMOVE BUILT UP SEDIMENT FROM THE CONTROL MEASURE,AND
- INSPECT ALL CONTROL MEASURES AND PERFORM MAINTENANCE AS NECESSARY.


ALL EROSION AND SEDIMENT CONTROL MEASURES MUST REMAIN IN PLACE UNTIL THE AREA IS STABILIZED AND DEEMED NO LONGER SEDIMENT PRODUCING. ALL CONTROL MEASURES WILL BE CLEANED OF SEDIMENT AND DECOMMISSIONED IN A WAY THAT DOES NOT RELEASE SEDIMENT TO THE ENVIRONMENT.

SWEEP TRACKED SEDIMENT FROM ALL ADJACENT STREETS AT THE END OF EACH DAY.


SCHEDULE TASKS TO MINIMIZE THE EXPOSURE OF SOIL. STABILIZED DISTURBED AREAS BY THE END OF THAT WORK DAY. INSTALL THE STORM SEWER SYSTEM AS EARLY AS POSSIBLE IN THE PROJECT TO COLLECT AND CONTROL RUNOFF.

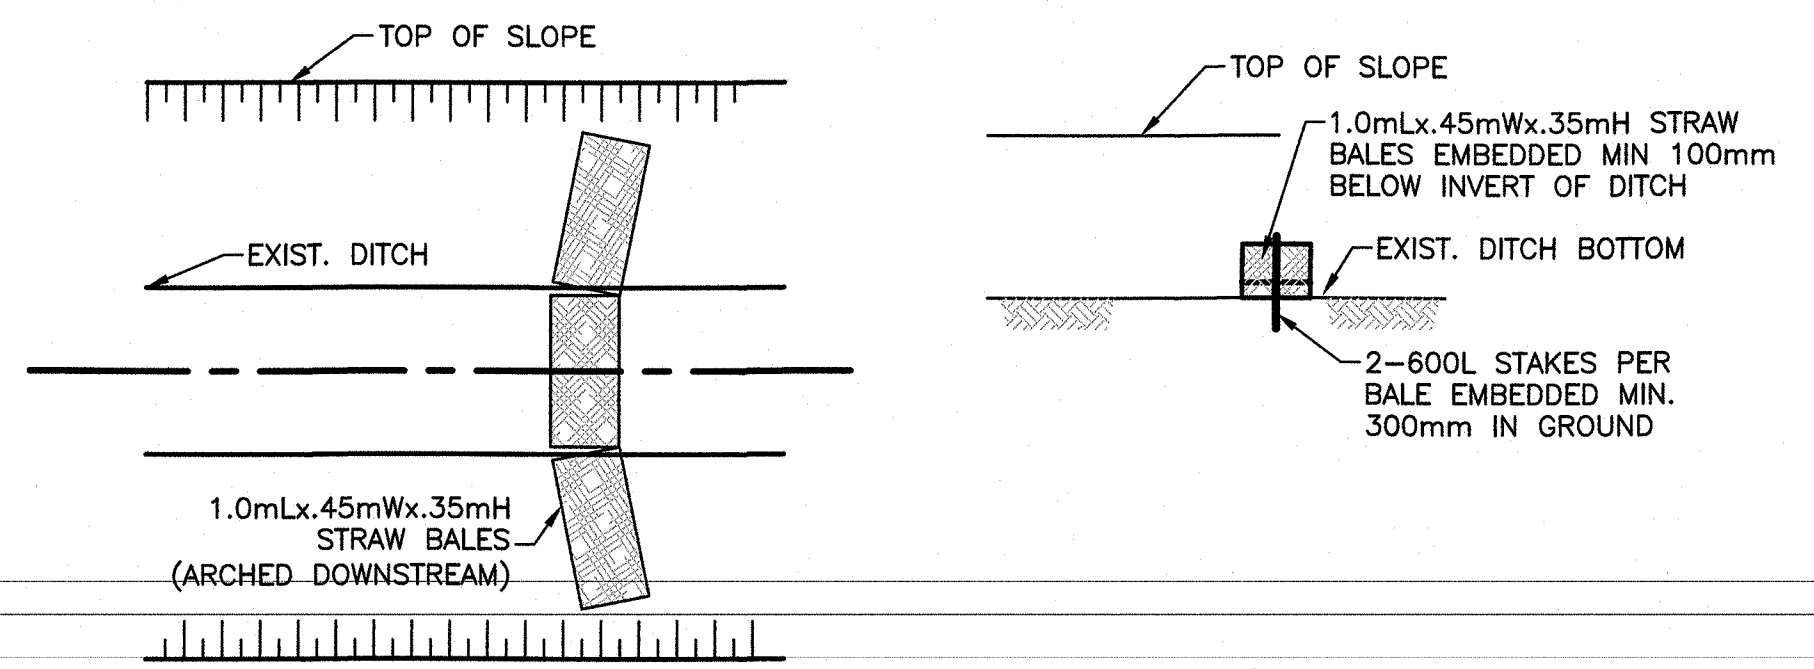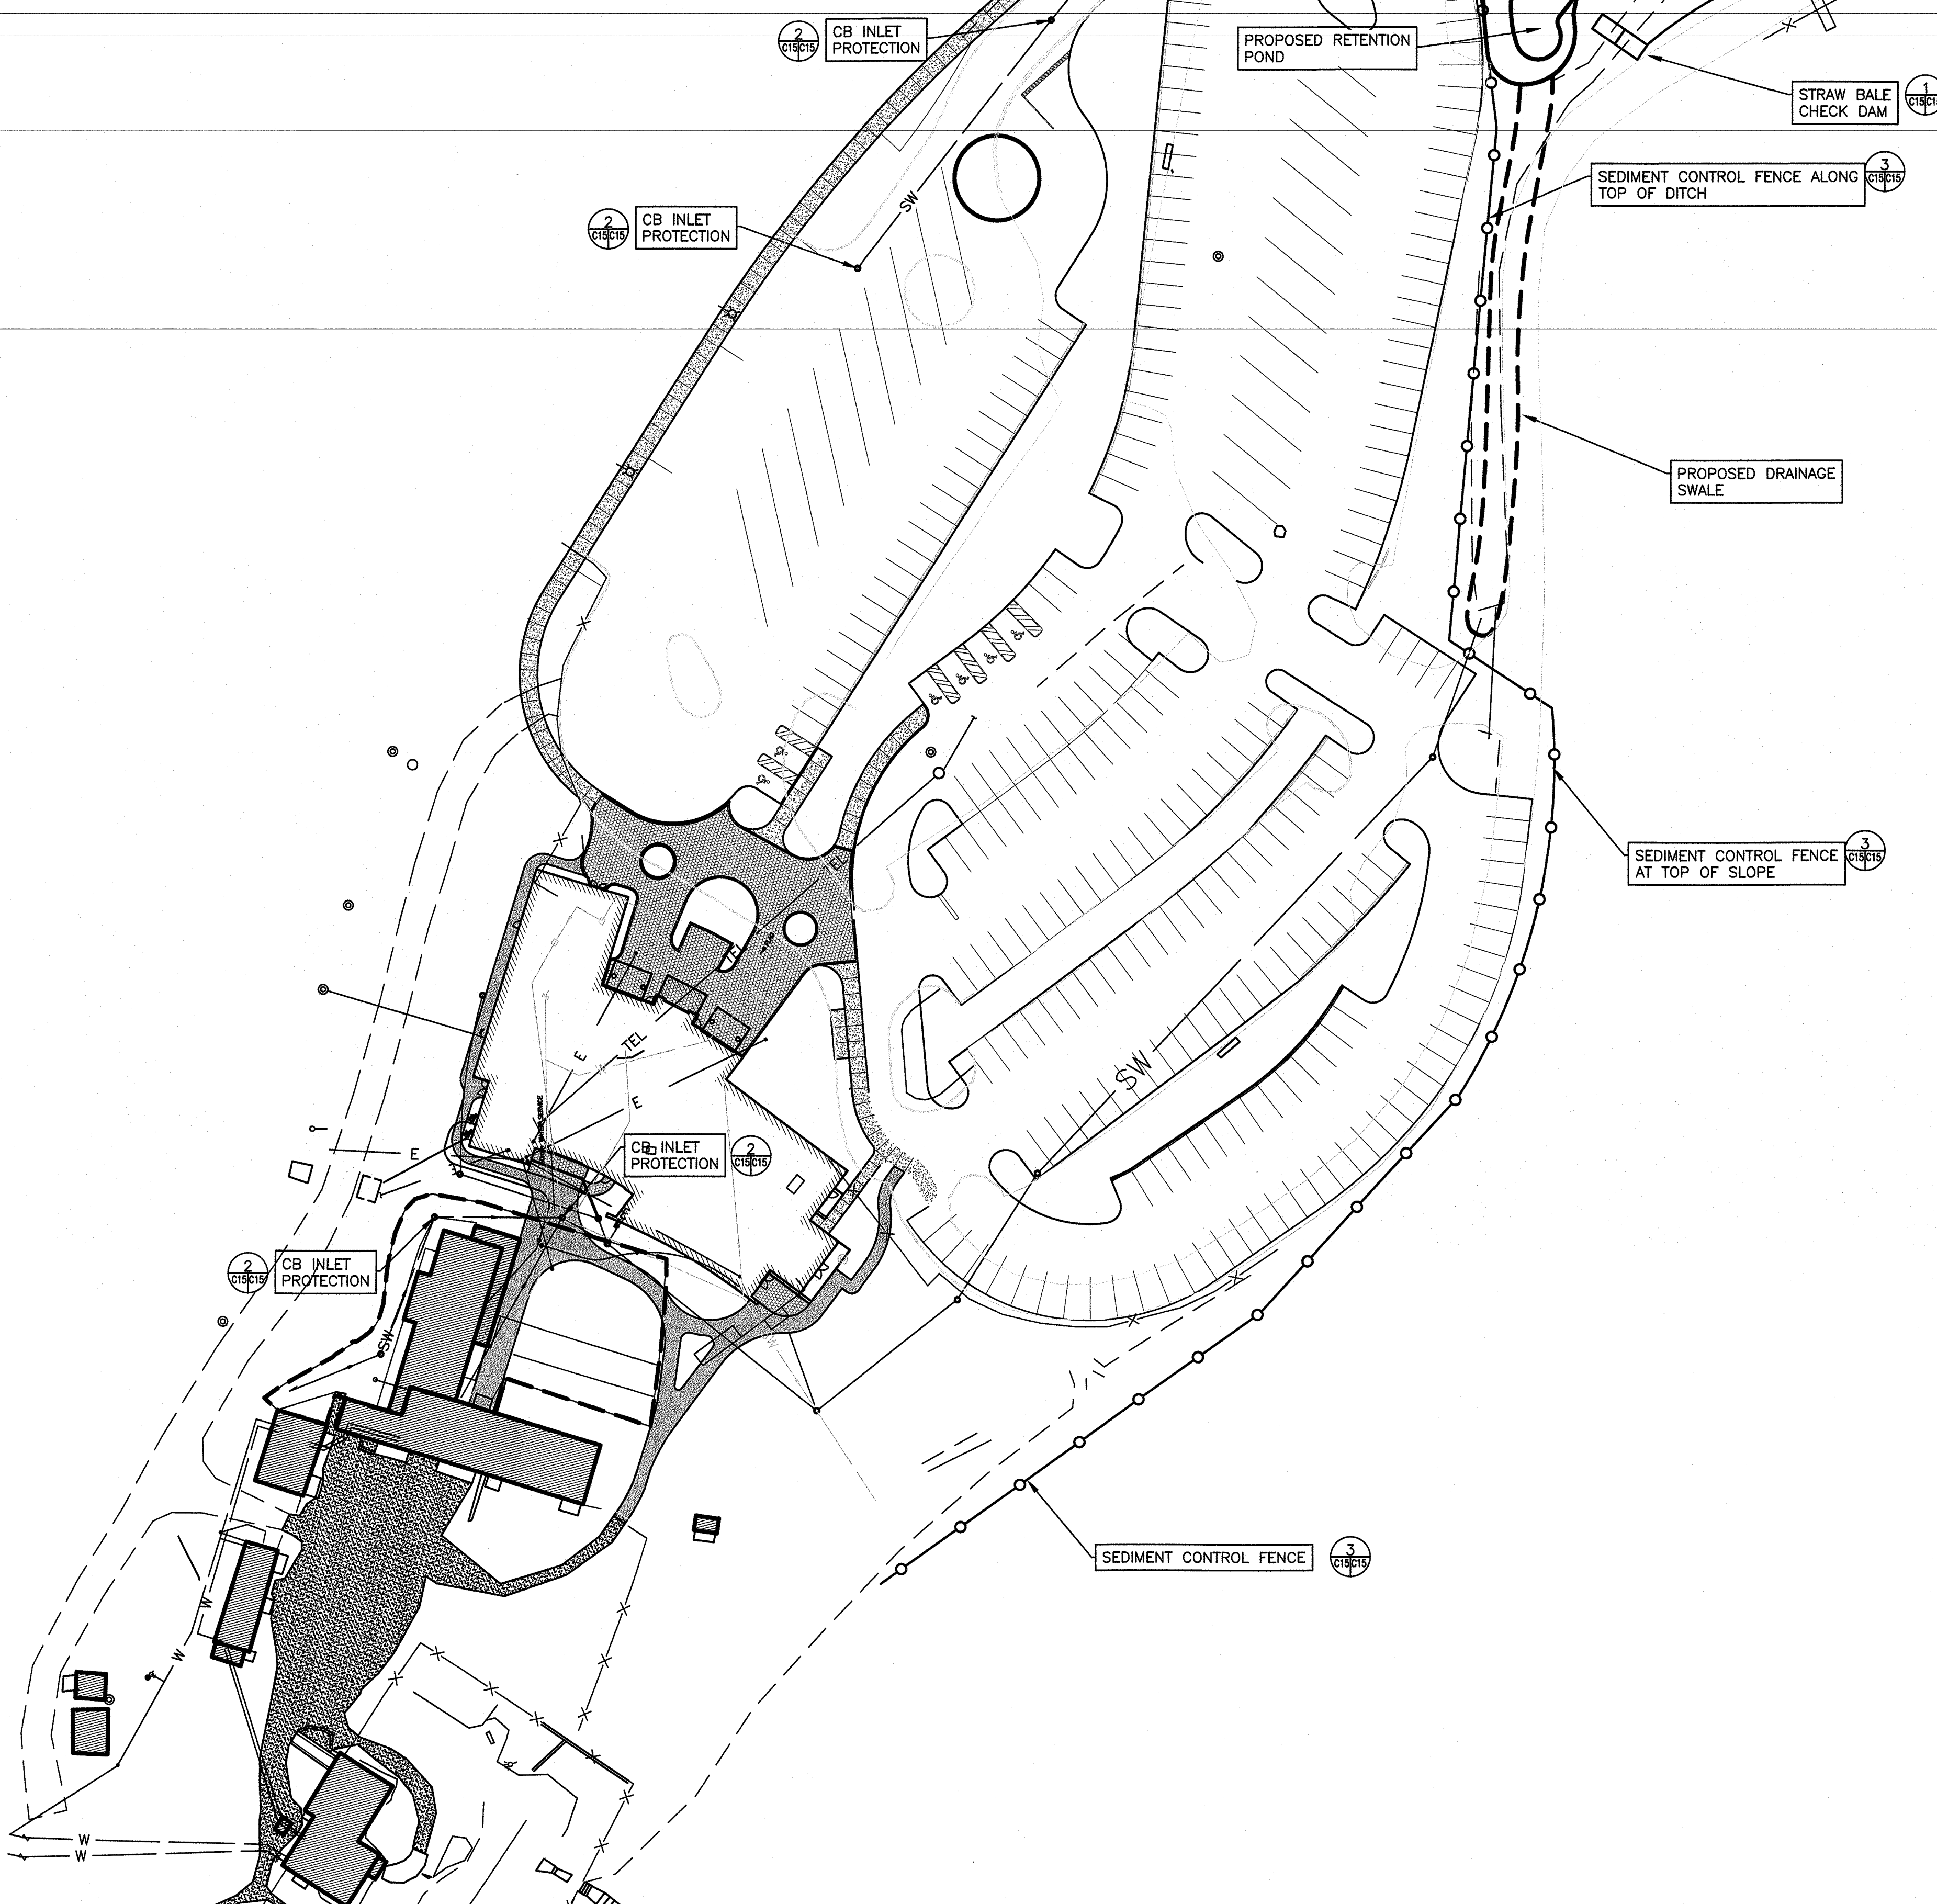

STRAW BALE CHECK DAMS 2 C15C15

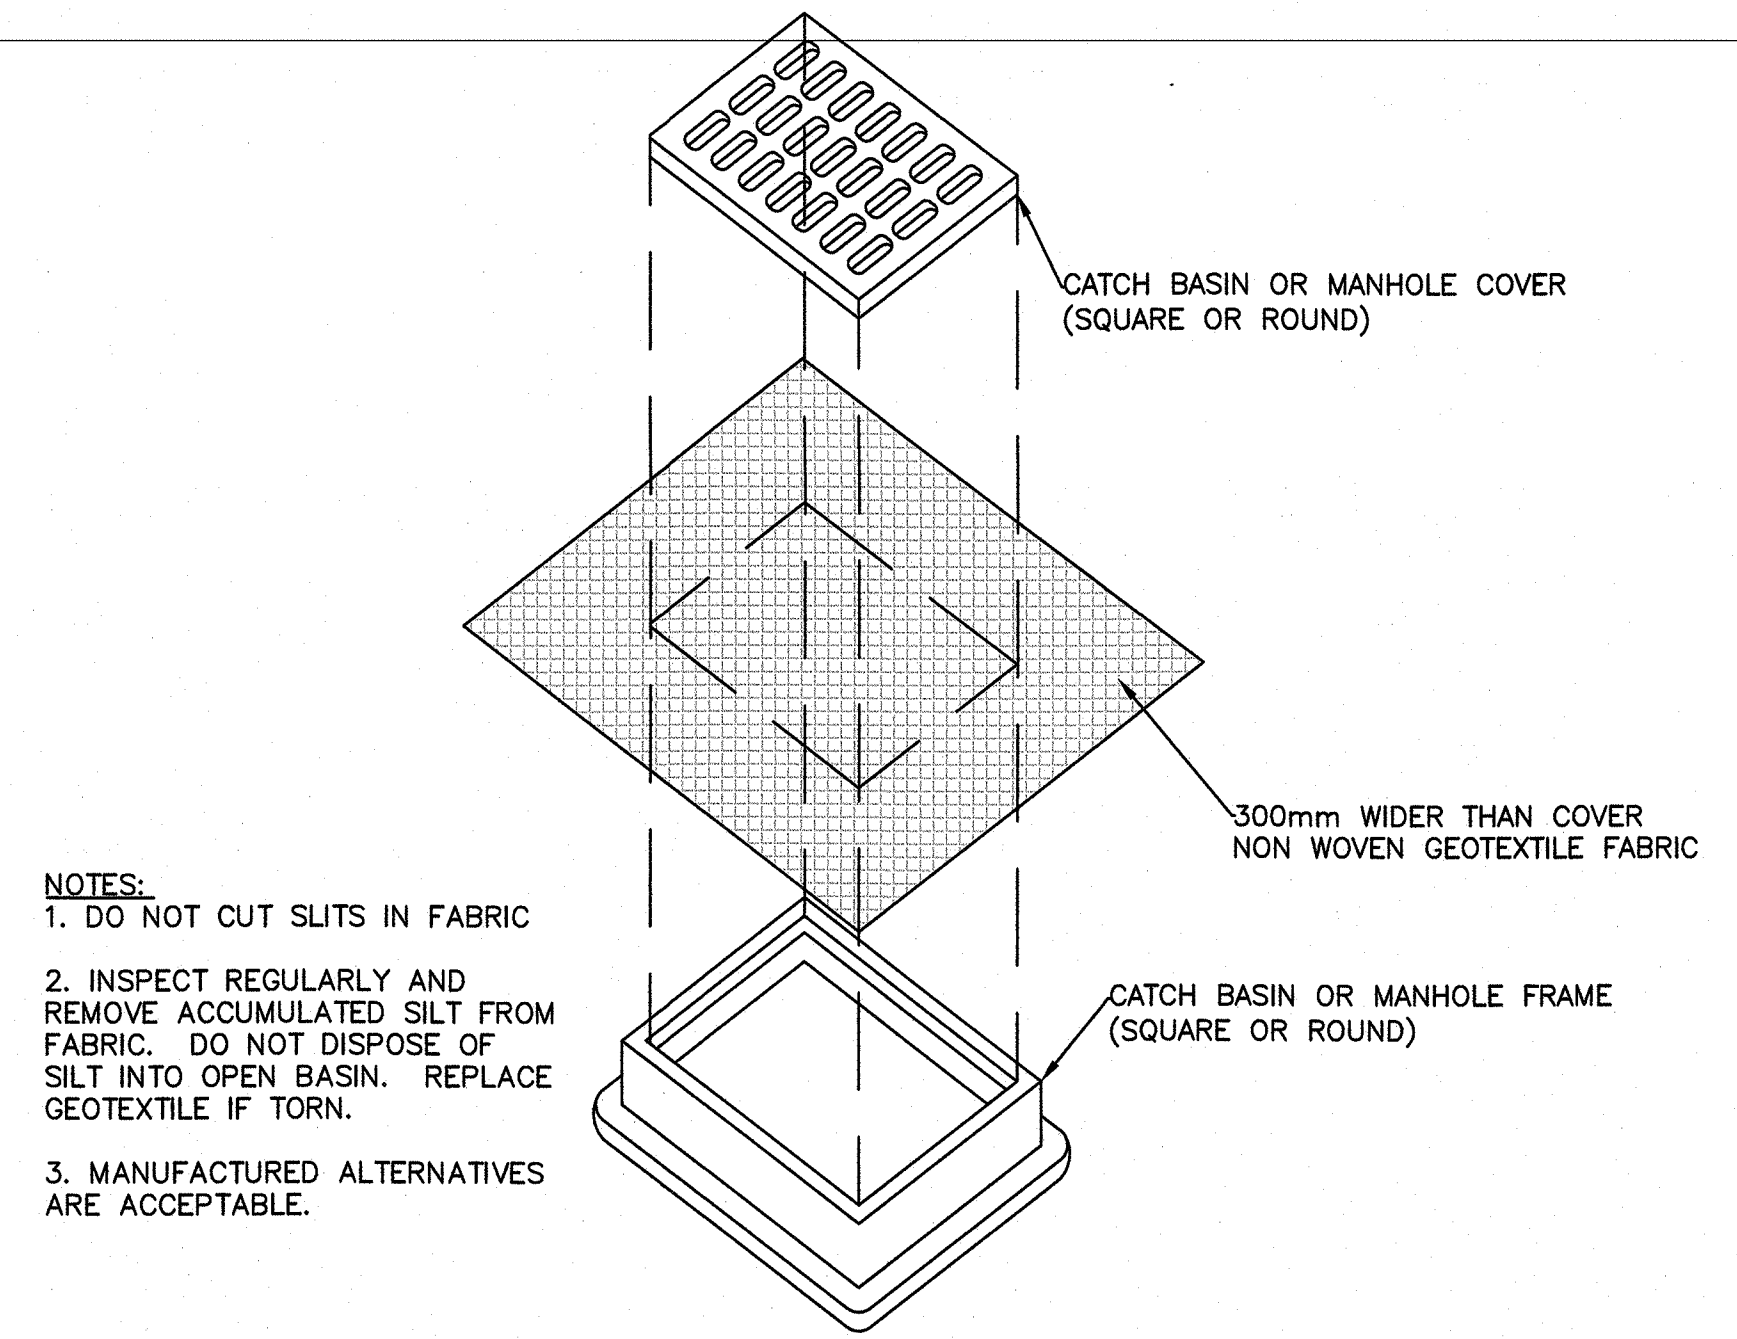


CATCH BASIN INLET CONTROL 3 C15C15

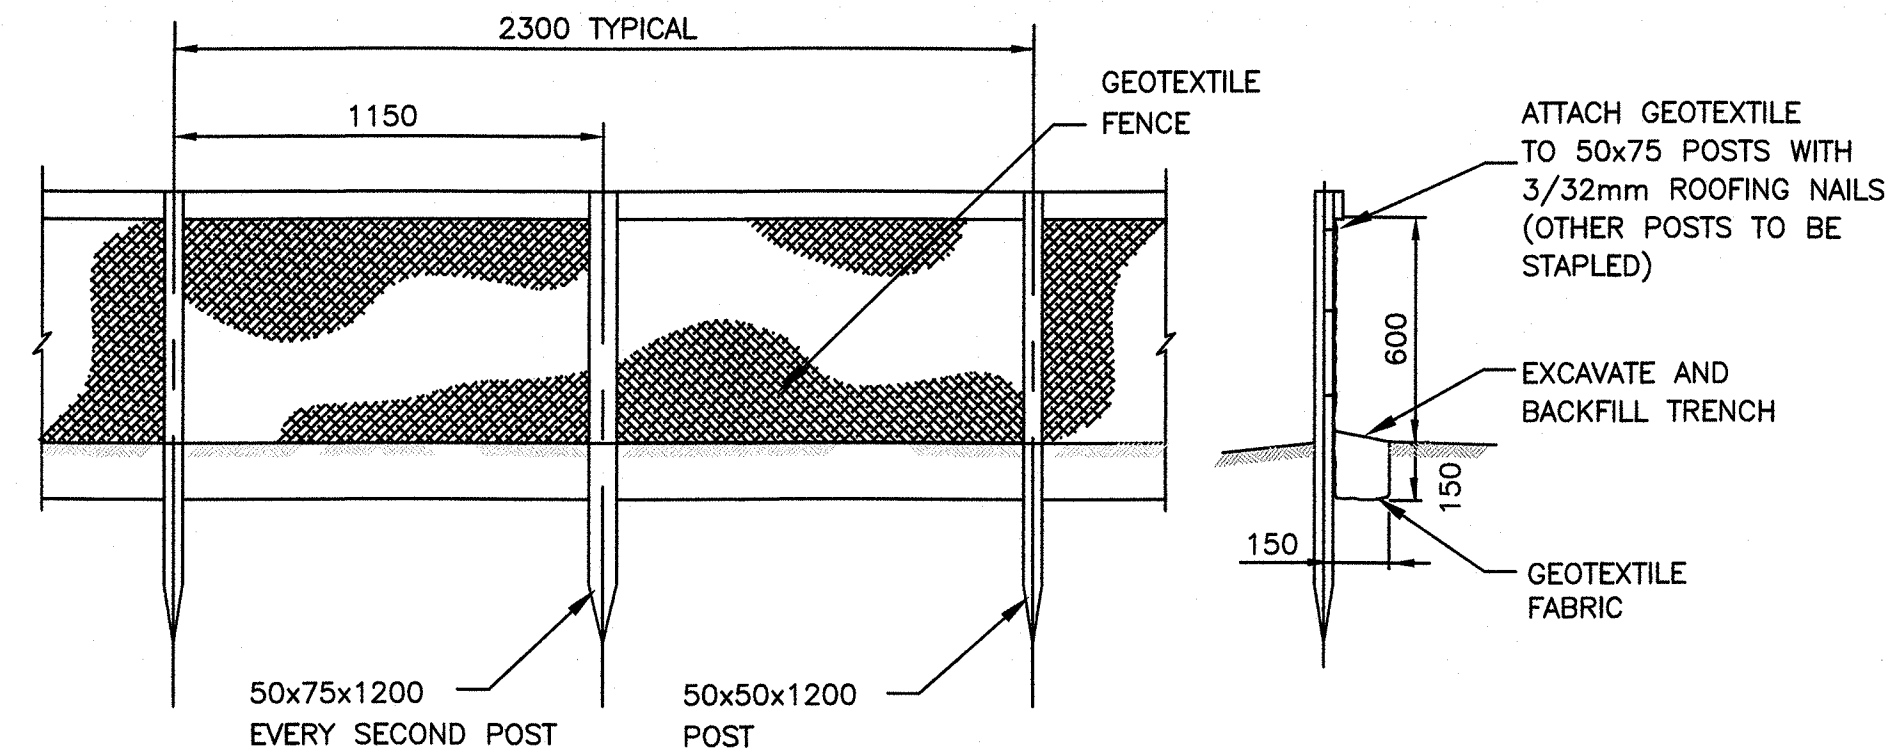

- NOTES:
1. MINIMIZE JOINTS IN GEOTEXTILE. WHERE REQUIRED SPlice TOGETHER ON SUPPORT STAKES WITH MINIMUM 150mm OVERLAP.
 2. DUE TO THE SLOPES IT IS IMPORTANT THAT THE SEDIMENT FENCE IS PROPERLY INSTALLED. EXCAVATION WORK WILL NOT COMMENCE UNTIL THE SEDIMENT FENCE INSTALLATION HAS BEEN APPROVED BY THE DEPARTMENTAL REPRESENTATIVE.

SEDIMENT CONTROL FENCE 4 C15C15

EROSION CONTROL PLAN 1 C15C15

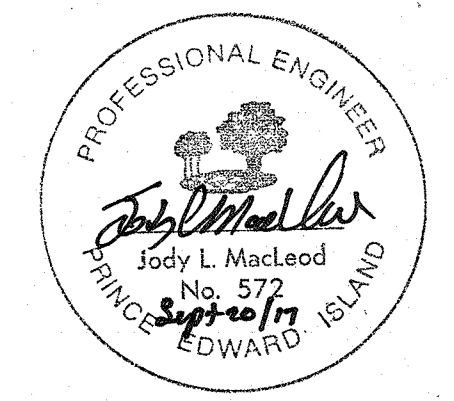

5	ISSUED FOR TENDER	09.15 2017
4	RS4 - 100% SUBMISSION	09.01 2017
3	RS4 - 99% SUBMISSION	06.30 2017
2	RS4 - 66% SUBMISSION	05.31 2017
1	RS4 - 33% SUBMISSION	04.30 2017
0	RS3 SUBMISSION	03.31 2017
revisions		date

project GREEN GABLES-PHASE 2 NEW VISITOR CENTRE QUEENS CO., PEI

drawing CIVIL EROSION AND SEDIMENT CONTROL

designed BT	conçu
date APR-2017	
drawn MT	dessiné
date APR-2017	
approved	approuvé
date	
Tender	Soumission
PWOSC Project Manager	Administrateur de projets TPSCC
project number R.081199.001	no. du projet
drawing no. C15 OF 20	no. du dessin