SURVEY PLAN OF DISTRICT LOT 7042, CASSIAR DISTRICT.

B.C.G.S. 93 M . 047 6403029

SCALE: 1 : 1250

25 0 25 50 75 100

ALL DISTANCE ARE IN METRES UNLESS OTHERWISE INDICATED.

LEGEND

BEARINGS ARE ASTRONOMIC, DERIVED FROM SOLAR OBSERVATIONS TAKEN AT I.P.(1)

BEARINGS TO BEARING TREES ARE MAGNETIC.

(◎)	O.P.CON.	DENOTES OLD CONCRETE POST FOUND
⊗	P.P.	DENOTES PIPE POST SET
●	I.P.	DENOTES STANDARD IRON POST SET
○	TH.	DENOTES TRAVERSE HUB
	B.T.	DENOTES BEARING TREE
	hs	DENOTES HECTARES
	m^2	DENOTES SQUARE METRES
	CALC.	DENOTES CALCULATED

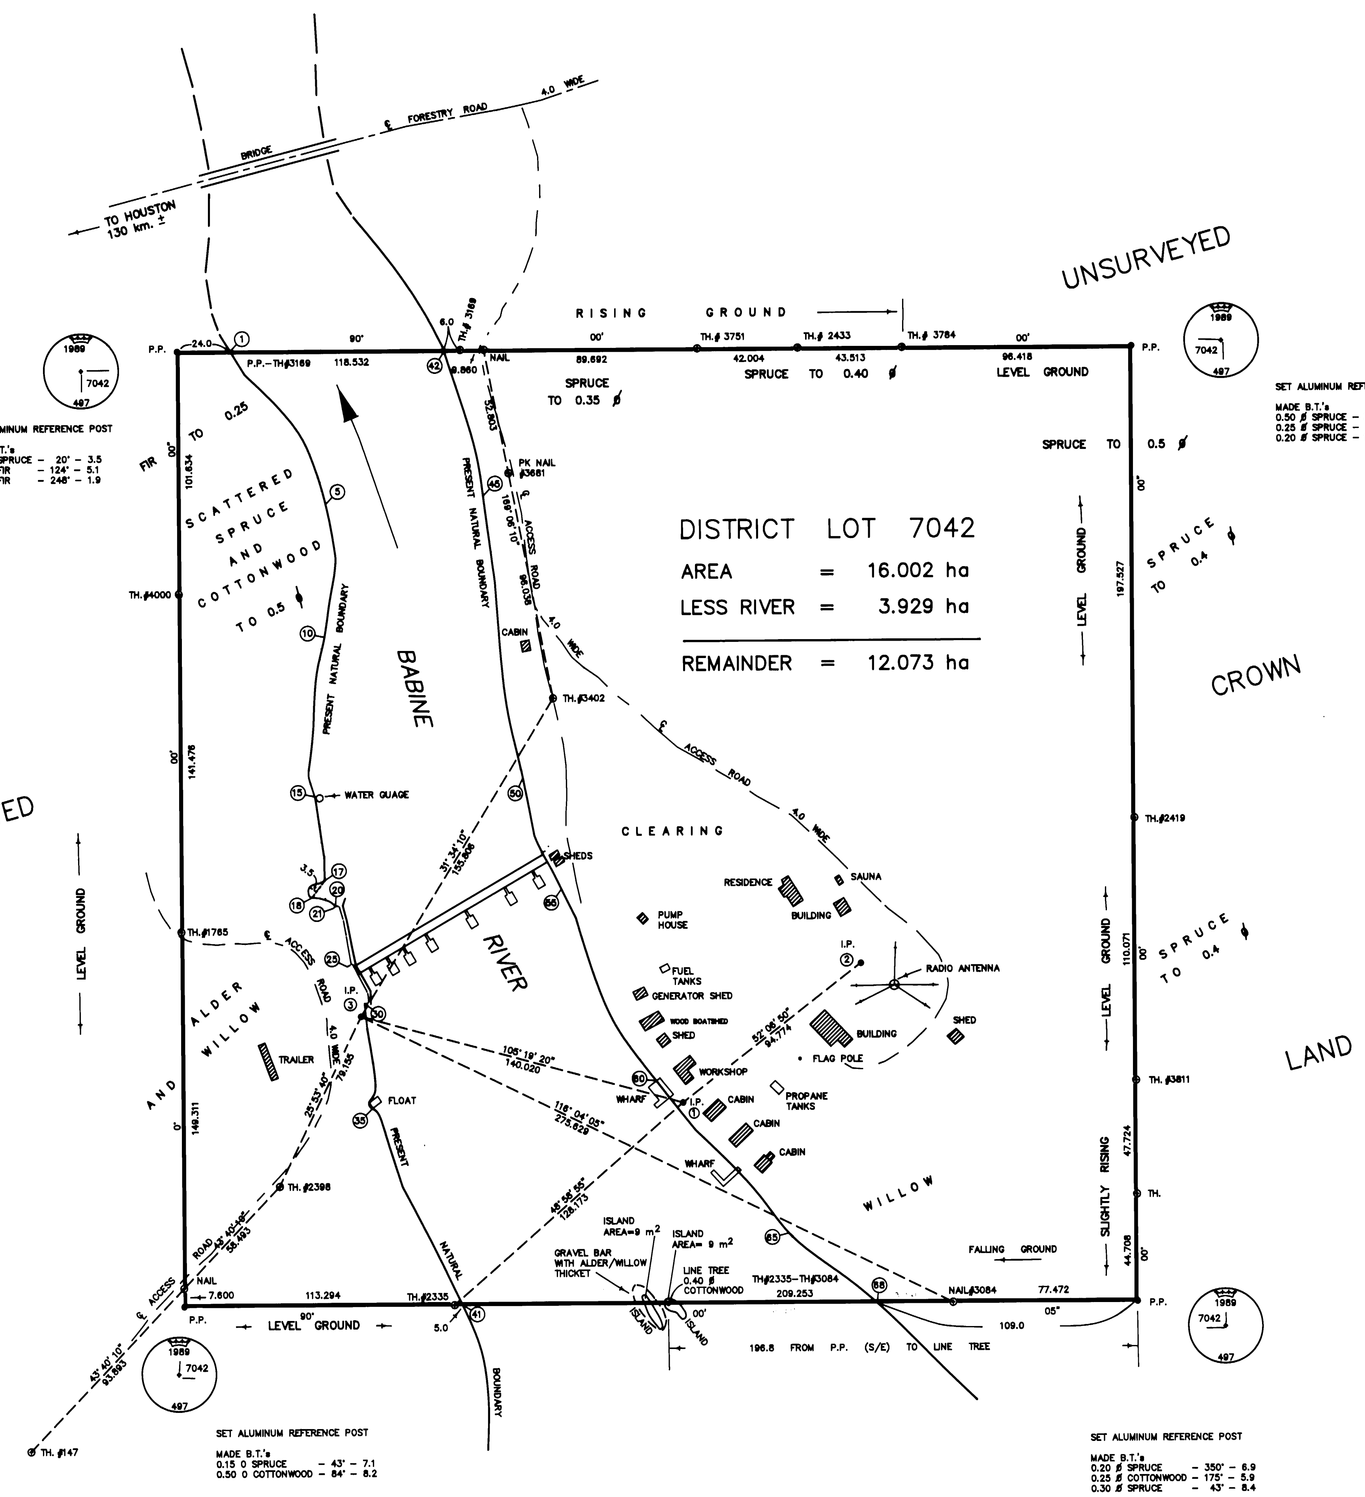

TRAVERSE TIE TO DISTRICT LOT 1600

SCALE: 1 : 5000

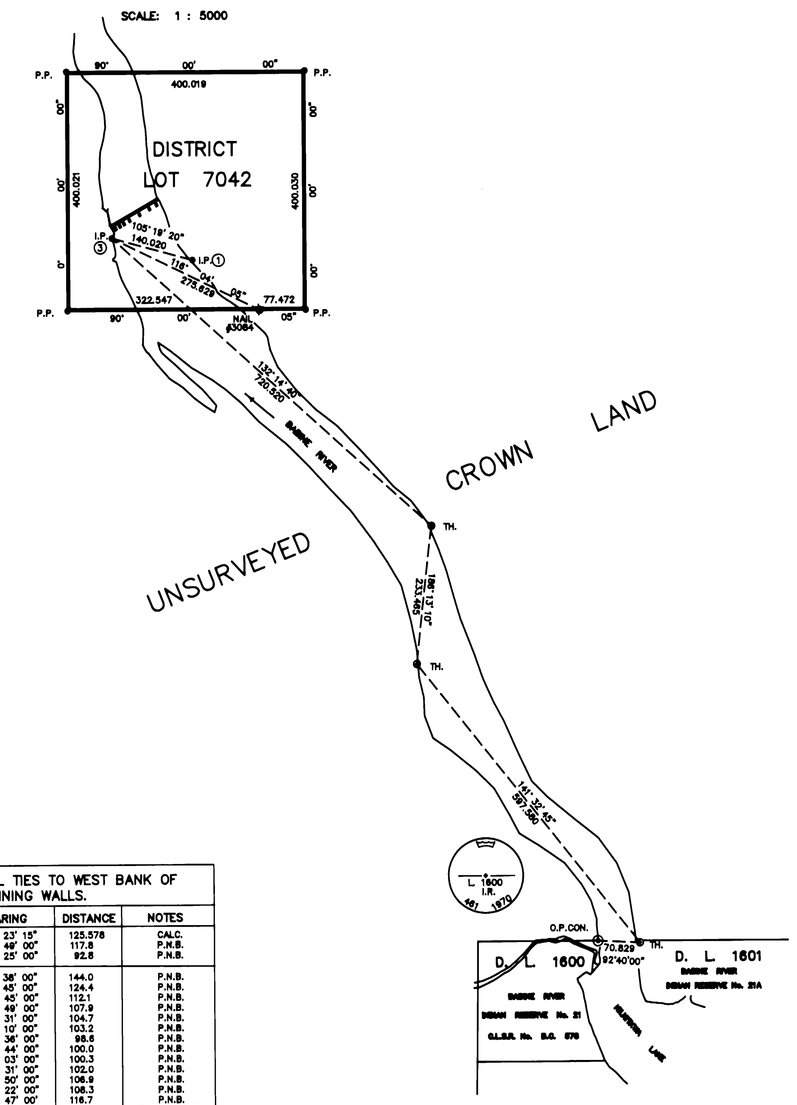

TABLE OF RADIAL TIES TO WEST BANK OF RIVER AND RETAINING WALLS.

FROM	TO	BEARING	DISTANCE	NOTES
P.K. NAIL ø3861	1	284° 23' 15"	125.578	CALC.
	2	280° 49' 00"	117.8	P.N.B.
	3	284° 25' 00"	92.8	P.N.B.
TH. ø3402	4	315° 38' 00"	144.0	P.N.B.
	5	310° 45' 00"	124.4	P.N.B.
	6	304° 45' 00"	112.1	P.N.B.
	7	302° 49' 00"	107.9	P.N.B.
	8	299° 31' 00"	104.7	P.N.B.
	9	295° 10' 00"	103.2	P.N.B.
	10	284° 36' 00"	95.8	P.N.B.
	11	277° 44' 00"	100.0	P.N.B.
	12	269° 03' 00"	100.3	P.N.B.
	13	260° 31' 00"	102.0	P.N.B.
	14	253° 50' 00"	106.9	P.N.B.
	15	247° 22' 00"	108.3	P.N.B.
	16	235° 47' 00"	116.7	P.N.B.
	17	231° 53' 00"	122.5	PNB at CREEK
	18	230° 50' 00"	131.1	PNB at CREEK
	19	228° 54' 00"	127.5	P.N.B.
	20	226° 46' 00"	126.2	PNB at LOG WALL
I.P. ø3	21	349° 56' 00"	41.2	LOG WALL
	22	348° 07' 00"	47.3	LOG WALL
	23	345° 59' 00"	34.4	LOG WALL
	24	348° 38' 00"	22.2	LOG WALL
	25	345° 01' 00"	21.7	
	26	351° 03' 00"	22.4	METAL SHEET RUNG WALL
	27	356° 01' 00"	17.8	
	28	15° 33' 00"	10.4	
	29	30° 12' 00"	6.6	
	30	15° 17' 00"	5.6	at PNB
I.P. ø1	31	283° 32' 00"	136.3	P.N.B.
	32	273° 37' 00"	128.6	P.N.B.
	33	271° 32' 00"	129.4	P.N.B.
	34	270° 18' 00"	133.0	P.N.B.
	35	269° 05' 00"	130.6	P.N.B.
	36	268° 51' 00"	127.3	P.N.B.
	37	263° 37' 00"	125.6	P.N.B.
	38	253° 38' 00"	123.0	P.N.B.
	39	239° 53' 00"	120.6	P.N.B.
	40	232° 21' 00"	123.4	P.N.B.
	41	228° 58' 55"	123.173	CALC.

TABLE OF RADIAL TIES TO EAST BANK OF RIVER

FROM	TO	BEARING	DISTANCE	NOTES
I.P. ø3	42	07° 40' 20"	281.424	CALC.
	43	09° 14' 00"	284.4	P.N.B.
	44	11° 59' 00"	242.7	P.N.B.
	45	13° 24' 00"	228.0	P.N.B.
	46	15° 30' 00"	206.5	P.N.B.
	47	17° 33' 00"	190.5	P.N.B.
	48	21° 01' 00"	165.4	P.N.B.
	49	30° 48' 00"	129.0	P.N.B.
	50	34° 57' 00"	120.3	P.N.B.
	51	44° 13' 00"	105.1	P.N.B.
	52	48° 28' 00"	103.8	PNB at FENCE
	53	48° 06' 00"	102.3	PNB at FENCE
	54	52° 05' 00"	101.3	PNB at FENCE
	55	58° 30' 00"	100.0	P.N.B.
	56	65° 49' 00"	99.3	P.N.B.
	57	77° 28' 00"	98.5	P.N.B.
	58	87° 39' 00"	102.4	P.N.B.
	59	94° 51' 00"	109.7	P.N.B.
	60	102° 36' 00"	128.9	P.N.B.
	61	105° 08' 00"	133.9	P.N.B.
	62	109° 08' 00"	148.4	P.N.B.
	63	112° 21' 00"	170.0	P.N.B.
	64	114° 54' 00"	186.8	P.N.B.
	65	117° 24' 00"	200.2	P.N.B.
	66	118° 15' 00"	219.8	P.N.B.
	67	118° 40' 00"	235.6	P.N.B.
	68	119° 16' 30"	247.897	CALC.

OFFICIAL PLAN

CONFIRMED
UNDER SECTION 67 LAND ACT
Deputy Surveyor General
VICTORIA, B.C. 16th. FEB.1990

I, A.J. WATTS, A BRITISH COLUMBIA LAND SURVEYOR, OF VANCOUVER, IN BRITISH COLUMBIA, CERTIFY THAT I WAS PRESENT AT AND PERSONALLY SUPERINTENDED THE SURVEY REPRESENTED BY THIS PLAN, AND THAT THE SURVEY AND PLAN ARE CORRECT. THE SURVEY WAS COMPLETED ON THE 25th. DAY OF JUNE 1989

B.C.L.S.

F.B. 386/89

THIS PLAN LIES WITHIN THE BULKLEY–NECHAKO REGIONAL DISTRICT.

PUBLIC WORKS CANADA
REAL ESTATE DIVISION, VANCOUVER
BABINE RIVER COUNTING FENCE
#2083 F.B. 276
DRAWN: LS DATE: 89-07-26

(E)BC2546

15T1477

165903