

Consultant's Name / Nom de l'expert-conseil: **Associated Engineering**
 Eng. Stamp / Sceau de l'ingénieur: [Blank]

APEGGA Permit to Practice P 3979

LEGEND

- GAS
- BURIED CABLE
- OVERHEAD POWER
- WATER
- SANITARY
- STORM
- FACILITY PERIMETER FENCE
- FENCE
- CONSTRUCTION BOUNDARY
- PROPOSED ASPHALT PAVING
- ASPHALT REMOVAL
- PROPOSED GRAVEL
- EDGE OF PAVEMENT WITH GRAVEL SHOULDER
- WATER HYDRANT
- TREES
- DRAINAGE SWALE
- LIGHT STANDARD
- WATER VALVE

No.	Description/Description	Date/Date
A	99% Review Submission	2014.08.13

Revision / Revision

A detail number / numéro de détail
 B source drawing no. / de dessin no.
 C detail on drawing no. / détail sur dessin no.


project: Correctional Service Canada / Service Correctionnel Canada

Dedicated Access Road
 Bowden Institution
 Innisfail, Alberta

drawing / dessin

CROSS SECTIONS

designed	Gautham Karri	concept
date	2014.07.24	
drawn	Marcel Revet	dessiné
date	2014.07.24	
reviewed	Steven Kennedy	révisé
date	2014.07.28	
approved	Graham Sterpam	approuvé
date	2014.07.28	
Tender	Steve Phipers	Soumission
PWGC Project Manager		Administrateur de Projets TPSGC
project number	R.042714.004	no. du projet
drawing no.	C-005	no. du dessin

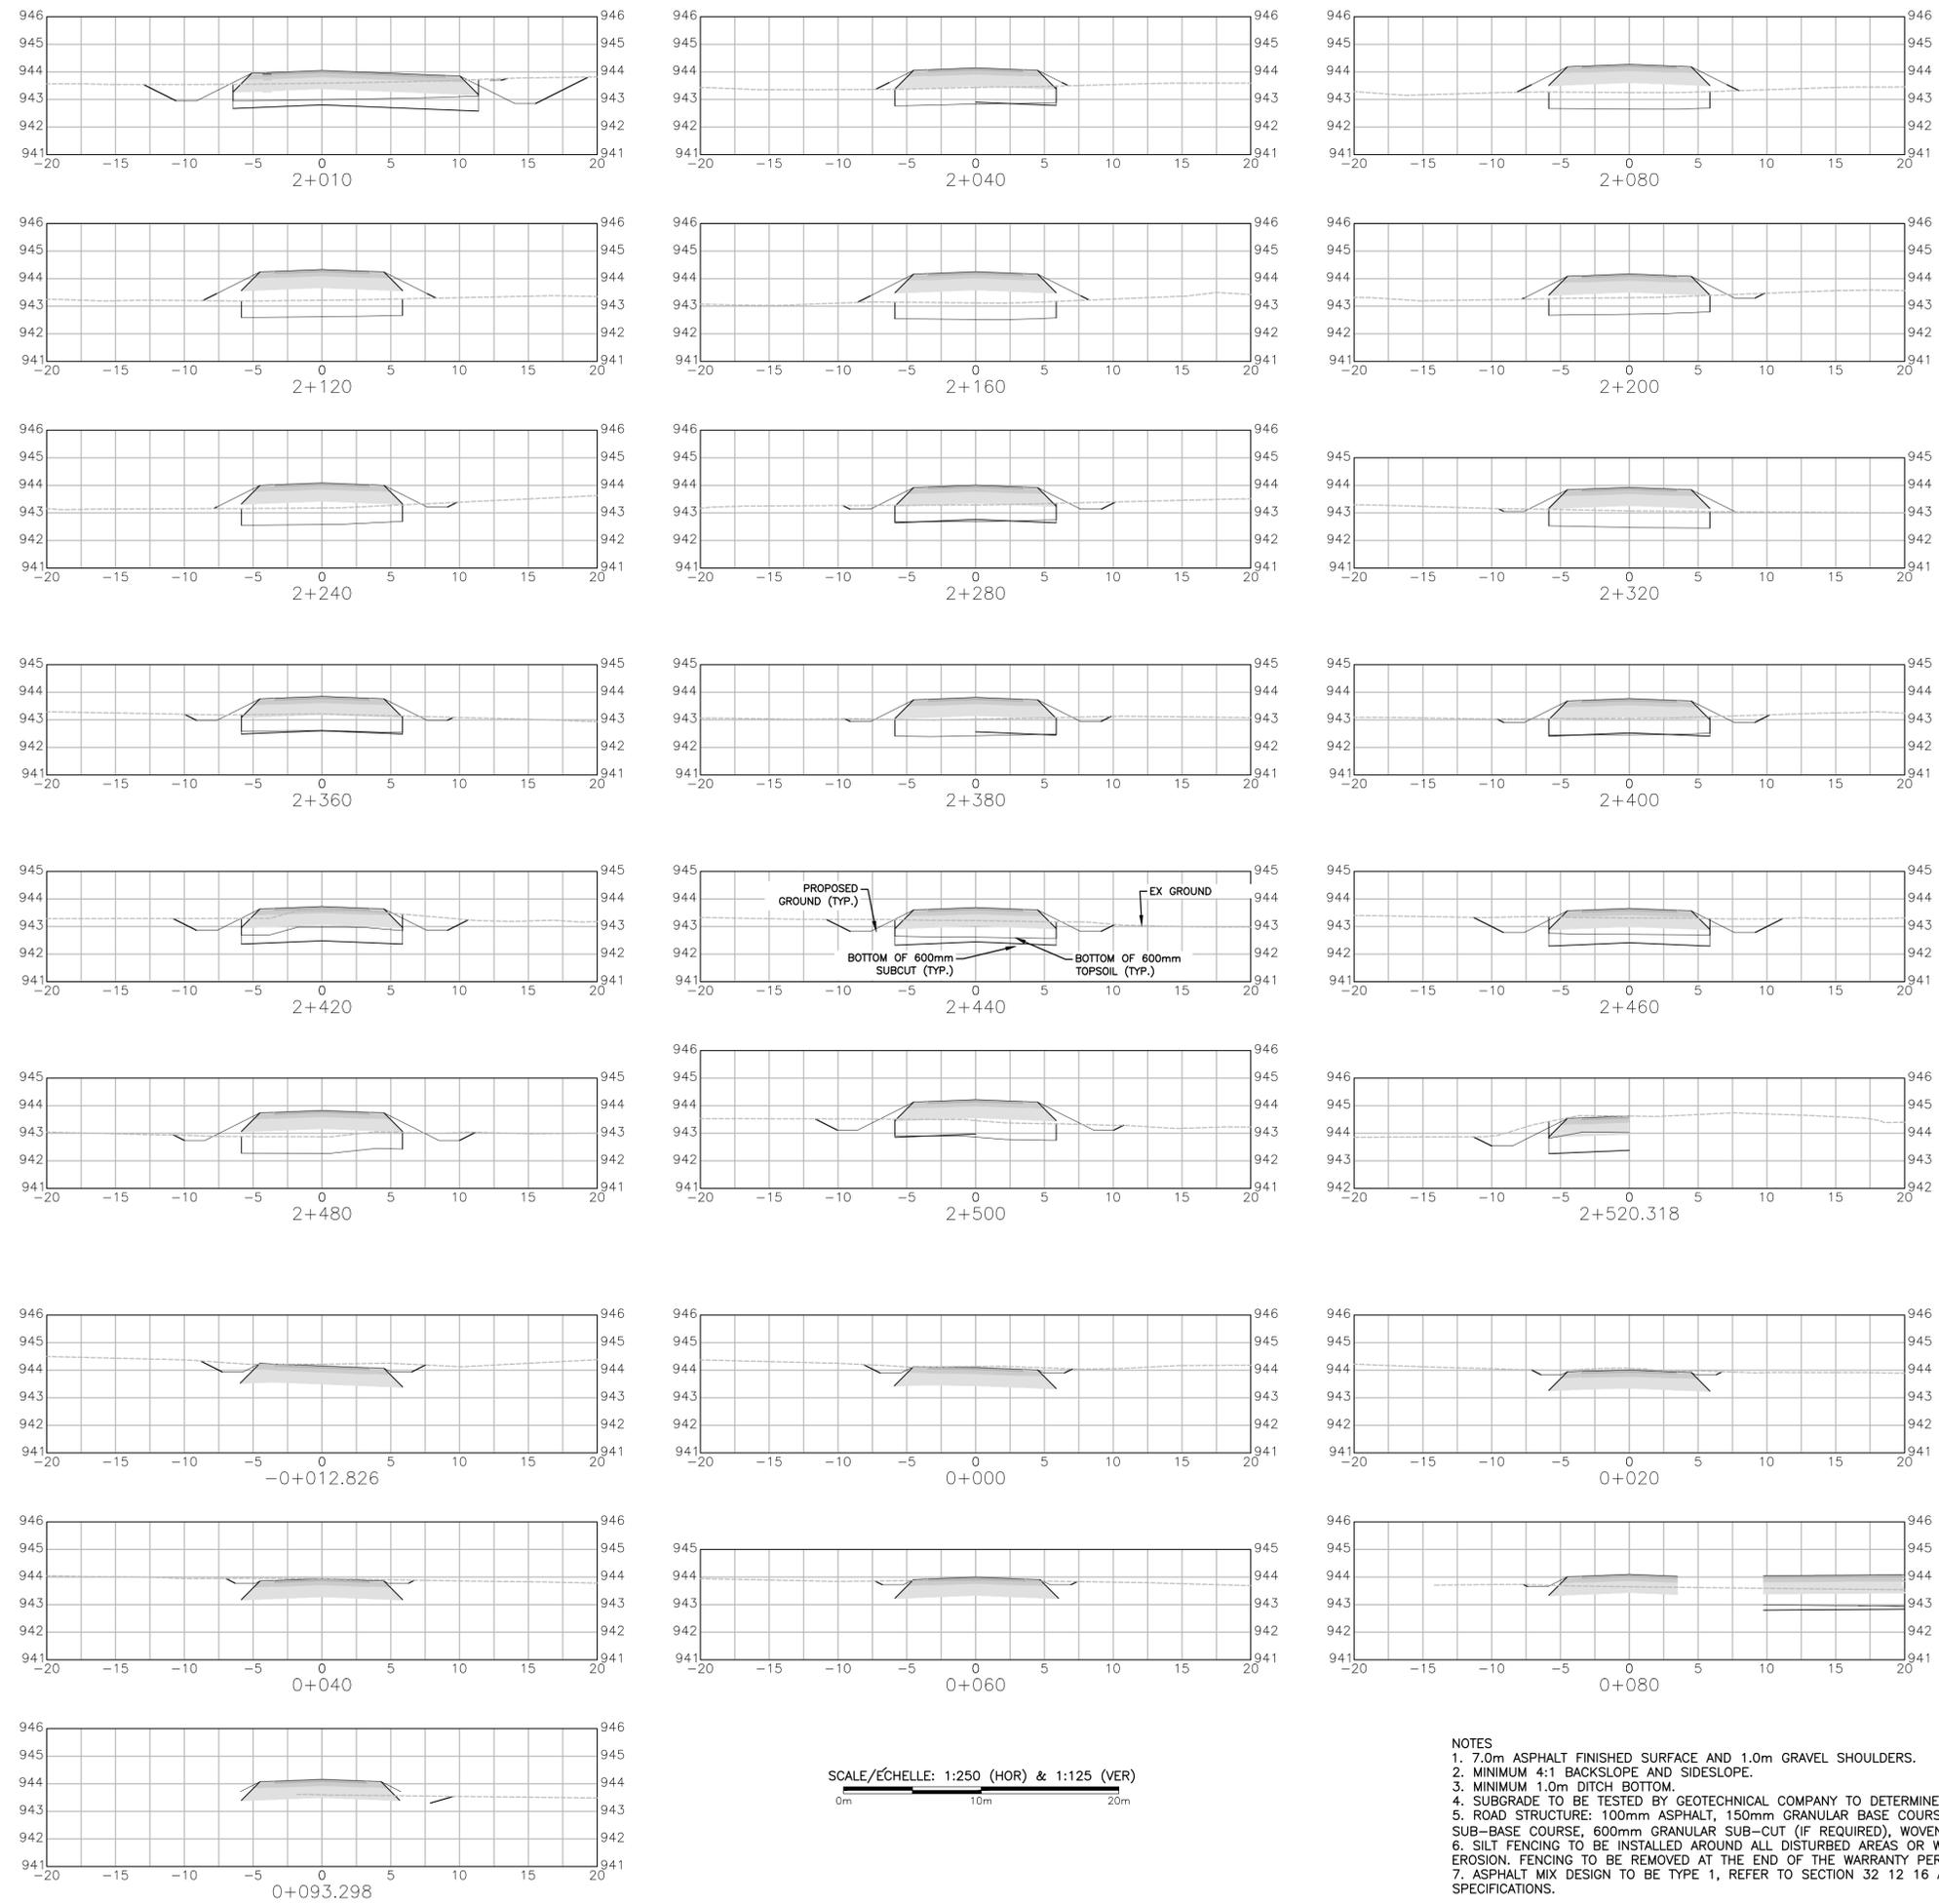

SCALE/ÉCHELLE: 1:250 (HOR) & 1:125 (VER)

- NOTES**
- 7.0m ASPHALT FINISHED SURFACE AND 1.0m GRAVEL SHOULDERS.
 - MINIMUM 4:1 BACKSLOPE AND SIDESLOPE.
 - MINIMUM 1.0m DITCH BOTTOM.
 - SUBGRADE TO BE TESTED BY GEOTECHNICAL COMPANY TO DETERMINE IF SUB-CUT IS REQUIRED.
 - ROAD STRUCTURE: 100mm ASPHALT, 150mm GRANULAR BASE COURSE, 400mm GRANULAR SUB-BASE COURSE, 600mm GRANULAR SUB-CUT (IF REQUIRED), WOVEN GEOTEXTILE.
 - SILT FENCING TO BE INSTALLED AROUND ALL DISTURBED AREAS OR WHERE REQUIRED TO PREVENT EROSION. FENCING TO BE REMOVED AT THE END OF THE WARRANTY PERIOD.
 - ASPHALT MIX DESIGN TO BE TYPE 1, REFER TO SECTION 32 12 16 ASPHALT PAVING FOR SPECIFICATIONS.

Time: 8:37am
 Date: Aug 14, 2014
 User: gkarr
 Xref: 3220-01-C-mp-base