


GREENHOUSE — CROSS SECTION

SCALE: 1:30

1
GH04

KEYED NOTES / NOTES AU PLAN

- 1- ALUM. GUTTER (TYP.)
- 2- ALUM. GLAZING ROOF BARS w/6mm FULLY LAMINATED GLASS UNITS w/FOUR SIDES EDGE SUPPORT
- 3- 1200mm RIDGE VENT FOR ALL COMPARTMENTS
- 4- 900mm CORRIDOR RIDGE VENT
- 5- ROOF PURLINS
- 6- TRENCH DRAIN - REFER TO MECHANICAL
- 7- FLOOR DRAIN (TYP.) REFER TO MECHANICAL
- 8- 100X100mm GALVANIZED HSS POST
- 9- 50mm FOAM SANDWICH PANEL
- 10- EVAPORATIVE COOLER
- 11- CONCRETE PAD FOR EVAPORATIVE COOLER, REFER TO STRUCTURAL
- 12- CONCRETE SLAB SLOPES TO DRAIN, REFER TO STRUCTURAL
- 13- POSITIVE PRESSURE FAN / NEGATIVE PRESSURE FAN, w/MOTORIZED DAMPER & PLEATED INSECT SCREEN
- 14- FOUNDATION WALL - REFER TO STRUCTURAL
- 15- GALVANIZED STEEL TRUSS
- 16- ROOF VENT MOTOR
- 17- ALUM. GLAZING BARS w/4mm FULLY TEMPERED GLASS UNITS
- 18- FIXED TOP BENCH WITH ADJUSTABLE HEIGHT - REFER TO BENCH DETAILS
- 19- 25mm FOAM SANDWICH PANEL
- 20- ALUM. GLAZING BARS w/25mm SEALED UNITS FOR ALL EXT. WALLS.
- 21- UNISTRUT 41mm FOR M&E SERVICES (915mm FFL)
- 22- ALUM. FIN ON ALUM. PIPE - 32mm
- 23- UNISTRUT 41mm FOR ALUM. FIN
- 24- (2) 4 TUBE T5 FLUORESCENT LIGHT FIXTURE 347V
- 25- VAF FAN
- 26- ALUM. HEATING PIPE - 32mm
- 27- EXISTING FOUNDATION WALL
- 28- EXISTING ALUM. GLAZING BARS w/25mm SEALED UNITS
- 29- EXISTING ALUM. GUTTER
- 30- 13mm Ø STAINLESS STEEL PIPE
- 31- HORIZONTAL SHADE MOTOR
- 32- HORIZONTAL SHADE
- 33- UNIT HEATER
- 34- HOT WATER MAINS
- 35- VETRICAL SHADE CLOTH
- 36- HORIZONTAL RUN OF DOWNSPOUT - INSULATED ALUM. PIPE, PROVIDE APPROPRIATE CLEANOUTS
- 37- CONCRETE PIER - REFER TO STRUCTURAL
- 38- 4 TUBE T5 FLUORESCENT LIGHT FIXTURE 347V

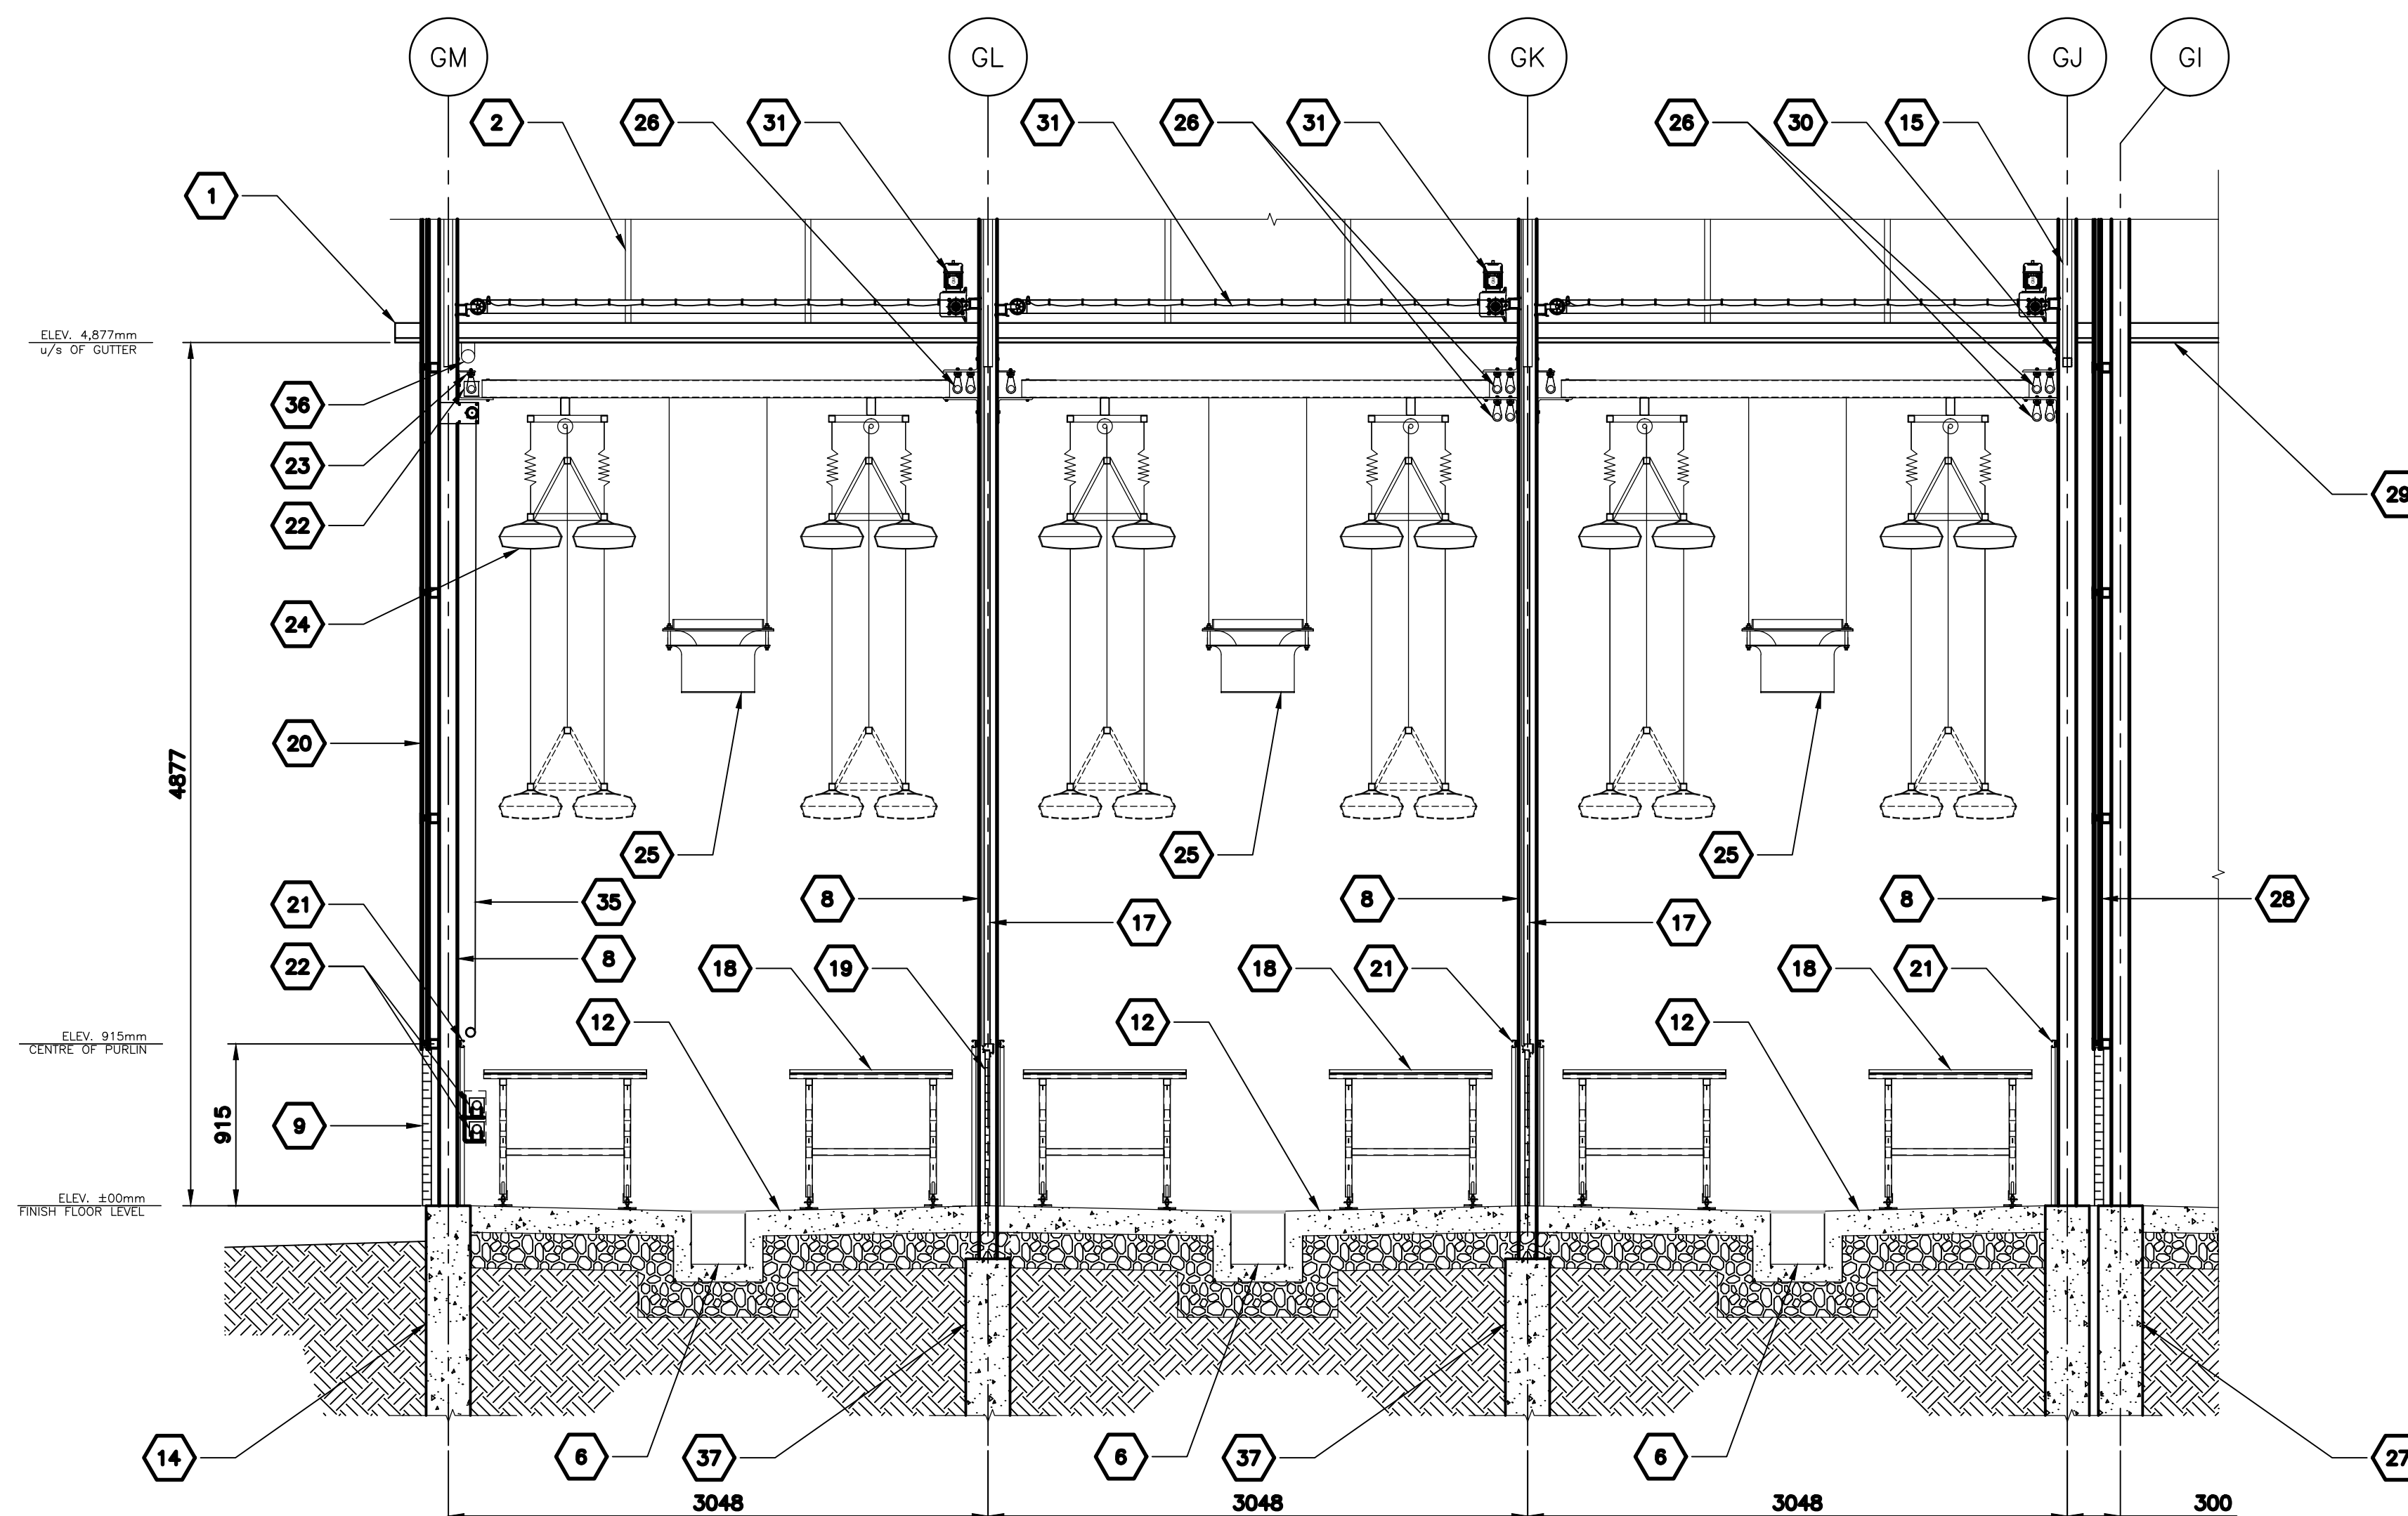

LONGITUDINAL SECTION

SCALE: 1:30

2
GH04