





PROPOSED ACCESS ROAD PROFILE 'A'
 HORZ: 1:500
 VERT: 1:50

PROPOSED ROAD CONSTRUCTION


- NOTES:**
1. CONTRACTOR TO CLEAR AND GRUB ACCESS ROAD 6.0m WIDE. EXCAVATE AND REMOVE ALL SHRUBS, BERRY BUSHES AND GROUND COVERINGS.
 2. EXCAVATE TO SUBGRADE (450mm) AND CONSTRUCT ACCESS ROAD AS INDICATED.
 3. IF BEDROCK IS ENCOUNTERED CONTRACTOR TO ADJUST ACCESS ROAD ELEVATIONS SO AS TO ENSURE A MINIMUM 150mm OF TYPE 1 GRAVEL HAS BEEN APPLIED.
 4. CONTRACTOR TO ENSURE THAT NO LOW AREAS ARE CREATED ON EITHER SIDE OF ACCESS ROAD TO TRAP DRIFTING SNOW.
 5. CONTRACTOR TO REUSE EXCAVATED MATERIAL TO FILL LOW AREAS AS INDICATED ABOVE.

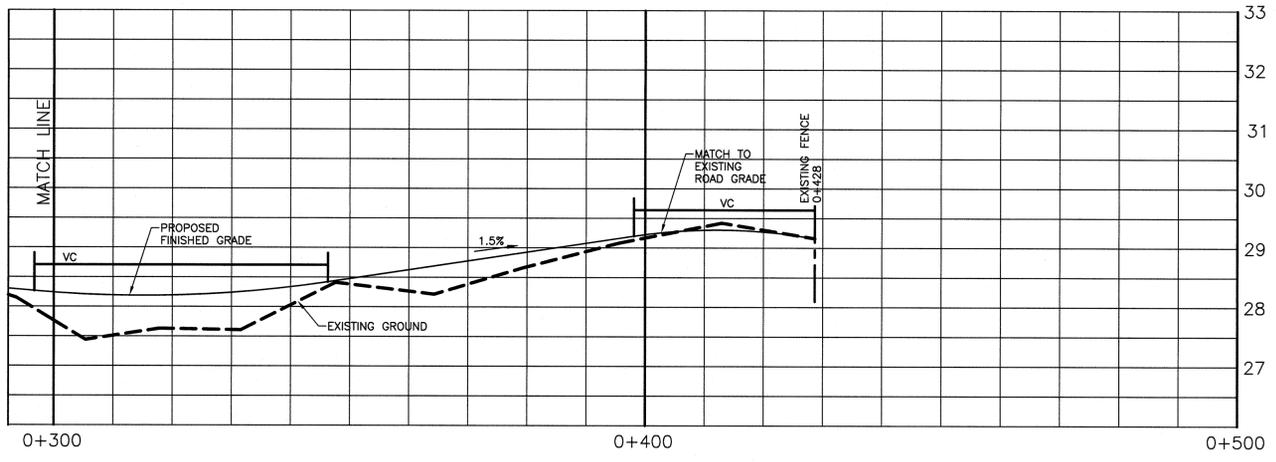

PROPOSED ACCESS ROAD PROFILE 'A' CONT'D
 HORZ: 1:500
 VERT: 1:50

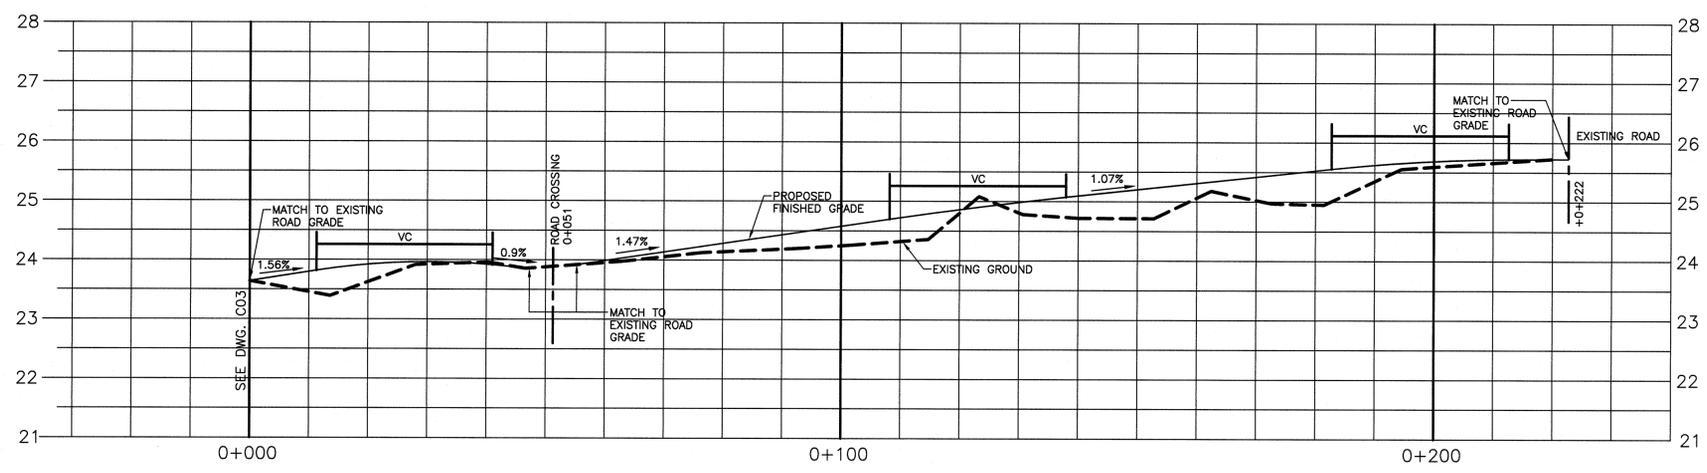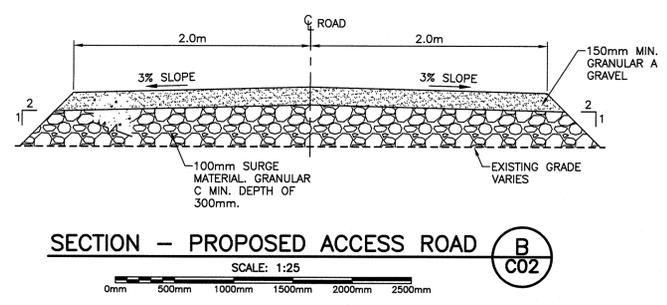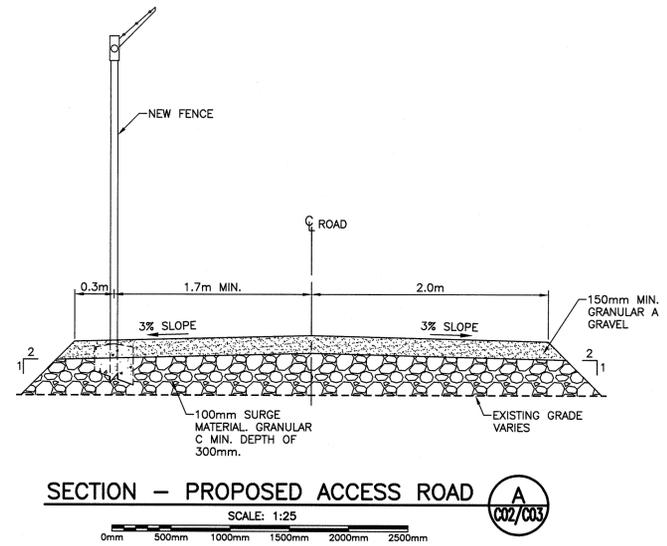

PROPOSED ACCESS ROAD PROFILE 'B'
 HORZ: 1:500
 VERT: 1:50



0	ISSUED FOR TENDER	JAN. 26 2017
revisions		date

project
**FENCE GATE REPLACEMENT
 ST. ANTHONY AIRPORT
 ST. ANTHONY
 NEWFOUNDLAND AND
 LABRADOR**

designed	KNW	conçu
date		
drawn	CK	dessiné
date		
approved	CSF	approuvé
date		
Tender		Submission
PWSSA Project Manager		Administrateur de projets TPS&C
project number		no. du projet
		R.083651.001
drawing no.		no. du dessin
		C05

