


ITEM NO	NO OFF	DESCRIPTION	DESIGNATION	SUPPLIER
1-2	2	DOUBLE PUMP	P330B - 2 x 1 1/2"	ENSIGN
3	1	RETURN FILTER	RFP 300F10 B.1.1	HYDRA-POWER
4	1	HYDRAULIC MOTOR	WM 76A - 2 1/2"	ENSIGN
5	1	LOAD CONTROL VLV	E2B300-Z-150-N	STERLING
6-9	4	LOAD CONTROL VLV	E2B60-T-N	STERLING
10-13	4	CHECK VALVE	31C90S	FLUID CONTROLS
14	1	RELIEF VALVE	R2V-24-333	DEHISON
15	1	HYDRAULIC BRAKE	O-022-519-23-002	OETLINGHAUSE
16-17	2	DIRECTIONAL CONTROL VLV	A35	ENSIGN
18-19	2	SUCTION STRAINER	SFE 180	HYDRA-POWER
20-21	2	CYLINDER		MAILHOT
22	1	MANIFOLD BLOCK	S 710564	S.D.A
23	1	MANIFOLD BLOCK	S 710563	S.D.A
24-25	2	MANIFOLD BLOCK	D 4069924.	S.D.A
26-27	2	MANIFOLD BLOCK	S 710819	S.D.A

HOSES

A - 3/4" BORE - MIN BURST 12,300 PSI - 3/4" SAE FLANGE / 1" J.I.C.
 B - 1" BORE - MIN BURST 9,400 PSI - 1" SAE FLANGE / 1" J.I.C.
 C - 1 1/4" BORE MIN BURST 7240 PSI - 1 1/4" SAE FLANGE / 1 1/4" J.I.C.
 A-B-C PARKER NO SKIVE HOSE 381 - SAE 100 R2AT

PIPING TO BE STAINLESS STEEL TO A316 GRADE
 ALL PIPING SIZES QUOTED ARE OUTSIDE DIAMETERS
 FITTINGS PARKER TRIPLE LOK FOR 37° FLARED TUBE.

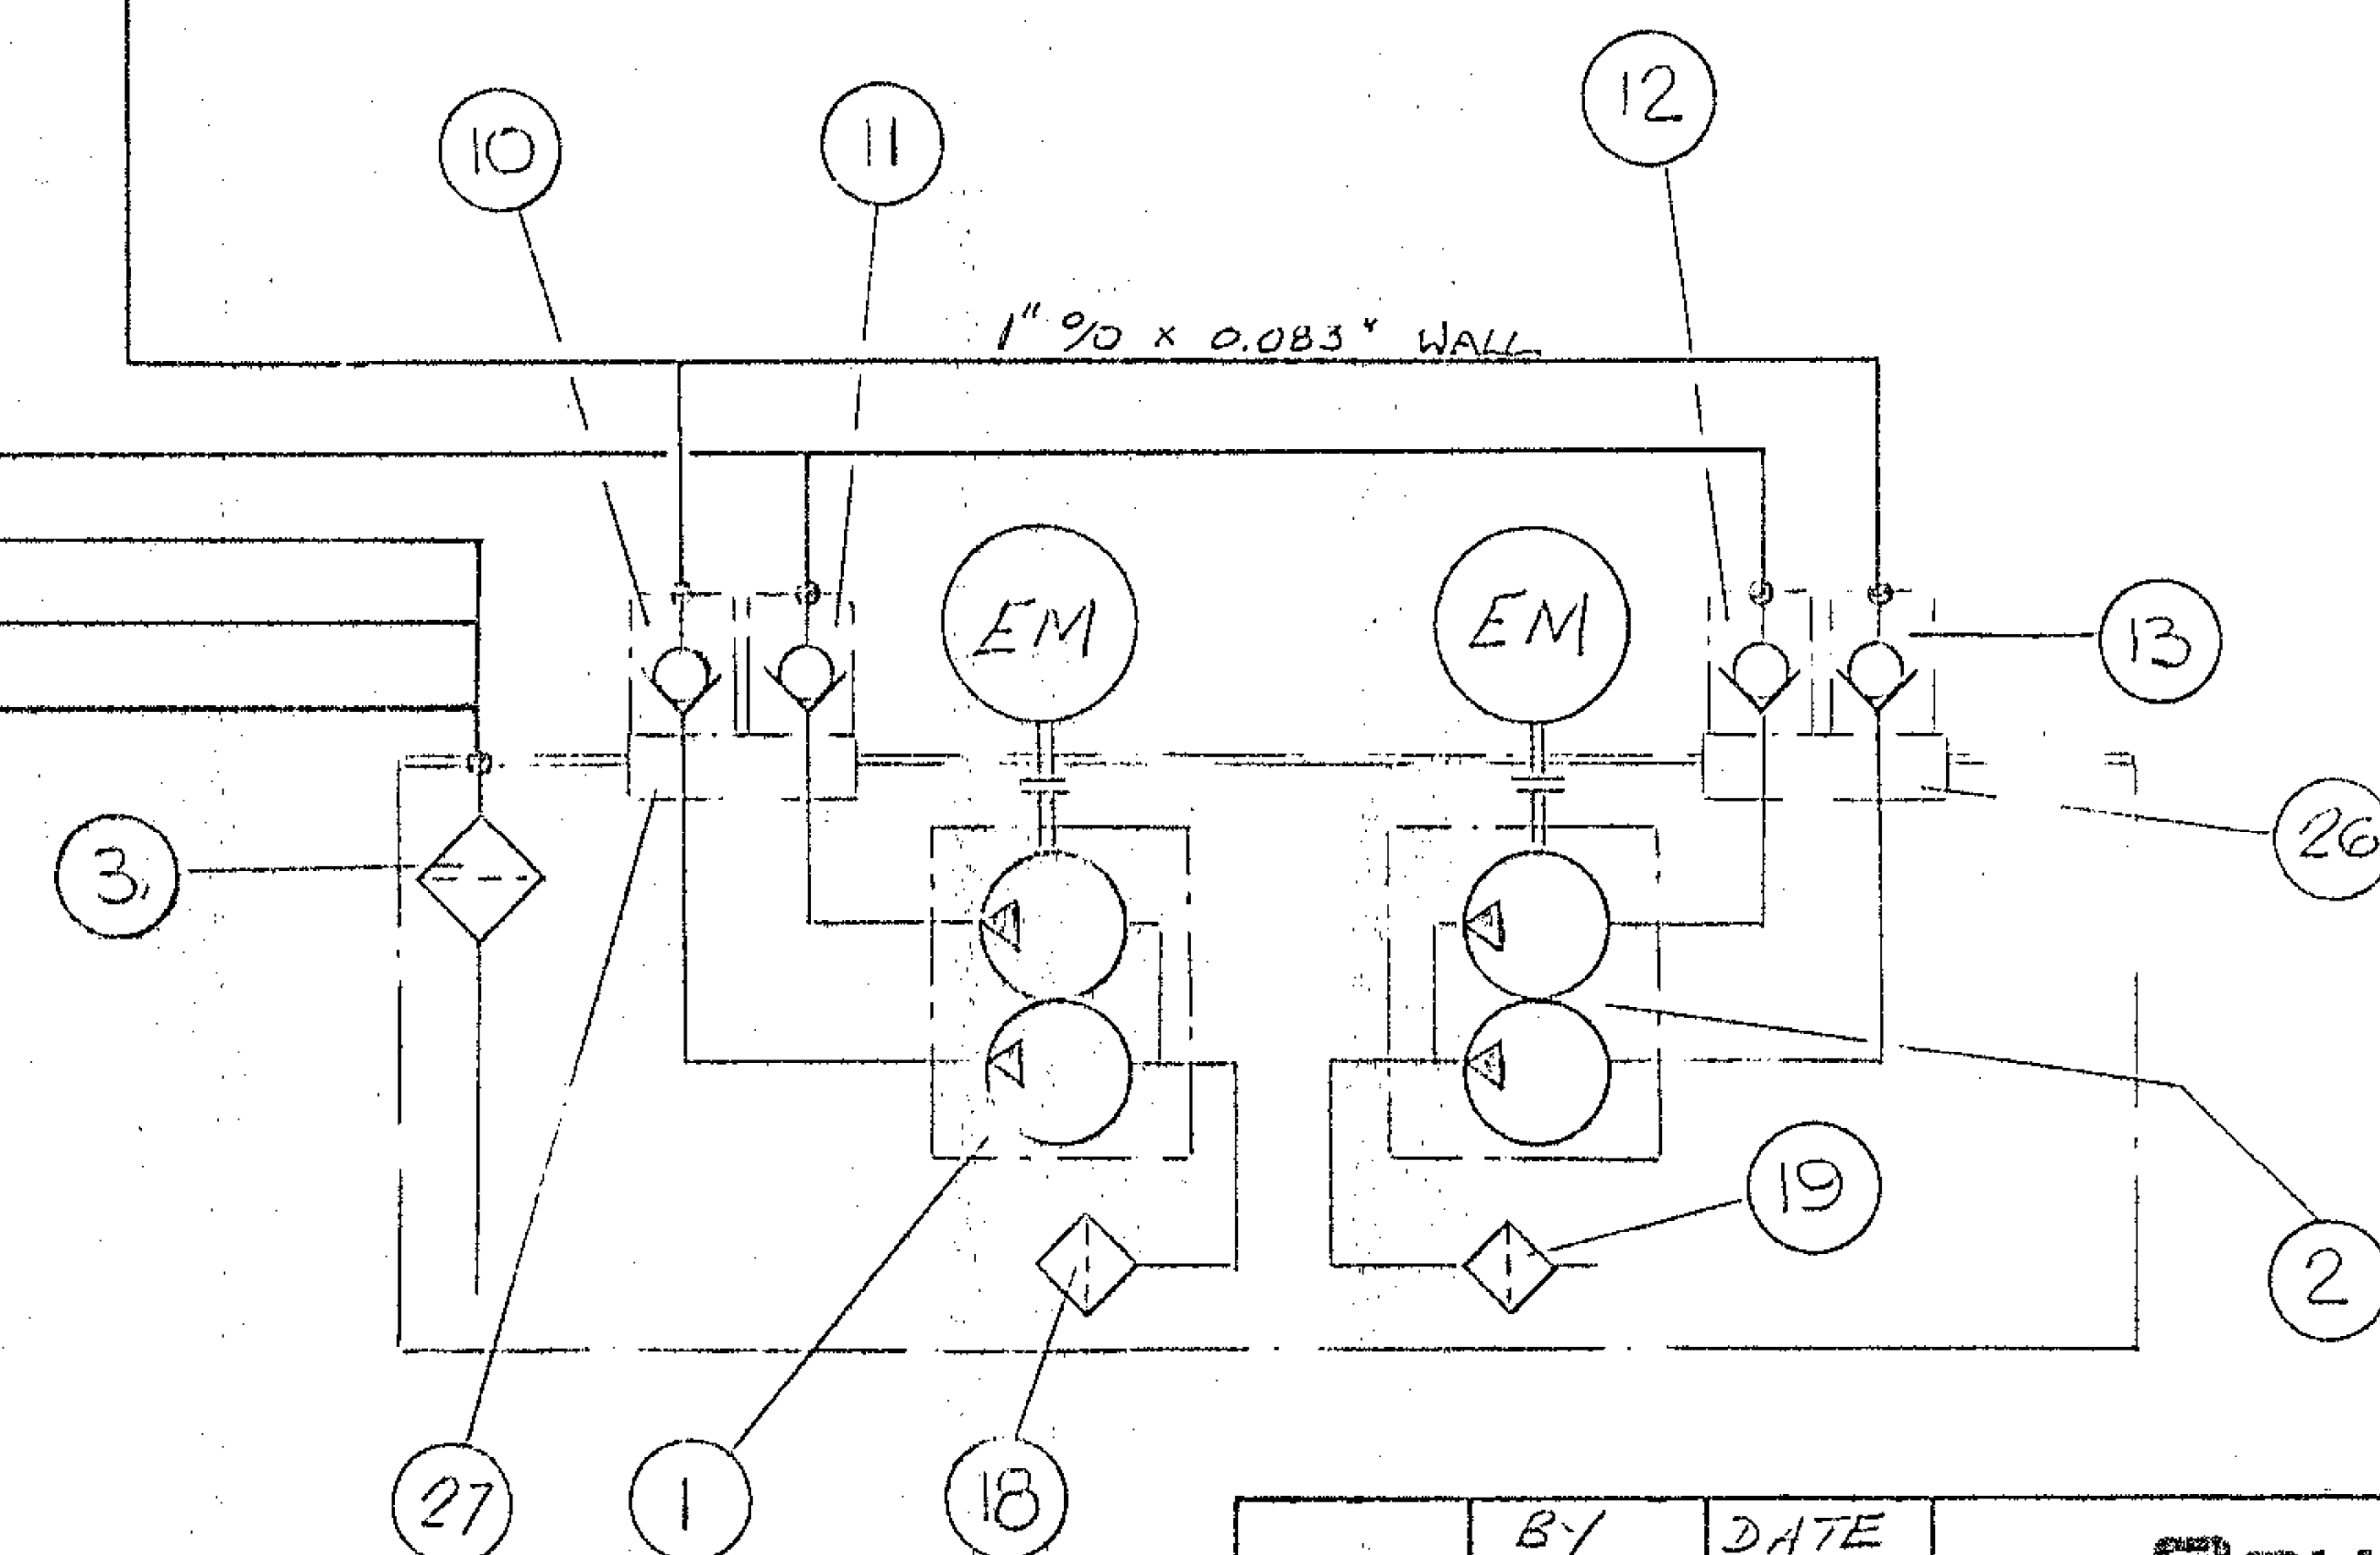

BY	DATE	SCHAT-DAVIT COMPANY	
ORN	RH		
CHCD	1/10		
SCHEMATIC CIRCUIT DIAGRAM		S	710815.