



PETER J. KINDREE ARCHITECT

79 Hinton Avenue N.
Ottawa K1Y 0Z7 (613) 860-1530



GOODKEY WEEDMARK & ASSOCIATES LIMITED
1688 Woodward Dr. 613 727-5111 Voice
Ottawa, Ontario 613 727-5115 Fax
Canada K2C 3R8 www.gwoi.com Web



L'ENTREPRENEUR DEVRA VÉRIFIER TOUTES LES DIMENSIONS ET LES CONDITIONS SUR LE CHANTIER ET AVISER SANS DÉLAI LE REPRÉSENTANT DU MINISTÈRE DE TOUTE ANOMALIE.
Contractor to verify all dimensions and conditions on site and immediately notify the departmental representative of all discrepancies.

revisions	description	date
3	ISSUED FOR TENDER	2019/05/23
2	ISSUED FOR TENDER	2019/05/03
1	ISSUED FOR 100% REVIEW	2019/04/08


project		project	
C.D. HOWE BLDG. LEVEL C2 FIT-UP			
235 QUEEN ST., OTTAWA, ONTARIO			
drawing		dessin	
LEVEL C2 CONSTRUCTION DETAIL PLANS			
Designed By	DL	Conçu par	
Date		(yyyy/mm/dd)	
Drawn By	AN/PJKA	Dessiné par	
Date		(yyyy/mm/dd)	
Reviewed By	DL	Examiné par	
Date	2019/05	(yyyy/mm/dd)	
Approved By	PK/DL	Approuvé par	
Date		(yyyy/mm/dd)	
Tender		Soumission	
Project Manager	ISMAT BEGUM	Administrateur de projets	
Project no.		No. du projet	
R.100325.004			
Drawing no.		No. du dessin	
A123			

LEGEND, A123

- AREA NOT IN CONTRACT
- EXISTING CONSTRUCTION CUT BY DRAWING PLANE TO REMAIN
- PLAN/SECTION CUT THROUGH NEW CONSTRUCTION (PARTITION TYPE AS INDICATED)
- BLOCKING AS PER NOTE
- NEW SWING DOOR AND FRAME. REFER TO DOOR SCHEDULE.


GENERAL NOTES, A123

- A. INSPECT THE EXISTING CONCRETE FLOOR SLAB FOR PREPARATION WORK REQUIRED FOR FINISH FLOOR APPLICATION AND REPORT FINDINGS TO FLOOR FINISH MANUFACTURER AND THE DEPARTMENTAL REPRESENTATIVE. REMOVE EXTRUSIONS AND PROJECTIONS (ASSUME 5% OF TOTAL AREA). FILL AND REPAIR ALL INDENTS, TRENCHES, GOUGES, DEPRESSIONS, FISSURES, OR CRACKS FOUND IN EXISTING CONCRETE FLOOR SLAB. (ASSUME 40% OF TOTAL AREA) WITH PATCHING COMPOUNDS COMPATIBLE WITH LEVELING COMPOUNDS AND TO FINISHED FLOOR.
- B. WHERE SHOWN FLUSH IN DRAWING, CONSTRUCT PARTITIONS/FURRING FLUSH WITH ADJACENT CONSTRUCTION.
- C. ALL PARTITION DIMENSIONS ARE TO FINISHED FACE OR EXISTING CONSTRUCTION UNLESS OTHERWISE NOTED.
- D. APPLY TRANSPARENT SECURITY FILM TO FULL INTERIOR FACE OF ALL PERIMETER GLAZING, INTERIOR AND EXTERIOR. APPLY CUSTOM PATTERNED PRIVACY FILM IN VISION AREA OVER SECURITY FILM AS SHOWN IN DETAILS A507 INCLUDING THE INTERIOR BAY WINDOW.
- E. DOORS DRAWN CENTERED IN PLAN TO BE CENTERED IN PLAN OF PARTITION UNLESS NOTED OTHERWISE.
- F. DOOR OPENINGS TO BE OFFSET 150mm FROM THE FINISHED FACE OF ADJACENT PERPENDICULAR PARTITION, UNLESS NOTED OTHERWISE.

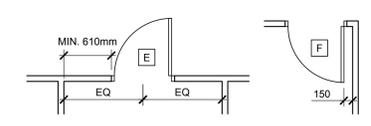


DRAWING NOTES, A123


1. FURRING ASSEMBLY SIMILAR TO P7 TO CONCEAL EXISTING MECHANICAL TO FINISH 100mm ABOVE CEILING.
2. PROVIDE BLOCKING TO SUPPORT NEW PLUMBING FIXTURES, WASHROOM ACCESSORIES, AND MILLWORK. TYPICAL.
3. LOCATION OF WALL-MOUNTED MONITOR OR TV BY DEPARTMENTAL REPRESENTATIVE.
4. 6mm FROSTED TEMPERED GLASS SCREEN WITH POLISHED SQUARE EDGE. REFER TO DETAIL B/A501.
5. PATCH AND REPAIR EXISTING GYPSUM BOARD FINISH. ALLOW 300mm DEPTH BY FULL HEIGHT.
6. BACK REST.
7. MIRROR COMPLIANT WITH CAN/CSA B651 2018.
8. COMBINATION PAPER TOWEL DISPENSER / DISPOSAL UNIT.
9. DOOR LOCKABLE FROM INSIDE W/ LATCH MECHANISM 900 TO 1000mm A.F.F.
10. POWER DOOR OPERATOR "PUSH TO OPEN".
11. POWER DOOR OPERATOR "PUSH TO LOCK".
12. EMERGENCY CALL BUTTON W/ SIGNAGE ABOVE "IN THE EVENT OF AN EMERGENCY, PUSH EMERGENCY BUTTON, AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE." W/ LETTERS 25mm HIGH W/ 5mm STROKE.
13. BLOCKING TO SUPPORT ADULT CHANGE TABLE.
14. COAT HOOK.
15. DOME LIGHT SOUNDER (MOUNTED CENTERED ABOVE DOOR).
16. SHELF - 200mm x 457mm.
17. CONSTRUCT PARTITION TYPE P4 CENTERED ON EXISTING PLUMBING STACKS TO BE CONCEALED IN CAVITY.
18. DIMENSIONS OF HUDDLE DETERMINED BASED ON FURNITURE PROVIDED BY DEPARTMENTAL REPRESENTATIVE, TYPICAL.
19. SANITARY NAPKIN DISPOSAL.
20. TPD - TOILET PAPER DISPENSER.
21. SOAP DISPENSER.
22. SUPPLY AND INSTALL WALL MOUNTED FOLDING ADULT CHANGE TABLE.
23. MINIMUM CLEAR OPENING FOR BARRIER-FREE STALL DOORS OF 860mm.
24. STRUCTURAL STEEL CROSS BRACING WITHIN WALL. TYPICAL. SEE STRUCTURAL.
25. STRUCTURAL STEEL POST WITHIN WALL. TYPICAL. SEE STRUCTURAL.
26. INSTALL WALL MOUNTED FABRIC COVERED 25mm THICK ACOUSTIC PANELS. 4 @ 1000 BY 1500mm EACH. TWO ON EITHER SIDE OF VESTIBULE.

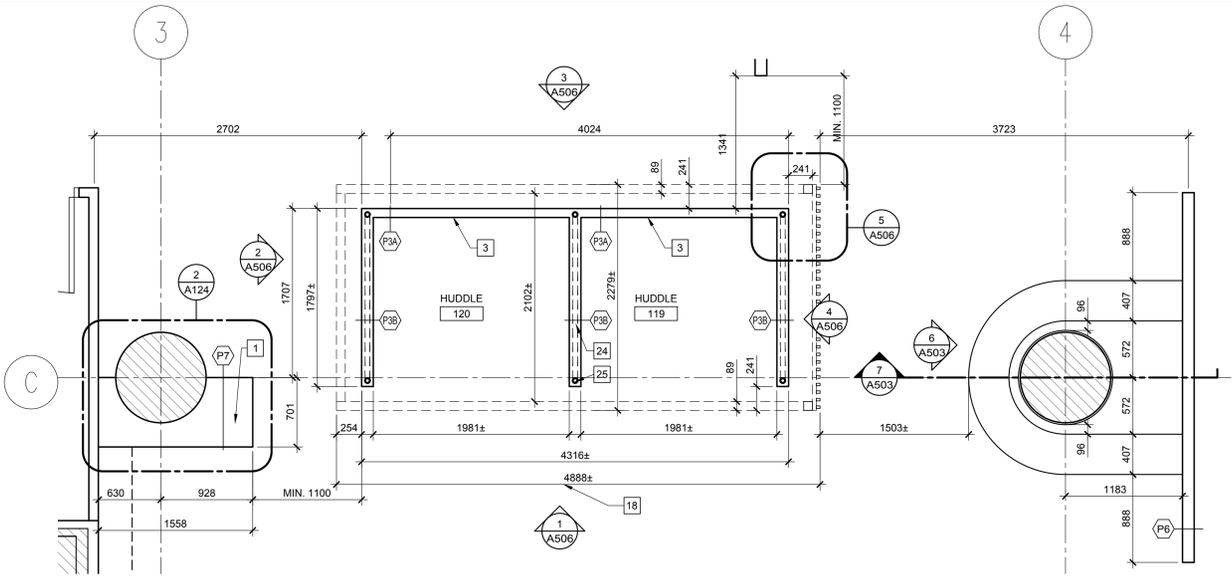

1 HUDDLES AND CHARGING STATION AREA PLAN DETAIL
SCALE / ÉCHELLE 1:30

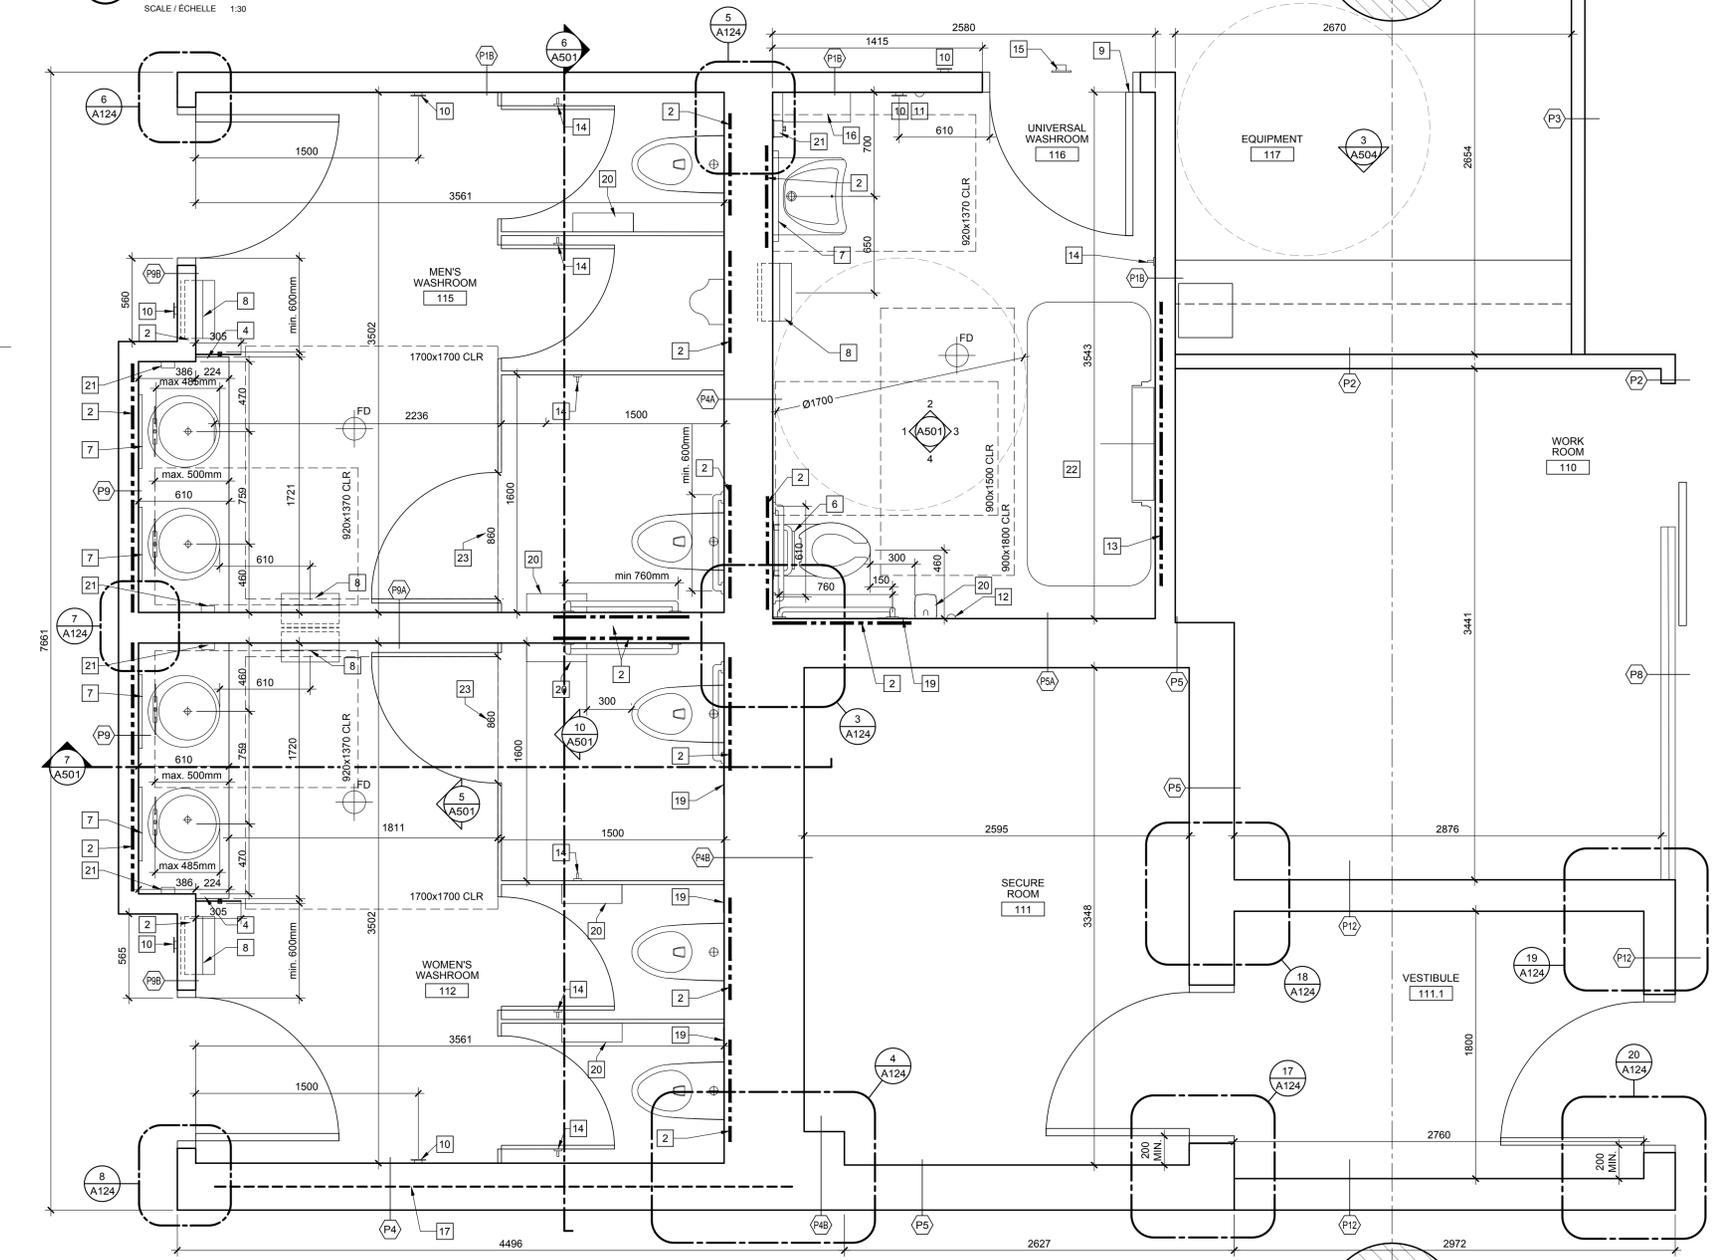

2 WASHROOM BLOCK PLAN DETAIL
SCALE / ÉCHELLE 1:20

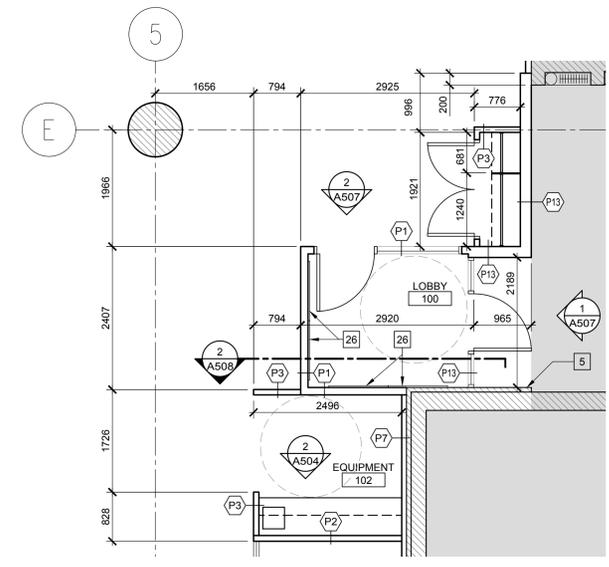

3 MALL LOBBY AREA PLAN DETAIL
SCALE / ÉCHELLE 1:50